

# 16-bit Proprietary Microcontrollers

CMOS

## F<sup>2</sup>MC-16LX MB90350E Series

MB90F351E (S) , MB90F351TE (S) , MB90F352E (S) , MB90F352TE (S) , MB90351E (S) , MB90351TE (S) , MB90352E (S) , MB90352TE (S) , MB90F356E (S) , MB90F356TE (S) , MB90F357E (S) , MB90F357TE (S) , MB90356E (S) , MB90356TE (S) , MB90357E (S) , MB90357TE(S) , MB90V340E-101/102/103/104

### ■ DESCRIPTION

The MB90350E series, loaded 1 channel FULL-CAN\* interface and Flash ROM, is general-purpose FUJITSU 16-bit microcontroller designing for automotive and industrial applications. Its main feature is the on-board CAN interface, which conforms to CAN standard Version2.0 Part A and Part B, while supporting a very flexible message buffer scheme and so offering more functions than a normal full CAN approach. With the new 0.35 μm CMOS technology, Fujitsu now offers on-chip Flash ROM program memory up to 128 Kbytes.

The power supply (3 V) is supplied to the MCU core from an internal regulator circuit. This creates a major advantage in terms of EMI and power consumption.

The PLL clock multiplication circuit provides an internal 42 ns instruction execution time from an external 4 MHz clock. Also, the clock supervisor function can monitor main clock and sub clock independently.

As the peripheral resources, the unit features a 4-channel Output Compare Unit, 6-channel Input Capture Unit, 2 separate 16-bit free-run timers, 2-channel UART and 15-channel 8/10-bit A/D converter built-in.

\* : Controller Area Network (CAN) - License of Robert Bosch GmbH

Note : F<sup>2</sup>MC is the abbreviation of FUJITSU Flexible Microcontroller.

Be sure to refer to the "Check Sheet" for the latest cautions on development.

"Check Sheet" is seen at the following support page

URL : <http://www.fujitsu.com/global/services/microelectronics/product/micom/support/index.html>

"Check Sheet" lists the minimal requirement items to be checked to prevent problems beforehand in system development.

# MB90350E Series

## ■ FEATURES

### • Clock

- Built-in PLL clock frequency multiplication circuit
- Selection of machine clocks (PLL clocks) is allowed among frequency division by two on oscillation clock, and multiplication of 1 to 6 times of oscillation clock (for 4 MHz oscillation clock, 4 MHz to 24 MHz).
- Operation by sub clock (up to 50 kHz : 100 kHz oscillation clock divided by two) is allowed (devices without S-suffix only) .
- Minimum execution time of instruction : 42 ns (when operating with 4-MHz oscillation clock, and 6-time multiplied PLL clock).
- Built-in clock modulation circuit

### • 16 Mbytes CPU memory space

24-bit internal addressing

### • Instruction system best suited to controller

- Wide choice of data types (bit, byte, word, and long word)
- Wide choice of addressing modes (23 types)
- Enhanced multiply-divide instructions with sign and RETI instructions

### • Clock supervisor (MB90x356x and MB90x357x only)

- Main clock or sub clock is monitored independently.
- Internal CR oscillation clock (100 kHz typical) can be used as sub clock.

### • Enhanced high-precision computing with 32-bit accumulator

### • Instruction system compatible with high-level language (C language) and multitask

- Employing system stack pointer
- Enhanced various pointer indirect instructions
- Barrel shift instructions

### • Increased processing speed

4-byte instruction queue

### • Powerful interrupt function

- Powerful 8-level, 34-condition interrupt feature
- Up to 8 channels external interrupts are supported.

### • Automatic data transfer function independent of CPU

- Extended intelligent I/O service function (EI<sup>2</sup>OS) : up to 16 channels
- DMA : up to 16 channels

### • Low power consumption (standby) mode

- Sleep mode (a mode that stops CPU operating clock)
- Main timer mode (a timebase timer mode switched from the main clock mode)
- PLL timer mode (a timebase timer mode switched from the PLL clock mode)
- Watch mode (a mode that operates sub clock and watch timer only)
- Stop mode (a mode that stops oscillation clock and sub clock)
- CPU intermittent operation mode

### • Process

CMOS technology

### • I/O port

- General-purpose input/output port (CMOS output)
  - 49 ports (devices without S-suffix : devices that correspond to sub clock)
  - 51 ports (devices with S-suffix : devices that do not correspond to sub clock)

(Continued)

- **Sub clock pin (X0A, X1A)**
  - Yes (using the external oscillation) : devices without S-suffix
  - No (using the sub clock mode at internal CR oscillation) : devices with S-suffix
- **Timer**
  - Timebase timer, watch timer, watchdog timer : 1 channel
  - 8/16-bit PPG timer : 8-bit × 10 channels or 16-bit × 6 channels
  - 16-bit reload timer : 2 channels (only Evaluation products has 4 channels)
  - 16-bit input/output timer
    - 16-bit free-run timer : 2 channels (FRT0 : ICU0/1, FRT1 : ICU4/5/6/7, OCU4/5/6/7)
    - 16-bit input capture: (ICU) : 6 channels
    - 16-bit output compare : (OCU) : 4 channels
- **FULL-CAN interface : 1 channel**
  - Compliant with CAN standard Version2.0 Part A and Part B
  - 16 message buffers are built-in
  - CAN wake-up function
- **UART (LIN/SCI) : 2 channels**
  - Equipped with full-duplex double buffer
  - Clock-asynchronous or clock-synchronous serial transmission is available.
- **I<sup>2</sup>C interface\*1 : 1 channel**
  - Up to 400 kbps transfer rate
- **DTP/External interrupt : 8 channels, CAN wakeup : 1 channel**
  - Module for activation of extended intelligent I/O service (EI<sup>2</sup>OS), DMA, and generation of external interrupt by external input.
- **Delay interrupt generator module**
  - Generates interrupt request for task switching.
- **8/10-bit A/D converter : 15 channels**
  - Resolution is selectable between 8-bit and 10-bit.
  - Activation by external trigger input is allowed.
  - Conversion time : 3 μs (at 24-MHz machine clock, including sampling time)
- **Program patch function**
  - Address matching detection for 6 address pointers.
- **Capable of changing input voltage level for port**
  - Automotive/CMOS-Schmitt (initial level is Automotive in single chip mode)
  - TTL level (corresponds to external bus pins only, initial level of these pins is TTL in external bus mode)
- **Low voltage/CPU operation detection reset (devices with T-suffix)**
  - Detects low voltage (4.0 V ± 0.3 V) and resets automatically
  - Resets automatically when program is runaway and counter is not cleared within interval time (approx. 262 ms : external 4 MHz)
- **Dual operation Flash memory**
  - Erase/write and read can be executed in the different bank (Upper Bank/Lower Bank) at the same time.
- **Supported T<sub>A</sub> = + 125 °C**
  - The maximum operating frequency is 24 MHz\*2 : (at T<sub>A</sub> = +125 °C) .

(Continued)

# MB90350E Series

*(Continued)*

- **Flash security function**

- Protects the content of Flash memory  
(MB90F352x, MB90F357x only)

- **External bus interface**

- 4 Mbytes external memory space  
MB90F351E(S), MB90F351TE(S), MB90F352E(S), MB90F352TE(S) : External bus Interface can not be used in internal vector mode. It can be used only in external vector mode.

\*1 : I<sup>2</sup>C license :

Purchase of Fujitsu I<sup>2</sup>C components conveys a license under the Philips I<sup>2</sup>C Patent Rights to use, these components in an I<sup>2</sup>C system provided that the system conforms to the I<sup>2</sup>C Standard Specification as defined by Philips.

\*2 : If used exceeding  $T_A = + 105\text{ }^\circ\text{C}$ , be sure to contact Fujitsu for reliability limitations.

# MB90350E Series

## ■ PRODUCT LINEUP1 (Without Clock supervisor function)

•Flash memory products

Part Number	MB90F351E, MB90F352E	MB90F351TE, MB90F352TE	MB90F351ES, MB90F352ES	MB90F351TES, MB90F352TES
Type	Flash memory products			
CPU	F <sup>2</sup> MC-16LX CPU			
System clock	PLL clock multiplication circuit (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops) Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)			
ROM	64 Kbytes Flash memory : MB90F351E(S), MB90F351TE(S) 128 Kbytes Dual operation Flash memory (Erase/write and read can be operated at the same time) : MB90F352E(S), MB90F352TE(S)			
RAM	4 Kbytes			
Emulator-specific power supply*1	—			
Sub clock pin (X0A, X1A) (Max 100 kHz)	Yes		No	
Clock supervisor	No			
Low voltage/CPU operation detection reset	No	Yes	No	Yes
Operating voltage	3.5 V to 5.5 V : at normal operating (not using A/D converter) 4.0 V to 5.5 V : at using A/D converter/Flash programming 4.5 V to 5.5 V : at using external bus			
Operating temperature	−40 °C to +125 °C			
Package	LQFP-64			
UART	2 channels			
	Wide range of baud rate settings using a dedicated reload timer Special synchronous options for adapting to different synchronous serial protocols LIN functionality working either as master or slave LIN device			
I <sup>2</sup> C (400 kbps)	1 channel			
A/D converter	15 channels			
	10-bit or 8-bit resolution Conversion time : Min 3 μs includes sample time (per one channel)			
16-bit reload timer (2 channels)	Operation clock frequency : $f_{sys}/2^1$ , $f_{sys}/2^3$ , $f_{sys}/2^5$ ( $f_{sys}$ = Machine clock frequency) Supports External Event Count function.			
16-bit I/O timer (2 channels)	I/O Timer 0 (clock input FRCK0) corresponds to ICU0/1. I/O Timer 1 (clock input FRCK1) corresponds to ICU4/5/6/7, OCU4/5/6/7.			
	Signals an interrupt when overflowing. Supports Timer Clear when it matches Output Compare (ch.0, ch.4) . Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ , $f_{sys}/2^5$ , $f_{sys}/2^6$ , $f_{sys}/2^7$ ( $f_{sys}$ = Machine clock frequency)			
16-bit output compare	4 channels			
	Signals an interrupt when 16-bit I/O Timer matches with output compare registers. A pair of compare registers can be used to generate an output signal.			

(Continued)

# MB90350E Series

(Continued)

Part Number Parameter	MB90F351E, MB90F352E	MB90F351TE, MB90F352TE	MB90F351ES, MB90F352ES	MB90F351TES, MB90F352TES
16-bit Input capture	6 channels			
	Retains free-run timer value by (rising edge, falling edge or rising & falling edge) , signals an interrupt.			
8/16-bit programmable pulse generator	6 channels (16-bit)/10 channels (8-bit) 8-bit reload counters × 12 8-bit reload registers for L pulse width × 12 8-bit reload registers for H pulse width × 12			
	Supports 8-bit and 16-bit operation modes. A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter. Operation clock frequency : fsys, fsys/2 <sup>1</sup> , fsys/2 <sup>2</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>4</sup> or 128 μs@fosc = 4 MHz (fsys = Machine clock frequency, fosc = Oscillation clock frequency)			
CAN interface	1 channel			
	Compliant with CAN standard Version2.0 Part A and Part B. Automatic re-transmission in case of error Automatic transmission responding to Remote Frame 16 prioritized message buffers for data and ID Supports multiple messages. Flexible configuration of acceptance filtering : Full bit compare/Full bit mask/Two partial bit masks Supports up to 1 Mbps.			
External interrupt	8 channels			
	Can be used rising edge, falling edge, starting up by “H”/“L” level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.			
D/A converter	—			
I/O ports	Virtually all external pins can be used as general purpose I/O port. All push-pull outputs Bit-wise settable as input/output or peripheral signal Settable as CMOS schmitt trigger/ automotive inputs TTL input level settable for external bus (only for external bus pin)			
Flash memory	Supports automatic programming, Embedded Algorithm™*2 Write/Erase/Erased-Suspend/Resume commands A flag indicating completion of the algorithm Number of erase cycles : 10000 times Data retention time : 20 years Boot block configuration Erase can be performed on each block. Block protection with external programming voltage Flash Security Feature for protecting the content of the Flash (MB90F352E(S) and MB90F352TE(S) only)			
Corresponding evaluation name	MB90V340E-102		MB90V340E-101	

\*1 : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

\*2 : Embedded Algorithm is a trademark of Advanced Micro Devices Inc.

# MB90350E Series

• MASK ROM products/Evaluation products

Part Number	MB90351E, MB90352E	MB90351TE, MB90352TE	MB90351ES, MB90352ES	MB90351TES, MB90352TES	MB90V340E- 101	MB90V340E- 102
Parameter	MASK ROM products				Evaluation products	
Type	MASK ROM products				Evaluation products	
CPU	F <sup>2</sup> MC-16LX CPU					
System clock	PLL clock multiplication circuit (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops) Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)					
ROM	MASK ROM 64 Kbytes : MB90351E(S), MB90351TE(S) 128 Kbytes : MB90352E(S), MB90352TE(S)				External	
RAM	4 Kbytes				30 Kbytes	
Emulator-specific power supply*	—				Yes	
Sub clock pin (X0A, X1A) (Max 100 kHz)	Yes		No		No	Yes
Clock supervisor	No					
Low voltage/CPU operation detection reset	No	Yes	No	Yes	No	
Operating voltage range	3.5 V to 5.5 V : at normal operating (not using A/D converter) 4.0 V to 5.5 V : at using A/D converter 4.5 V to 5.5 V : at using external bus				5 V ± 10%	
Operating temperature range	-40 °C to +125 °C				—	
Package	LQFP-64				PGA-299	
UART	2 channels				5 channels	
	Wide range of baud rate settings using a dedicated reload timer Special synchronous options for adapting to different synchronous serial protocols LIN functionality working either as master or slave LIN device					
I <sup>2</sup> C (400 kbps)	1 channel				2 channels	
A/D converter	15 channels				24 channels	
	10-bit or 8-bit resolution Conversion time : Min 3 μs includes sample time (per one channel)					
16-bit reload timer	2 channels				4 channels	
	Operation clock frequency : f <sub>sys</sub> /2 <sup>1</sup> , f <sub>sys</sub> /2 <sup>3</sup> , f <sub>sys</sub> /2 <sup>5</sup> (f <sub>sys</sub> = Machine clock frequency) Supports External Event Count function.					
16-bit I/O timer (2 channels)	I/O Timer 0 (clock input FRCK0) corresponds to ICU0/1. I/O Timer 1 (clock input FRCK1) corresponds to ICU4/5/6/7, OCU4/5/6/7.				I/O Timer 0 corresponds to ICU0/1/2/3, OCU0/1/2/3. I/O Timer 1 corresponds to ICU4/5/6/7, OCU4/5/6/7.	
	Signals an interrupt when overflowing. Supports Timer Clear when it matches Output Compare (ch.0, ch.4) . Operation clock frequency : f <sub>sys</sub> , f <sub>sys</sub> /2 <sup>1</sup> , f <sub>sys</sub> /2 <sup>2</sup> , f <sub>sys</sub> /2 <sup>3</sup> , f <sub>sys</sub> /2 <sup>4</sup> , f <sub>sys</sub> /2 <sup>5</sup> , f <sub>sys</sub> /2 <sup>6</sup> , f <sub>sys</sub> /2 <sup>7</sup> (f <sub>sys</sub> = Machine clock frequency)					

(Continued)

# MB90350E Series

(Continued)

Part Number Parameter	MB90351E, MB90352E	MB90351TE, MB90352TE	MB90351ES, MB90352ES	MB90351TES, MB90352TES	MB90V340E- 101	MB90V340E- 102
16-bit output compare	4 channels				8 channels	
	Signals an interrupt when 16-bit I/O Timer matches output compare registers. A pair of compare registers can be used to generate an output signal.					
16-bit input capture	6 channels				8 channels	
	Retains free-run timer value by (rising edge, falling edge, or the both edges), signals an interrupt.					
8/16-bit programmable pulse generator	6 channels (16-bit)/10 channels (8-bit) 8-bit reload counters × 12 8-bit reload registers for L pulse width × 12 8-bit reload registers for H pulse width × 12				8 channels (16-bit)/ 16 channels (8-bit) 8-bit reload counters × 16 8-bit reload registers for L pulse width × 16 8-bit reload registers for H pulse width × 16	
	Supports 8-bit and 16-bit operation modes. A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter. Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ or $128 \mu s @ f_{osc} = 4 \text{ MHz}$ ( $f_{sys}$ = Machine clock frequency, $f_{osc}$ = Oscillation clock frequency)					
CAN interface	1 channel				3 channels	
	Compliant with CAN standard Version 2.0 Part A and Part B. Automatic re-transmission in case of error Automatic transmission responding to Remote Frame 16 prioritized message buffers for data and ID Supports multiple messages. Flexible configuration of acceptance filtering : Full bit compare/Full bit mask/Two partial bit masks Supports up to 1 Mbps.					
External interrupt	8 channels				16 channels	
	Can be used rising edge, falling edge, starting up by "H"/"L" level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.					
D/A converter	—				2 channels	
I/O ports	Virtually all external pins can be used as general purpose I/O port. All push-pull outputs Bit-wise settable as input/output or peripheral signal Settable as CMOS schmitt trigger/ automotive inputs TTL input level settable for external bus (only for external bus pin)					
Flash memory	—					
Corresponding evaluation name	MB90V340E-102		MB90V340E-101		—	

\* : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.



# MB90350E Series

## ■ PRODUCT LINEUP 2 (With Clock supervisor function)

- Flash memory products

Part Number	MB90F356E, MB90F357E	MB90F356TE, MB90F357TE	MB90F356ES, MB90F357ES	MB90F356TES, MB90F357TES
Type	Flash memory products			
CPU	F <sup>2</sup> MC-16LX CPU			
System clock	On-chip PLL clock multiplier (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops) Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)			
ROM	Dual operation flash memory 64 Kbytes : MB90F356E(S), MB90F356TE(S) 128 Kbytes : MB90F357E(S), MB90F357TE(S)			
RAM	4 Kbytes			
Emulator-specific power supply*1	—			
Sub clock pin (X0A, X1A)	Yes		No (internal CR oscillation can be used as sub clock)	
Clock supervisor	Yes			
Low voltage/CPU operation detection reset	No	Yes	No	Yes
Operating voltage range	3.5 V to 5.5 V : at normal operating (not using A/D converter) 3.5 V to 5.5 V : at using A/D converter/Flash programming 3.5 V to 5.5 V : at using external bus			
Operating temperature range	-40 °C to +125 °C			
Package	LQFP-64			
UART	2 channels			
	Wide range of baud rate settings using a dedicated reload timer Special synchronous options for adapting to different synchronous serial protocols LIN functionality working either as master or slave LIN device			
I <sup>2</sup> C (400 kbps)	1 channel			
A/D Converter	15 channels			
	10-bit or 8-bit resolution Conversion time : Min 3 μs includes sample time (per one channel)			
16-bit Reload Timer (4 channels)	Operation clock frequency : $f_{sys}/2^1$ , $f_{sys}/2^3$ , $f_{sys}/2^5$ ( $f_{sys}$ = Machine clock frequency) Supports External Event Count function.			
16-bit I/O Timer (2 channels)	I/O Timer 0 (clock input FRCK0) corresponds to ICU 0/1. I/O Timer 1 (clock input FRCK1) corresponds to ICU 4/5/6/7, OCU 4/5/6/7.			
	Signals an interrupt when overflowing. Supports Timer Clear when a match with Output Compare (Channel 0, 4) . Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ , $f_{sys}/2^5$ , $f_{sys}/2^6$ , $f_{sys}/2^7$ ( $f_{sys}$ = Machine clock frequency)			
16-bit Output Compare	4 channels			
	Signals an interrupt when 16-bit I/O Timer matches with output compare registers. A pair of compare registers can be used to generate an output signal.			

(Continued)

# MB90350E Series

(Continued)

Part Number Parameter	MB90F356E, MB90F357E	MB90F356TE, MB90F357TE	MB90F356ES, MB90F357ES	MB90F356TES, MB90F357TES
16-bit Input Capture	6 channels			
	Retains free-run timer value by (rising edge, falling edge or rising & falling edge), signals an interrupt.			
8/16-bit Programmable Pulse Generator	6 channels (16-bit)/10 channels (8-bit) 8-bit reload counters × 12 8-bit reload registers for L pulse width × 12 8-bit reload registers for H pulse width × 12			
	Supports 8-bit and 16-bit operation modes. A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter. Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ or $128 \mu s @ f_{osc} = 4 \text{ MHz}$ ( $f_{sys}$ = Machine clock frequency, $f_{osc}$ = Oscillation clock frequency)			
CAN Interface	1 channel			
	Conforms to CAN Specification Version 2.0 Part A and B. Automatic re-transmission in case of error Automatic transmission responding to Remote Frame Prioritized 16 message buffers for data and ID Supports multiple messages. Flexible configuration of acceptance filtering : Full bit compare/Full bit mask/Two partial bit masks Supports up to 1 Mbps.			
External Interrupt	8 channels			
	Can be used rising edge, falling edge, starting up by H/L level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.			
D/A converter	—			
I/O Ports	Virtually all external pins can be used as general purpose I/O port. All push-pull outputs Bit-wise settable as input/output or peripheral module signal Settable as CMOS schmitt trigger/ automotive inputs TTL input level settable for external bus (only for external bus pin)			
Flash Memory	Supports automatic programming, Embedded Algorithm <sup>TM*2</sup> Write/Erase/Erased-Suspend/Resume commands A flag indicating completion of the algorithm Number of erase cycles : 10000 times Data retention time : 10 years Boot block configuration Erase can be performed on each block. Block protection with external programming voltage Flash Security Feature for protecting the content of the Flash (MB90F357x only)			
Corresponding EVA name	MB90V340E-104		MB90V340E-103	

\*1 : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

\*2 : Embedded Algorithm is a trademark of Advanced Micro Devices Inc.

# MB90350E Series

• MASK ROM products/Evaluation products

Part Number Parameter	MB90356E, MB90357E	MB90356TE, MB90357TE	MB90356ES, MB90357ES	MB90356TES, MB90357TES	MB90V340E- 103	MB90V340E- 104
CPU	F <sup>2</sup> MC-16LX CPU					
System clock	On-chip PLL clock multiplier (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops) Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)					
ROM	MASK ROM 64 Kbytes :MB90356E(S), MB90356TE(S) 128 Kbytes :MB90357E(S), MB90357TE(S)				External	
RAM	4 Kbytes				30 Kbytes	
Emulator-specific power supply*	—				Yes	
Sub clock pin (X0A, X1A)	Yes		No (internal CR oscillation can be used as sub clock)		No (internal CR oscillation can be used as sub clock)	Yes
Clock supervisor	Yes					
Low voltage/CPU operation detection reset	No	Yes	No	Yes	No	
Operating voltage range	3.5 V to 5.5 V : at normal operating (not using A/D converter) 4.0 V to 5.5 V : at using A/D converter 4.5 V to 5.5 V : at using external bus				5 V ± 10%	
Operating temperature range	-40 °C to +125 °C				—	
Package	LQFP-64				PGA-299	
UART	2 channels				5 channels	
	Wide range of baud rate settings using a dedicated reload timer Special synchronous options for adapting to different synchronous serial protocols LIN functionality working either as master or slave LIN device					
I <sup>2</sup> C (400 kbps)	1 channel				2 channels	
A/D Converter	15 channels				24 channels	
	10-bit or 8-bit resolution Conversion time : Min 3 μs includes sample time (per one channel)					
16-bit Reload Timer (4 channels)	Operation clock frequency : fsys/2 <sup>1</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>5</sup> (fsys = Machine clock frequency) Supports External Event Count function.					
16-bit I/O Timer (2 channels)	I/O Timer 0 (clock input FRCK0) corresponds to ICU 0/1. I/O Timer 1 (clock input FRCK1) corresponds to ICU 4/5/6/7, OCU 4/5/6/7.				I/O Timer 0 corresponds to ICU 0/1/2/3, OCU 0/1/2/3. I/O Timer 1 corresponds to ICU 4/5/6/7, OCU 4/5/6/7.	
	Signals an interrupt when overflowing. Supports Timer Clear when a match with Output Compare (Channel 0, 4) . Operation clock frequency : fsys, fsys/2 <sup>1</sup> , fsys/2 <sup>2</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>4</sup> , fsys/2 <sup>5</sup> , fsys/2 <sup>6</sup> , fsys/2 <sup>7</sup> (fsys = Machine clock frequency)					

(Continued)

# MB90350E Series

(Continued)

Part Number Parameter	MB90356E, MB90357E	MB90356TE, MB90357TE	MB90356ES, MB90357ES	MB90356TES, MB90357TES	MB90V340E- 103	MB90V340E- 104
16-bit Output Compare	4 channels				8 channels	
	Signals an interrupt when 16-bit I/O Timer matches with output compare registers. A pair of compare registers can be used to generate an output signal.					
16-bit Input Capture	6 channels				8 channels	
	Retains free-run timer value by (rising edge, falling edge or rising & falling edge), signals an interrupt.					
8/16-bit Programmable Pulse Generator	6 channels (16-bit)/10 channels (8-bit) 8-bit reload counters × 12 8-bit reload registers for L pulse width × 12 8-bit reload registers for H pulse width × 12				8 channels (16-bit)/ 16 channels (8-bit) 8-bit reload counters × 16 8-bit reload registers for L pulse width × 16 8-bit reload registers for H pulse width × 16	
	Supports 8-bit and 16-bit operation modes. A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter. Operation clock frequency : fsys, fsys/2 <sup>1</sup> , fsys/2 <sup>2</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>4</sup> or 128 μs@fosc = 4 MHz (fsys = Machine clock frequency, fosc = Oscillation clock frequency)					
CAN Interface	1 channel				3 channels	
	Conforms to CAN Specification Version 2.0 Part A and B. Automatic re-transmission in case of error Automatic transmission responding to Remote Frame Prioritized 16 message buffers for data and ID Supports multiple messages. Flexible configuration of acceptance filtering : Full bit compare/Full bit mask/Two partial bit masks Supports up to 1 Mbps.					
External Interrupt	8 channels				16 channels	
	Can be used rising edge, falling edge, starting up by H/L level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.					
D/A converter	—				2 channels	
I/O Ports	Virtually all external pins can be used as general purpose I/O port. All push-pull outputs Bit-wise settable as input/output or peripheral module signal Settable as CMOS schmitt trigger/ automotive inputs TTL input level settable for external bus (only for external bus pin)					
Flash Memory	—					
Corresponding EVA name	MB90V340E-104		MB90V340E-103		—	

\* : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

# MB90350E Series

## ■ PACKAGES AND PRODUCT CORRESPONDENCE

Package	MB90V340E-101, MB90V340E-102, MB90V340E-103, MB90V340E-104	MB90F351E (S) , MB90F351TE (S) MB90F352E (S) , MB90F352TE (S) MB90F356E (S) , MB90F356TE (S) MB90F357E (S) , MB90F357TE (S) MB90351E (S) , MB90351TE (S) MB90352E (S) , MB90352TE (S) MB90356E (S) , MB90356TE (S) MB90357E (S) , MB90357TE (S)
PGA-299C-A01	○	×
FPT-64P-M23 (12.0 mm □ , 0.65 mm pitch)	×	○
FPT-64P-M24 (10.0 mm □ , 0.50 mm pitch)	×	○


○ : Yes, × : No

Note : Refer to “■ PACKAGE DIMENSIONS” for detail of each package.

# MB90350E Series

## ■ PIN ASSIGNMENTS

- MB90F351E(S), MB90F351TE(S), MB90F352E(S), MB90F352TE(S), MB90F356E(S), MB90F356TE(S), MB90F357E(S), MB90F357TE(S), MB90351E(S), MB90351TE(S), MB90352E(S), MB90352TE(S), MB90356E(S), MB90356TE(S), MB90357E(S), MB90357TE(S)

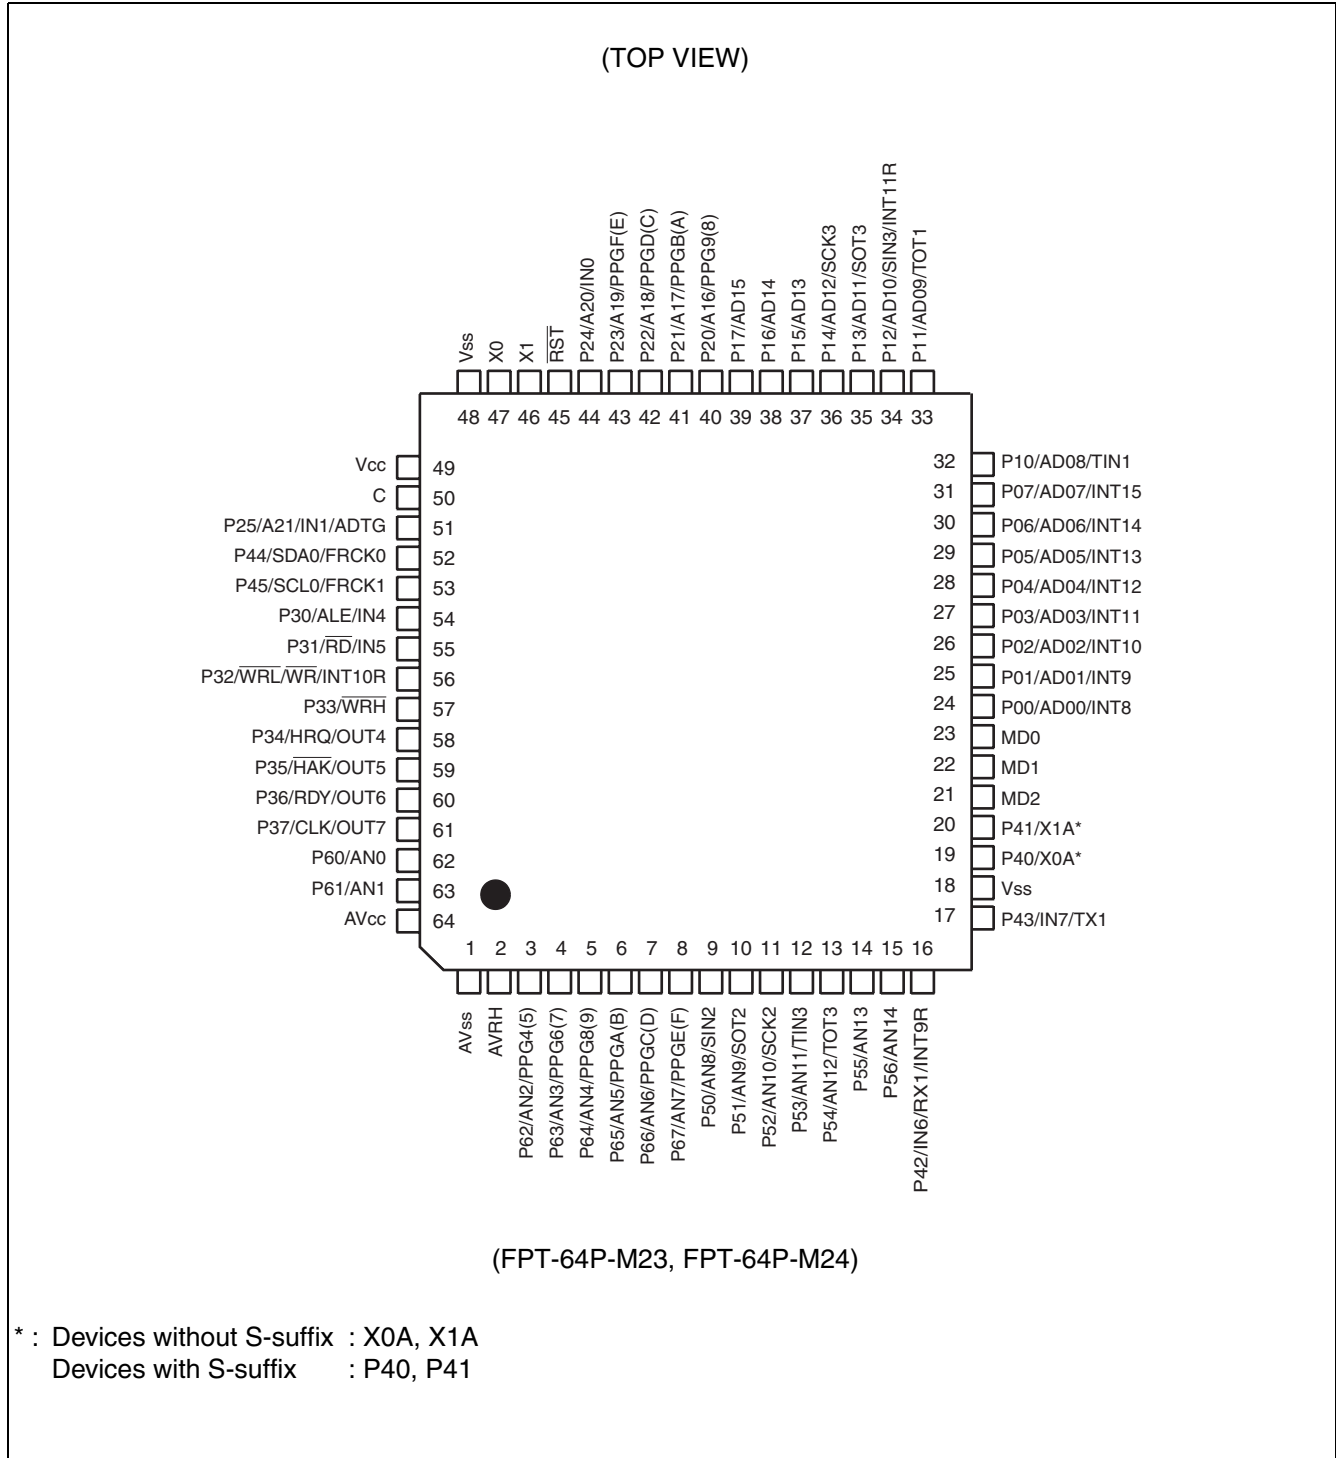

## ■ PIN DESCRIPTION

Pin No.	Pin name	I/O Circuit type*	Function
46	X1	A	Oscillation output pin
47	X0		Oscillation input pin
45	$\overline{RST}$	E	Reset input pin
3 to 8	P62 to P67	I	General purpose I/O ports
	AN2 to AN7		Analog input pins for A/D converter
	PPG4 (5), 6 (7), 8 (9), A (B), C (D), E (F)		Output pins for PPGs
9	P50	O	General purpose I/O port
	AN8		Analog input pin for A/D converter
	SIN2		Serial data input pin for UART2
10	P51	I	General purpose I/O port
	AN9		Analog input pin for A/D converter
	SOT2		Serial data output pin for UART2
11	P52	I	General purpose I/O port
	AN10		Analog input pin for A/D converter
	SCK2		Serial clock I/O pin for UART2
12	P53	I	General purpose I/O port
	AN11		Analog input pin for A/D converter
	TIN3		Event input pin for reload timer3
13	P54	I	General purpose I/O port
	AN12		Analog input pin for A/D converter
	TOT3		Output pin for reload timer3
14, 15	P55, P56	I	General purpose I/O ports
	AN13, AN14		Analog input pins for A/D converter
16	P42	F	General purpose I/O port
	IN6		Data sample input pin for input capture ICU6
	RX1		RX input pin for CAN1
	INT9R		External interrupt request input pin for INT9
17	P43	F	General purpose I/O port
	IN7		Data sample input pin for input capture ICU7
	TX1		TX output pin for CAN1
19, 20	P40, P41	F	General purpose I/O ports (devices with S-suffix and MB90V340E-101/103)
	X0A, X1A	B	X0A : Oscillation input pins for sub clock X1A : Oscillation output pins for sub clock (devices without S-suffix and MB90V340E-102/104)

(Continued)

# MB90350E Series

Pin No.	Pin name	I/O Circuit type*	Function
24 to 31	P00 to P07	G	General purpose I/O ports. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD00 to AD07		Input/output pins of external address data bus lower 8 bits. This function is enabled when the external bus is enabled.
	INT8 to INT15		External interrupt request input pins for INT8 to INT15
32	P10	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD08		Input/output pin for external bus address data bus bit 8. This function is enabled when external bus is enabled.
	TIN1		Event input pin for reload timer1
33	P11	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD09		Input/output pin for external bus address data bus bit 9. This function is enabled when external bus is enabled.
	TOT1		Output pin for reload timer1
34	P12	N	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD10		Input/output pin for external bus address data bus bit 10. This function is enabled when external bus is enabled.
	SIN3		Serial data input pin for UART3
	INT11R		External interrupt request input pin for INT11
35	P13	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD11		Input/output pin for external bus address data bus bit 11. This function is enabled when external bus is enabled.
	SOT3		Serial data output pin for UART3
36	P14	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD12		Input/output pin for external bus address data bus bit 12. This function is enabled when external bus is enabled.
	SCK3		Clock input/output pin for UART3
37	P15	N	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD13		Input/output pin for external bus address data bus bit 13. This function is enabled when external bus is enabled.
38	P16	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD14		Input/output pin for external bus address data bus bit 14. This function is enabled when external bus is enabled.

(Continued)



# MB90350E Series

Pin No.	Pin name	I/O Circuit type*	Function
39	P17	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	AD15		Input/output pin for external bus address data bus bit 15. This function is enabled when external bus is enabled.
40 to 43	P20 to P23	G	General purpose I/O ports. The register can be set to select whether to use a pull-up resistor. In external bus mode, the pins are enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.
	A16 to A19		Output pins for A16 to A19 of the external address data bus. When the corresponding bit in the external address output control register (HACR) is 0, the pins are enabled as high address output pins A16 to A19.
	PPG9 (8) , PPGB (A) , PPGD (C) , PPGF (E)		Output pins for PPGs
44	P24	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. In external bus mode, the pin is enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.
	A20		Output pin for A20 of the external address data bus. When the corresponding bit in the external address output control register (HACR) is 0, the pin is enabled as high address output pin A20.
	IN0		Data sample input pin for input capture ICU0
51	P25	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. In external bus mode, the pin is enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.
	A21		Output pin for A21 of the external address data bus. When the corresponding bit in the external address output control register (HACR) is 0, the pin is enabled as high address output pin A21.
	IN1		Data sample input pin for input capture ICU1
	ADTG		Trigger input pin for A/D converter
52	P44	H	General purpose I/O port
	SDA0		Serial data I/O pin for I <sup>2</sup> C 0
	FRCK0		Input pin for the 16-bit I/O Timer 0
53	P45	H	General purpose I/O port
	SCL0		Serial clock I/O pin for I <sup>2</sup> C 0
	FRCK1		Input pin for the 16-bit I/O Timer 1

(Continued)

# MB90350E Series

Pin No.	Pin name	I/O Circuit type*	Function
54	P30	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	ALE		Address latch enable output pin. This function is enabled when external bus is enabled.
	IN4		Data sample input pin for input capture ICU4
55	P31	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
	$\overline{RD}$		Read strobe output pin for data bus. This function is enabled when external bus is enabled.
	IN5		Data sample input pin for input capture ICU5
56	P32	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the $\overline{WR/WRL}$ pin output disabled.
	$\overline{WR/WRL}$		Write strobe output pin for the data bus. This function is enabled when both the external bus and the $\overline{WR/WRL}$ pin output are enabled. $\overline{WRL}$ is used to write-strobe 8 lower bits of the data bus in 16-bit access. $\overline{WR}$ is used to write-strobe 8 bits of the data bus in 8-bit access.
	INT10R		External interrupt request input pin for INT10
57	P33	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode, in external bus 8-bit mode or with the $\overline{WRH}$ pin output disabled.
	$\overline{WRH}$		Write strobe output pin for the 8 higher bits of the data bus. This function is enabled when the external bus is enabled, when the external bus 16-bit mode is selected, and when the $\overline{WRH}$ output pin is enabled.
58	P34	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the hold function disabled.
	HRQ		Hold request input pin. This function is enabled when both the external bus and the hold function are enabled.
	OUT4		Wave form output pin for output compare OCU4
59	P35	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the hold function disabled.
	$\overline{HAK}$		Hold acknowledge output pin. This function is enabled when both the external bus and the hold function are enabled.
	OUT5		Wave form output pin for output compare OCU5
60	P36	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the external ready function disabled.
	RDY		Ready input pin. This function is enabled when both the external bus and the external ready function are enabled.
	OUT6		Wave form output pin for output compare OCU6

(Continued)

(Continued)

Pin No.	Pin name	I/O Circuit type*	Function
61	P37	G	General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the CLK output disabled.
	CLK		CLK output pin. This function is enabled when both the external bus and CLK output are enabled.
	OUT7		Wave form output pin for output compare OCU7
62, 63	P60, P61	I	General purpose I/O ports
	AN0, AN1		Analog input pins for A/D converter
64	AV <sub>cc</sub>	K	V <sub>cc</sub> power input pin for analog circuits
2	AVRH	L	Reference voltage input for the A/D converter. This power supply must be turned on or off while a voltage higher than or equal to AVRH is applied to AV <sub>cc</sub> .
1	AV <sub>ss</sub>	K	V <sub>ss</sub> power input pin for analog circuits
22, 23	MD1, MD0	C	Input pins for specifying the operating mode
21	MD2	D	Input pin for specifying the operating mode
49	V <sub>cc</sub>	—	Power (3.5 V to 5.5 V) input pin
18, 48	V <sub>ss</sub>	—	Power (0 V) input pins
50	C	K	This is the power supply stabilization capacitor pin. It should be connected to a higher than or equal to 0.1 μF ceramic capacitor.




\* : For the I/O circuit type, refer to “■ I/O CIRCUIT TYPE”.

# MB90350E Series

## ■ I/O CIRCUIT TYPE




Type	Circuit	Remarks
A		<p>Oscillation circuit High-speed oscillation feedback resistor = approx. 1 MΩ</p>
B		<p>Oscillation circuit Low-speed oscillation feedback resistor = approx. 10 MΩ</p>
C		<ul style="list-style-type: none"> <li>• MASK ROM device CMOS hysteresis input pin</li> <li>• Flash memory device CMOS input pin</li> </ul>
D		<ul style="list-style-type: none"> <li>• MASK ROM device CMOS hysteresis input pin Pull-down resistor value: approx. 50 kΩ</li> <li>• Flash memory device CMOS input pin No Pull-down</li> </ul>
E		<p>CMOS hysteresis input pin Pull-up resistor value: approx. 50 kΩ</p>

(Continued)

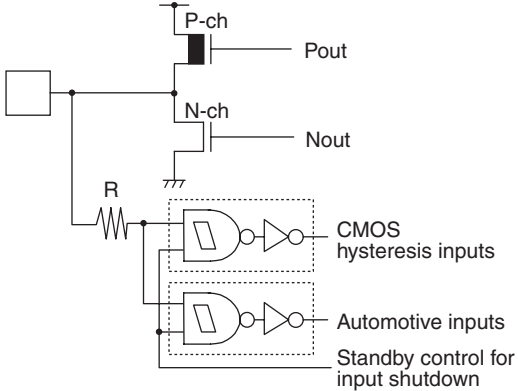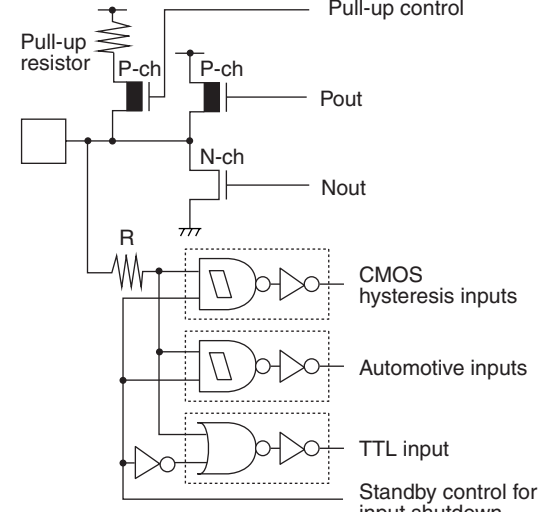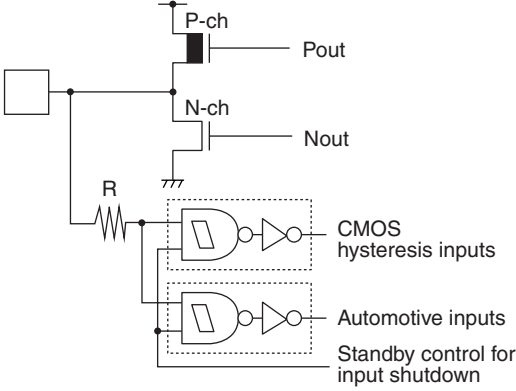Type	Circuit	Remarks
F	 <p>The diagram shows a CMOS output stage with a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch). The output is labeled Pout and Nout. A pull-up resistor R is connected to the input. The input is also connected to three input stages: CMOS hysteresis inputs, Automotive inputs, and Standby control for input shutdown.</p>	<ul style="list-style-type: none"> <li>• CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>• CMOS hysteresis inputs (With input shutdown function when is standby)</li> <li>• Automotive input (With the standby-time input shutdown function)</li> </ul>
G	 <p>The diagram shows a CMOS output stage with a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch). The output is labeled Pout and Nout. A pull-up resistor is connected to the input, with a label 'Pull-up resistor' and 'Pull-up control'. A resistor R is also connected to the input. The input is also connected to four input stages: CMOS hysteresis inputs, Automotive inputs, TTL input, and Standby control for input shutdown.</p>	<ul style="list-style-type: none"> <li>• CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>• CMOS hysteresis inputs (With the standby-time input shutdown function)</li> <li>• Automotive input (With the standby-time input shutdown function)</li> <li>• TTL input (With the standby-time input shutdown function)</li> <li>• Programmable pull-up resistor: approx. 50 k<math>\Omega</math></li> </ul>
H	 <p>The diagram shows a CMOS output stage with a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch). The output is labeled Pout and Nout. A pull-up resistor R is connected to the input. The input is also connected to three input stages: CMOS hysteresis inputs, Automotive inputs, and Standby control for input shutdown.</p>	<ul style="list-style-type: none"> <li>• CMOS level output (<math>I_{OL} = 3 \text{ mA}</math>, <math>I_{OH} = -3 \text{ mA}</math>)</li> <li>• CMOS hysteresis inputs (With the standby-time input shutdown function)</li> <li>• Automotive input (With the standby-time input shutdown function)</li> </ul>



(Continued)

# MB90350E Series

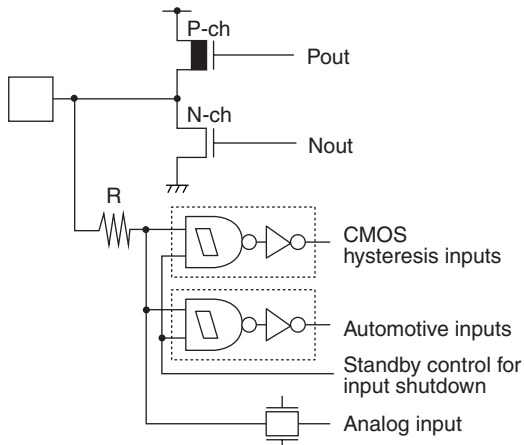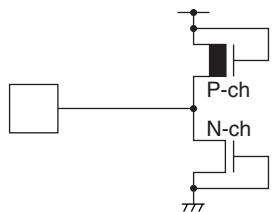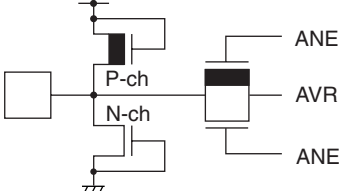Type	Circuit	Remarks
I	 <p>The diagram shows a CMOS output stage with a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch). The gates are connected to a driver circuit. A resistor R is connected to the gates. The output is labeled Pout and Nout. Below the output stage, there are three input types: CMOS hysteresis inputs (represented by two inverters with feedback), Automotive inputs (represented by two inverters with feedback and a diode), Standby control for input shutdown (represented by a diode), and Analog input (represented by a diode).</p>	<ul style="list-style-type: none"> <li>• CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>• CMOS hysteresis inputs (With the standby-time input shutdown function)</li> <li>• Automotive input (With the standby-time input shutdown function)</li> <li>• Analog input for A/D converter</li> </ul>
K	 <p>The diagram shows a protection circuit for power supply input. It consists of a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch) connected in series between the power supply and the load. The gates are connected to a driver circuit.</p>	<p>Protection circuit for power supply input</p>
L	 <p>The diagram shows a protection circuit for A/D converter reference voltage power input pin. It consists of a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch) connected in series between the power supply and the load. The gates are connected to a driver circuit. The output is labeled ANE, AVR, and ANE.</p>	<ul style="list-style-type: none"> <li>• With the protection circuit of A/D converter reference voltage power input pin</li> <li>• Flash memory devices do not have a protection circuit against <math>V_{CC}</math> for pin AVRH.</li> </ul>

(Continued)

(Continued)

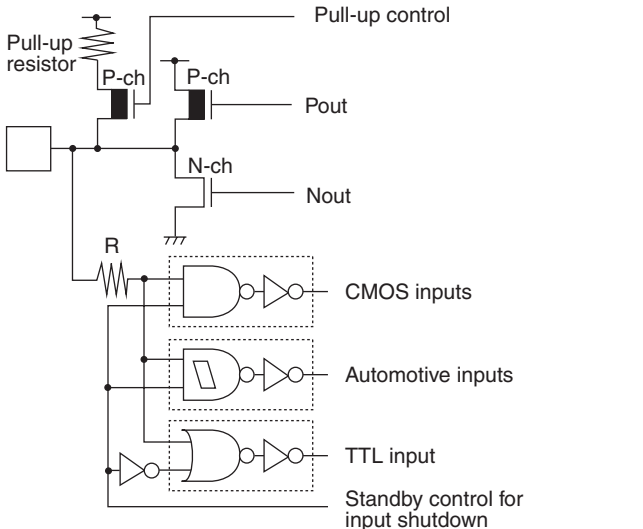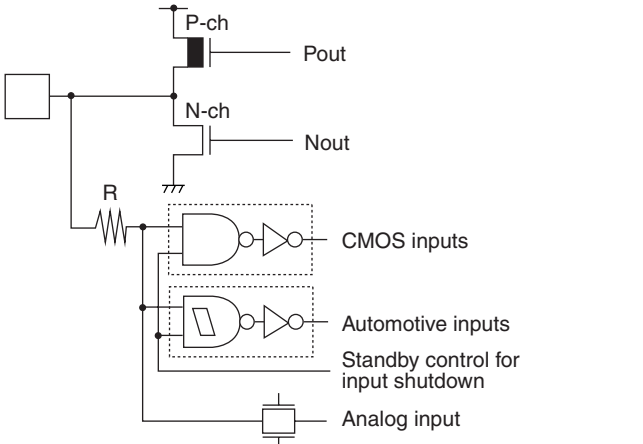Type	Circuit	Remarks
N	 <p>The diagram for Type N shows a pull-up resistor connected to a node that branches to a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch). The P-ch MOSFET is controlled by a 'Pull-up control' signal. The output of this node is labeled 'Pout'. The N-ch MOSFET is controlled by 'Nout'. A resistor 'R' is connected to the node between the pull-up resistor and the P-ch MOSFET. This node also branches to three input types: CMOS inputs, Automotive inputs, and TTL input. A 'Standby control for input shutdown' signal is connected to the CMOS inputs.</p>	<ul style="list-style-type: none"> <li>• CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>• CMOS inputs (With the standby-time input shutdown function)</li> <li>• Automotive input (With the standby-time input shutdown function)</li> <li>• TTL input (With the standby-time input shutdown function)</li> <li>• Programmable pull-up resistor: approx. <math>50 \text{ k}\Omega</math></li> </ul>
O	 <p>The diagram for Type O shows a pull-up resistor connected to a node that branches to a P-channel MOSFET (P-ch) and an N-channel MOSFET (N-ch). The output of this node is labeled 'Pout'. The N-ch MOSFET is controlled by 'Nout'. A resistor 'R' is connected to the node between the pull-up resistor and the P-ch MOSFET. This node also branches to three input types: CMOS inputs, Automotive inputs, and an Analog input. A 'Standby control for input shutdown' signal is connected to the CMOS inputs.</p>	<ul style="list-style-type: none"> <li>• CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>• CMOS inputs (With the standby-time input shutdown function)</li> <li>• Automotive input (With the standby-time input shutdown function)</li> <li>• Analog input for A/D converter</li> </ul>

# MB90350E Series

## ■ HANDLING DEVICES

### 1. Preventing latch-up

CMOS IC chips may suffer latch-up under the following conditions :

- A voltage higher than  $V_{CC}$  or lower than  $V_{SS}$  is applied to an input or output pin.
- A voltage higher than the rated voltage is applied between  $V_{CC}$  and  $V_{SS}$  pins.
- The  $AV_{CC}$  power supply is applied before the  $V_{CC}$  voltage.

Latch-up may increase the power supply current drastically, causing thermal damage to the device.

For the same reason, also be careful not to let the analog power-supply voltage ( $AV_{CC}$ ,  $AVRH$ ) exceed the digital power-supply voltage ( $V_{CC}$ ) .


### 2. Treatment of unused pins

Leaving unused input pins open may result in misbehavior or latch up and possible permanent damage of the device. Therefore they must be pulled up or pulled down through resistors. In this case those resistors should be more than 2 k $\Omega$ .

Unused I/O pins should be set to the output state and can be left open, or the input state with the above described connection.

### 3. Using external clock

To use external clock, drive the X0 pin and leave X1 pin open.

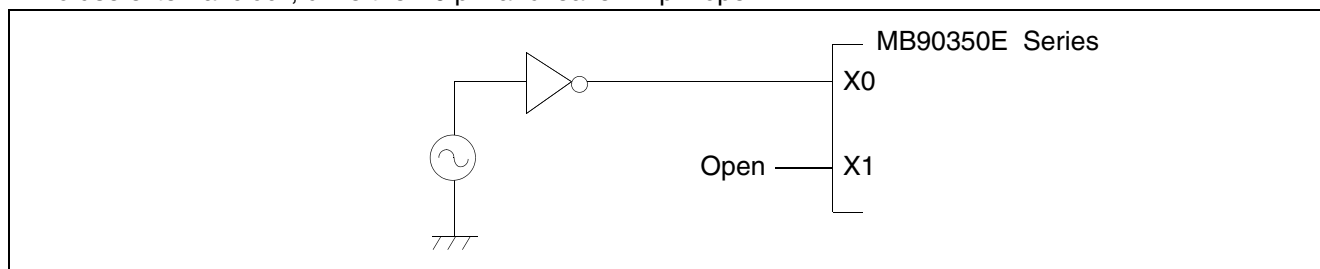

### 4. Precautions for when not using a sub clock signal

X0A and X1A are oscillation pins for sub clock. If you do not connect pins X0A and X1A to an oscillator, use pull-down handling on the X0A pin, and leave the X1A pin open.

### 5. Notes on during operation of PLL clock mode

On this microcontroller, if in case the crystal oscillator breaks off or an external reference clock input stops while the PLL clock mode is selected, a self-oscillator circuit contained in the PLL may continue its operation at its self-running frequency. However, Fujitsu will not guarantee results of operations if such failure occurs.




## 6. Treatment of Power Supply Pins ( $V_{CC}/V_{SS}$ )

- If there are multiple  $V_{CC}$  and  $V_{SS}$  pins, from the point of view of device design, pins to be of the same potential are connected inside of the device to prevent malfunction such as latch-up.

To reduce unnecessary radiation, prevent malfunctioning of the strobe signal due to the rise of ground level, and observe the standard for total output current, be sure to connect the  $V_{CC}$  and  $V_{SS}$  pins to the power supply and ground externally.

Connect  $V_{CC}$  and  $V_{SS}$  pins to the device from the current supply source at a possibly low impedance.

- As a measure against power supply noise, it is recommended to connect a capacitor of about 0.1  $\mu\text{F}$  as a bypass capacitor between  $V_{CC}$  and  $V_{SS}$  pins in the vicinity of  $V_{CC}$  and  $V_{SS}$  pins of the device.

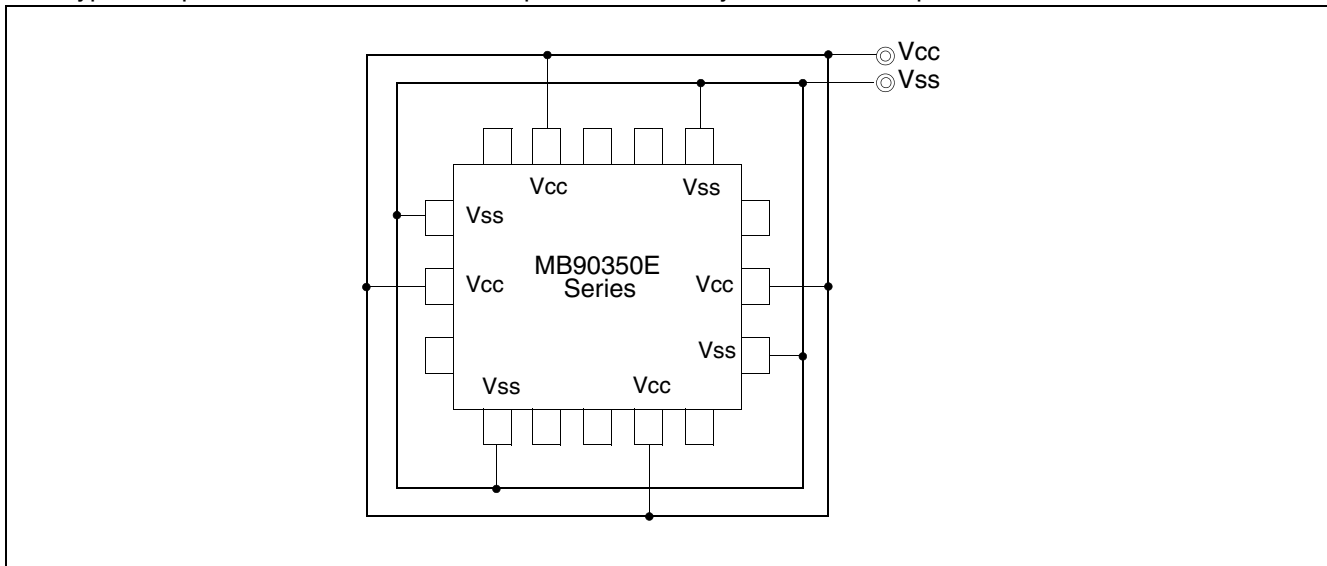

## 7. Pull-up/down resistors

The MB90350E series does not support internal pull-up/down resistors (Port 0 to Port 3: built-in pull-up resistors). Use external components where needed.

## 8. Crystal oscillator circuit

Noise around the X0/X1, or X0A/X1A pins may cause this device to operate abnormally. In the interest of stable operation it is strongly recommended that printed circuit artwork places ground bypass capacitors as close as possible to the X0/X1, X0A/X1A and crystal oscillator (or ceramic oscillator) and that oscillator lines do not cross the lines of other circuits.

Please ask each crystal maker to evaluate the oscillational characteristics of the crystal and this device.

## 9. Turning-on sequence of power supply to A/D converter and analog inputs

Make sure to turn on the A/D converter power supply ( $AV_{CC}$ ,  $AVRH$ ) and analog inputs (AN0 to AN14) after turning-on the digital power supply ( $V_{CC}$ ). Turn-off the digital power after turning off the A/D converter power supply and analog inputs. In this case, make sure that the voltage does not exceed  $AVRH$  or  $AV_{CC}$  (turning on/off the analog and digital power supplies simultaneously is acceptable).

## 10. Connection of unused pins of A/D converter if A/D converter is not used

Connect unused pins of A/D converter to  $AV_{CC} = V_{CC}$ ,  $AV_{SS} = AVRH = V_{SS}$ .

## 11. Notes on energization

To prevent the internal regulator circuit from malfunctioning, set the voltage rise time during energization at 50  $\mu\text{s}$  or more (0.2 V to 2.7 V).

# MB90350E Series

## 12. Stabilization of power supply voltage

A sudden change in the power supply voltage may cause the device to malfunction even within the specified power supply voltage  $V_{CC}$  operating range. Therefore, the power supply voltage  $V_{CC}$  should be stabilized.


For reference, the power supply voltage should be controlled so that  $V_{CC}$  ripple variations (peak-to-peak value) at commercial frequencies (50 Hz/60 Hz) fall below 10% of the standard power supply voltage  $V_{CC}$  and the coefficient of fluctuation does not exceed 0.1 V/ms at instantaneous power switching.

## 13. Initialization

In the device, there are internal registers which are initialized only by a power-on reset. To initialize these registers, turn on the power again.

## 14. Port 0 to port 3 output during power-on (External-bus mode)

As shown below, when power is turned on in external-bus mode, there is a possibility that output signal of Port 0 to Port 3 might be unstable regardless of reset inputs.

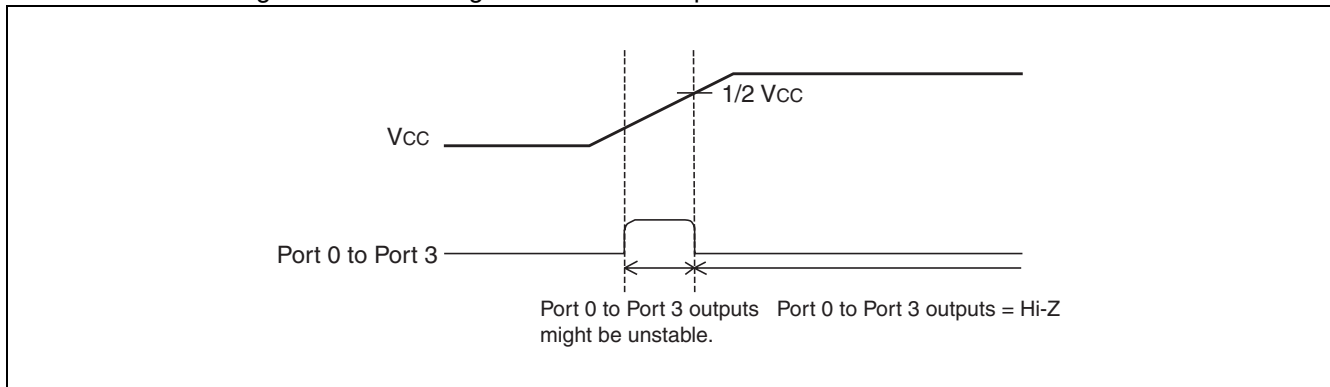

## 15. Setting using CAN function

To use CAN function, please set "1" to DIRECT bit of CAN direct mode register (CDMR).

If DIRECT bit is set to "0" (initial value), wait states will be performed when accessing CAN registers.

Note : Please refer to section "23.12 CAN Direct Mode Register" in Hardware Manual of MB90350E series for detail of CAN direct mode register.

## 16. Flash security function

The security byte is located in the area of the Flash memory. If protection code 01<sub>H</sub> is written in the security byte, the Flash memory is in the protected state by security.

Therefore please do not write 01<sub>H</sub> in this address if you do not use the security function.

Please refer to following table for the address of the security byte.

Product name	Flash memory size	Address for security bit
MB90F352E(S) MB90F352TE(S) MB90F357E(S) MB90F357TE(S)	Embedded 1 Mbit Flash memory	FE0001 <sub>H</sub>

## 17. Operation with $T_A = +105\text{ }^\circ\text{C}$ or more

If used exceeding  $T_A = +105\text{ }^\circ\text{C}$ , please contact Fujitsu sales representatives for reliability limitations.

## 18. Low voltage/CPU operation reset circuit

The low voltage detection reset circuit is a function that monitors power supply voltage in order to detect when a voltage drops below a given voltage level. When a low voltage condition is detected, an internal reset signal is generated.

The CPU operation detection reset circuit is a 20-bit counter that uses oscillation as a count clock and generates an internal reset signal if not cleared within a given time after startup.

### (1) Low voltage detection reset circuit

Detection voltage
4.0 V $\pm$ 0.3 V

When a low voltage condition is detected, the low voltage detection flag (LVRC : LVRF) is set to "1" and an internal reset signal is output.

Because the low voltage detection reset circuit continues to operate even in stop mode, detection of a low voltage condition generates an internal reset and releases stop mode.

During an internal RAM write cycle, low voltage reset is generated after the completion of writing. During the output of this internal reset, the reset output from the low voltage detection reset circuit is suppressed.

### (2) CPU operation detection reset circuit

The CPU operation detection reset circuit is a counter that prevents program runaway. The counter starts automatically after a power-on reset, and must be continually and regularly cleared within a given time. If the given time interval elapses and the counter has not been cleared, a cause such as infinite program looping is assumed and an internal reset signal is generated. The internal reset generated from the CPU operation detection circuit has a width of 5 machine cycles.

Interval time
$2^{20}/F_c$ (approx. 262 ms*)

\* : This value assumes the interval time at an oscillation clock frequency of 4 MHz.

During recovery from standby mode, the detection period is the maximum interval plus 20  $\mu$ s.

This circuit does not operate in modes where CPU operation is stopped.

The CPU operation detection reset circuit counter is cleared under any of the following conditions.

- "0" writing to CL bit of LVRC register
- Internal reset
- Main oscillation clock stop
- Transit to sleep mode
- Transit to timebase timer mode and watch mode


## 19. Internal CR oscillation circuit

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Oscillation frequency	$f_{RC}$	50	100	200	kHz
Oscillation stabilization wait time	tstab	—	—	100	$\mu$ s

# MB90350E Series


## ■ BLOCK DIAGRAMS

• MB90V340E-101/102

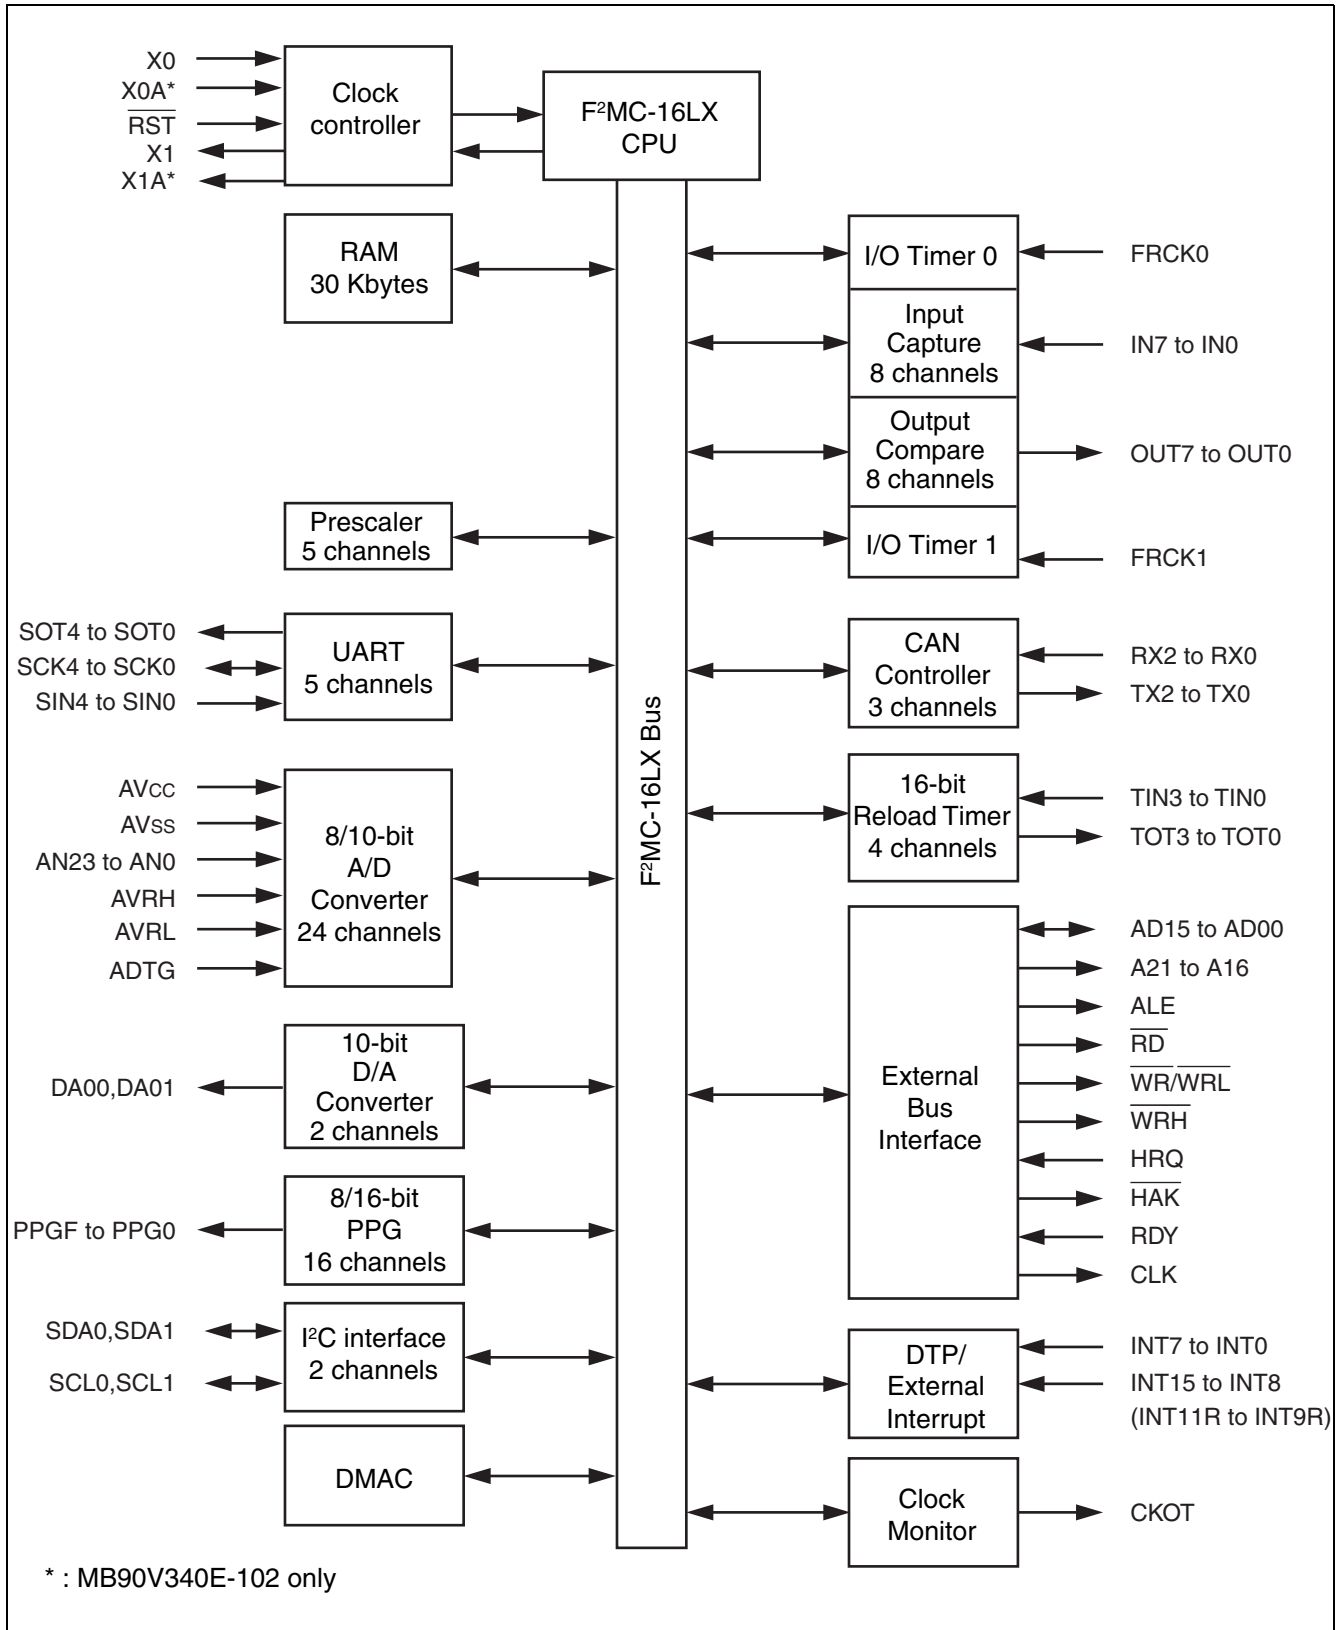


# MB90350E Series

• MB90V340E-103/104

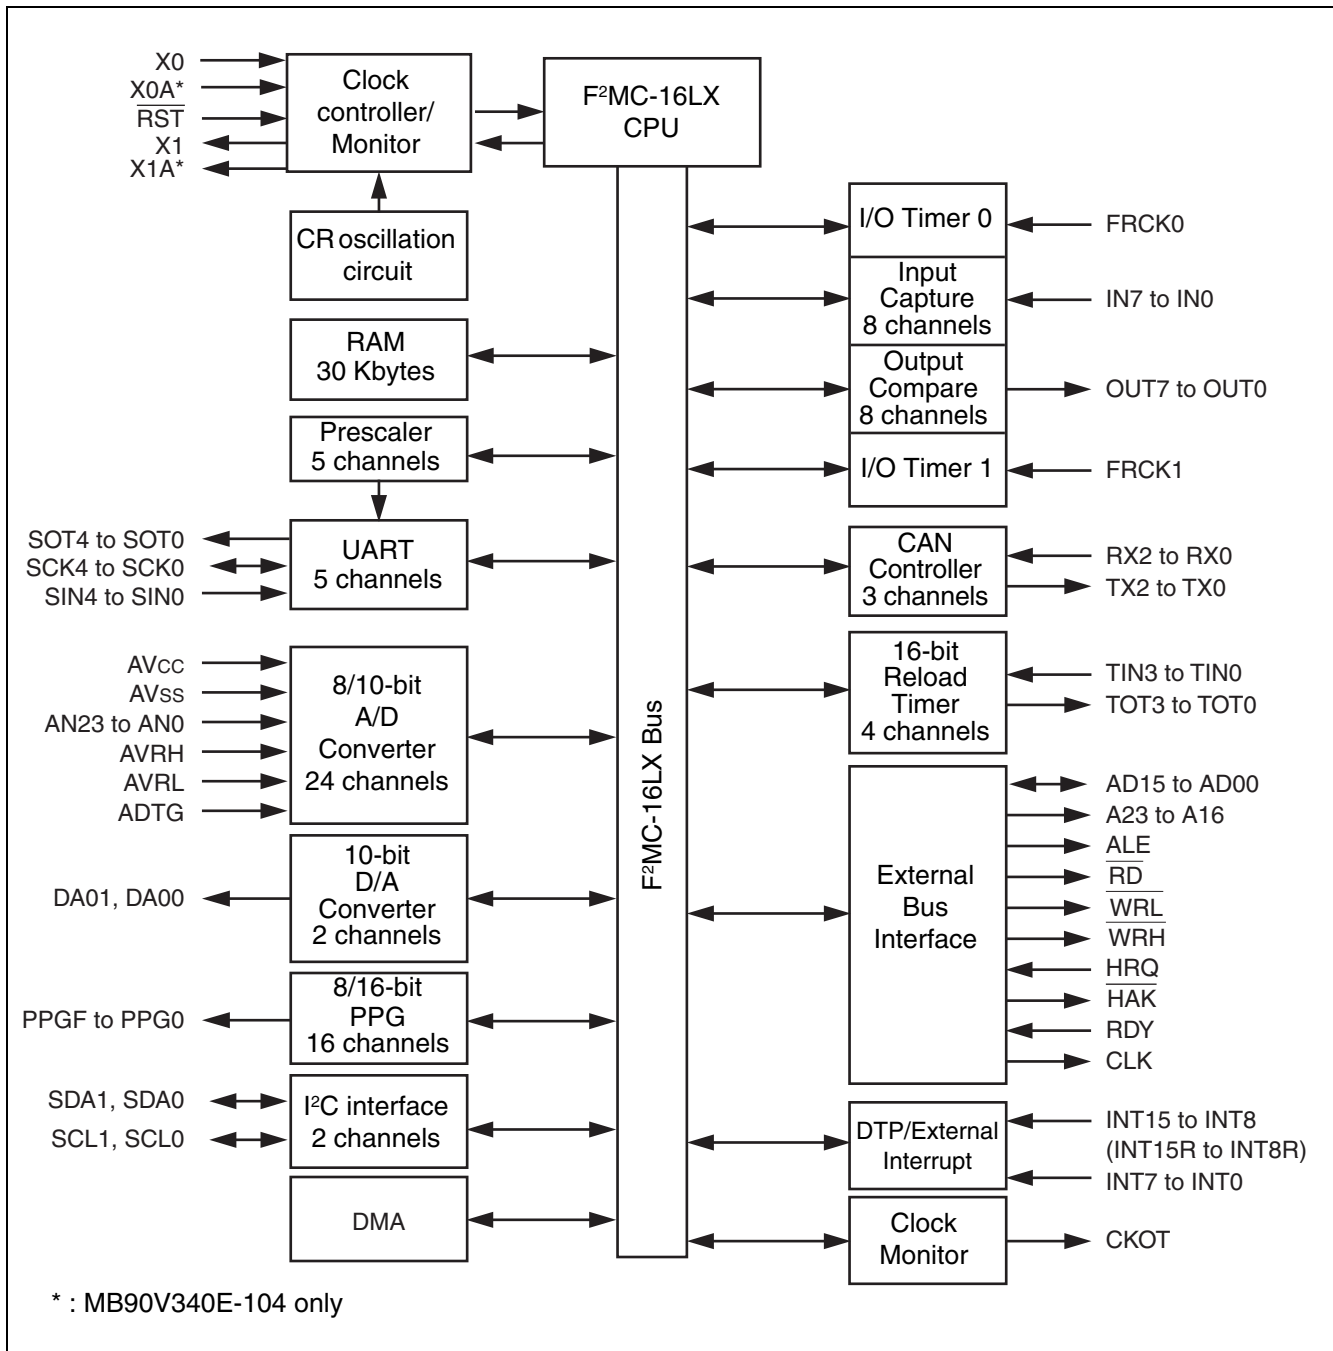


# MB90350E Series

- MB90F352E (S) , MB90F352TE (S) , MB90F351E (S) , MB90F351TE (S) , MB90352E (S) , MB90352TE (S) , MB90351E (S) , MB90351TE (S)

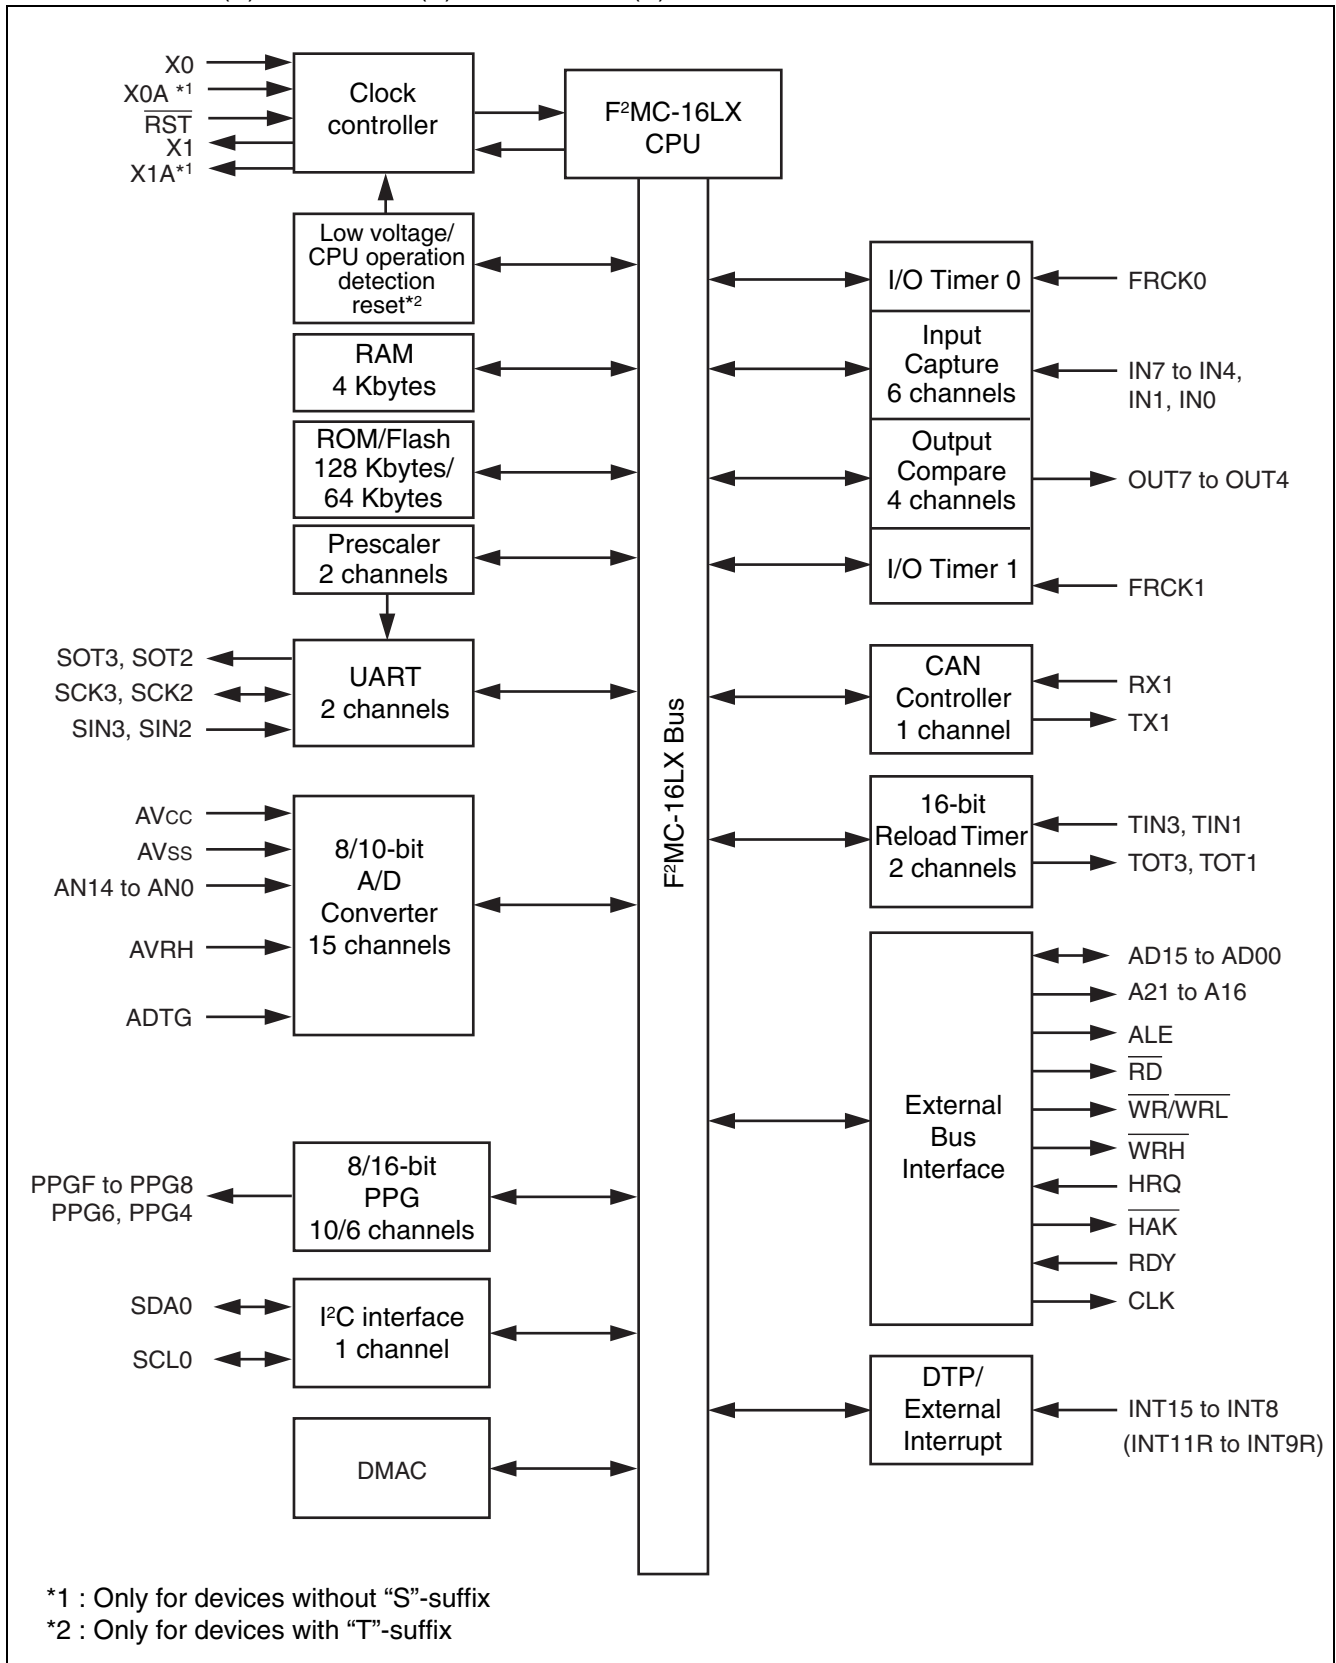


# MB90350E Series

- MB90F357E (S) , MB90F357TE (S) , MB90F356E (S) , MB90F356TE (S) , MB90357E (S) , MB90357TE (S) , MB90356E (S) , MB90356TE (S)

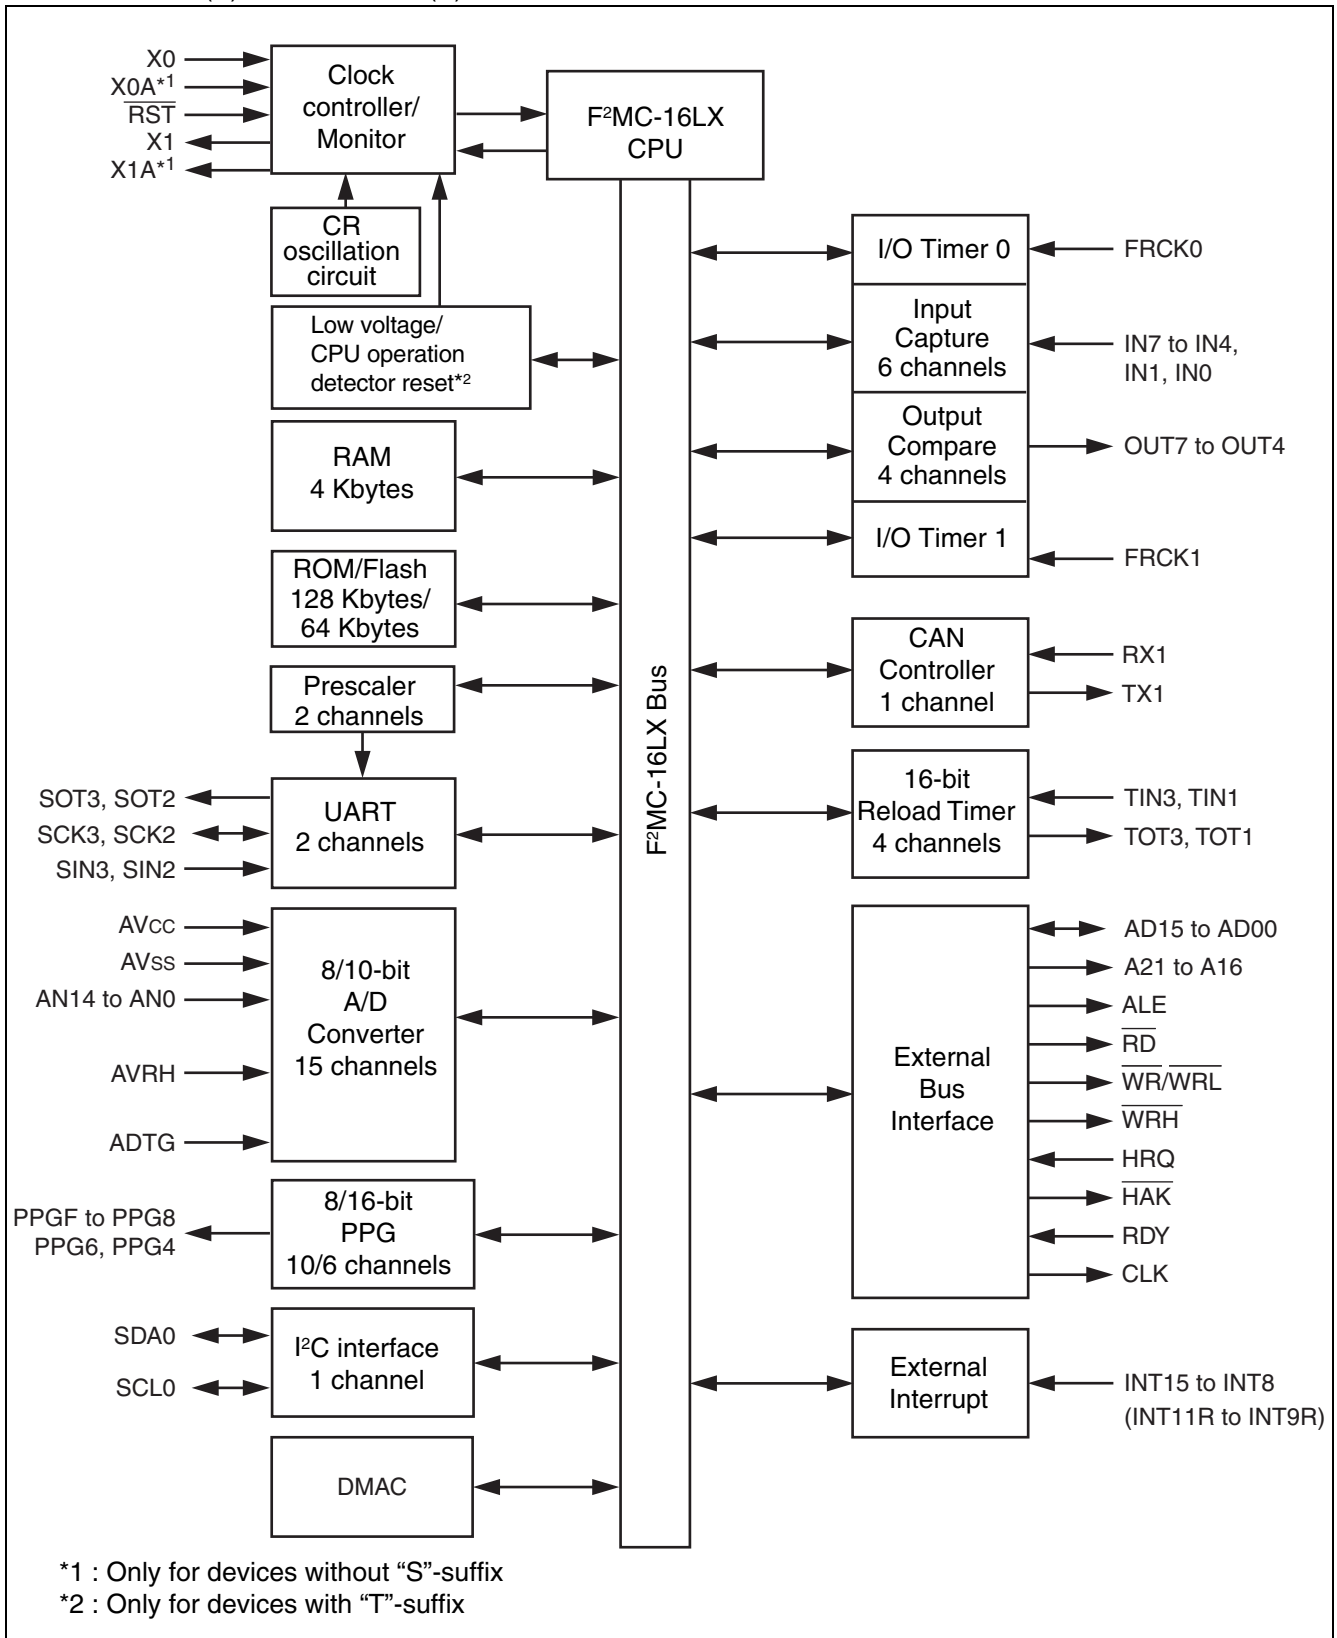

# MB90350E Series

## MEMORY MAP

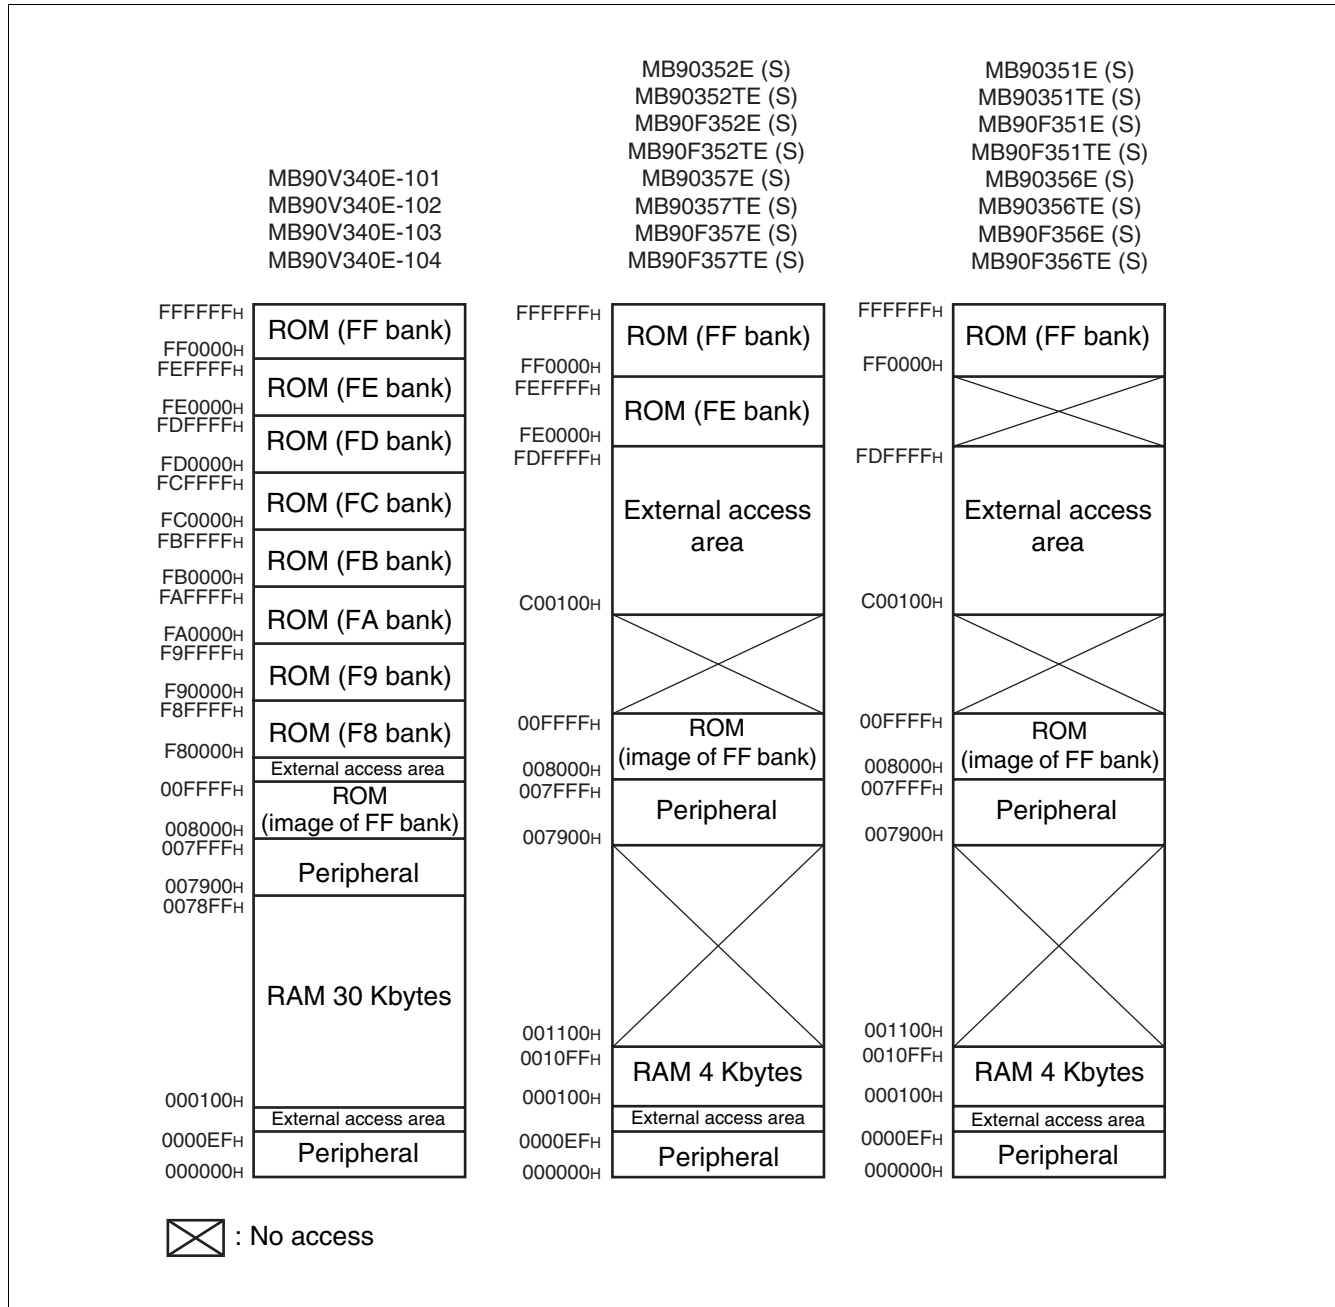

Note : The high-order portion of bank 00 gives the image of the FF bank ROM to make the small model of the C compiler effective. Since the low-order 16 bits are the same, the table in ROM can be referenced without using the far specification in the pointer declaration.

For example, an attempt to access 00C000<sub>H</sub> practically accesses the value at FFC000<sub>H</sub> in ROM.

The ROM area in bank FF exceeds 32 Kbytes, and its entire image cannot be shown in bank 00.

The image between FF8000<sub>H</sub> and FFFFF<sub>H</sub> is visible in bank 00, while the image between FF0000<sub>H</sub> and FF7FFF<sub>H</sub> is visible only in bank FF.



## ■ I/O MAP

Address	Register	Abbreviation	Access	Resource name	Initial value
000000 <sub>H</sub>	Port 0 Data Register	PDR0	R/W	Port 0	XXXXXXXX <sub>B</sub>
000001 <sub>H</sub>	Port 1 Data Register	PDR1	R/W	Port 1	XXXXXXXX <sub>B</sub>
000002 <sub>H</sub>	Port 2 Data Register	PDR2	R/W	Port 2	XXXXXXXX <sub>B</sub>
000003 <sub>H</sub>	Port 3 Data Register	PDR3	R/W	Port 3	XXXXXXXX <sub>B</sub>
000004 <sub>H</sub>	Port 4 Data Register	PDR4	R/W	Port 4	XXXXXXXX <sub>B</sub>
000005 <sub>H</sub>	Port 5 Data Register	PDR5	R/W	Port 5	XXXXXXXX <sub>B</sub>
000006 <sub>H</sub>	Port 6 Data Register	PDR6	R/W	Port 6	XXXXXXXX <sub>B</sub>
000007 <sub>H</sub> to 00000A <sub>H</sub>	Reserved				
00000B <sub>H</sub>	Port 5 Analog Input Enable Register	ADER5	R/W	Port 5, A/D	11111111 <sub>B</sub>
00000C <sub>H</sub>	Port 6 Analog Input Enable Register	ADER6	R/W	Port 6, A/D	11111111 <sub>B</sub>
00000D <sub>H</sub>	Reserved				
00000E <sub>H</sub>	Input Level Select Register 0	ILSR0	R/W	Ports	00000000 <sub>B</sub>
00000F <sub>H</sub>	Input Level Select Register 1	ILSR1	R/W	Ports	00000000 <sub>B</sub>
000010 <sub>H</sub>	Port 0 Direction Register	DDR0	R/W	Port 0	00000000 <sub>B</sub>
000011 <sub>H</sub>	Port 1 Direction Register	DDR1	R/W	Port 1	00000000 <sub>B</sub>
000012 <sub>H</sub>	Port 2 Direction Register	DDR2	R/W	Port 2	XX000000 <sub>B</sub>
000013 <sub>H</sub>	Port 3 Direction Register	DDR3	R/W	Port 3	00000000 <sub>B</sub>
000014 <sub>H</sub>	Port 4 Direction Register	DDR4	R/W	Port 4	XX000000 <sub>B</sub>
000015 <sub>H</sub>	Port 5 Direction Register	DDR5	R/W	Port 5	X0000000 <sub>B</sub>
000016 <sub>H</sub>	Port 6 Direction Register	DDR6	R/W	Port 6	00000000 <sub>B</sub>
000017 <sub>H</sub> to 000019 <sub>H</sub>	Reserved				
00001A <sub>H</sub>	SIN input Level Setting Register	DDRA	W	UART2, UART3	X00XXXXX <sub>B</sub>
00001B <sub>H</sub>	Reserved				
00001C <sub>H</sub>	Port 0 Pull-up Control Register	PUCR0	R/W	Port 0	00000000 <sub>B</sub>
00001D <sub>H</sub>	Port 1 Pull-up Control Register	PUCR1	R/W	Port 1	00000000 <sub>B</sub>
00001E <sub>H</sub>	Port 2 Pull-up Control Register	PUCR2	R/W	Port 2	00000000 <sub>B</sub>
00001F <sub>H</sub>	Port 3 Pull-up Control Register	PUCR3	R/W	Port 3	00000000 <sub>B</sub>
000020 <sub>H</sub> to 000037 <sub>H</sub>	Reserved				

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Resource name	Initial value
000038 <sub>H</sub>	PPG 4 Operation Mode Control Register	PPGC4	W, R/W	16-bit Programmable Pulse Generator 4/5	0X000XX1 <sub>B</sub>
000039 <sub>H</sub>	PPG 5 Operation Mode Control Register	PPGC5	W, R/W		0X000001 <sub>B</sub>
00003A <sub>H</sub>	PPG 4/5 Count Clock Select Register	PPG45	R/W		000000X0 <sub>B</sub>
00003B <sub>H</sub>	Address Detect Control Register 1	PACSR1	R/W	Address Match Detection 1	00000000 <sub>B</sub>
00003C <sub>H</sub>	PPG 6 Operation Mode Control Register	PPGC6	W, R/W	16-bit Programmable Pulse Generator 6/7	0X000XX1 <sub>B</sub>
00003D <sub>H</sub>	PPG 7 Operation Mode Control Register	PPGC7	W, R/W		0X000001 <sub>B</sub>
00003E <sub>H</sub>	PPG 6/7 Count Clock Select Register	PPG67	R/W		000000X0 <sub>B</sub>
00003F <sub>H</sub>	Reserved				
000040 <sub>H</sub>	PPG 8 Operation Mode Control Register	PPGC8	W, R/W	16-bit Programmable Pulse Generator 8/9	0X000XX1 <sub>B</sub>
000041 <sub>H</sub>	PPG 9 Operation Mode Control Register	PPGC9	W, R/W		0X000001 <sub>B</sub>
000042 <sub>H</sub>	PPG 8/9 Count Clock Select Register	PPG89	R/W		000000X0 <sub>B</sub>
000043 <sub>H</sub>	Reserved				
000044 <sub>H</sub>	PPG A Operation Mode Control Register	PPGCA	W, R/W	16-bit Programmable Pulse Generator A/B	0X000XX1 <sub>B</sub>
000045 <sub>H</sub>	PPG B Operation Mode Control Register	PPGCB	W, R/W		0X000001 <sub>B</sub>
000046 <sub>H</sub>	PPG A/B Count Clock Select Register	PPGAB	R/W		000000X0 <sub>B</sub>
000047 <sub>H</sub>	Reserved				
000048 <sub>H</sub>	PPG C Operation Mode Control Register	PPGCC	W,R/W	16-bit Programmable Pulse Generator C/D	0X000XX1 <sub>B</sub>
000049 <sub>H</sub>	PPG D Operation Mode Control Register	PPGCD	W,R/W		0X000001 <sub>B</sub>
00004A <sub>H</sub>	PPG C/D Count Clock Select Register	PPGCD	R/W		000000X0 <sub>B</sub>
00004B <sub>H</sub>	Reserved				
00004C <sub>H</sub>	PPG E Operation Mode Control Register	PPGCE	W,R/W	16-bit Programmable Pulse Generator E/F	0X000XX1 <sub>B</sub>
00004D <sub>H</sub>	PPG F Operation Mode Control Register	PPGCF	W,R/W		0X000001 <sub>B</sub>
00004E <sub>H</sub>	PPG E/F Count Clock Select Register	PPGEF	R/W		000000X0 <sub>B</sub>
00004F <sub>H</sub>	Reserved				
000050 <sub>H</sub>	Input Capture Control Status Register 0/1	ICS01	R/W	Input Capture 0/1	00000000 <sub>B</sub>
000051 <sub>H</sub>	Input Capture Edge Register 0/1	ICE01	R/W, R		XXX0X0XX <sub>B</sub>
000052 <sub>H</sub> , 000053 <sub>H</sub>	Reserved				
000054 <sub>H</sub>	Input Capture Control Status Register 4/5	ICS45	R/W	Input Capture 4/5	00000000 <sub>B</sub>
000055 <sub>H</sub>	Input Capture Edge Register 4/5	ICE45	R		XXXXXXXX <sub>B</sub>
000056 <sub>H</sub>	Input Capture Control Status Register 6/7	ICS67	R/W	Input Capture 6/7	00000000 <sub>B</sub>
000057 <sub>H</sub>	Input Capture Edge Register 6/7	ICE67	R/W, R		XXX000XX <sub>B</sub>

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Resource name	Initial value
000058 <sub>H</sub> to 00005B <sub>H</sub>	Reserved				
00005C <sub>H</sub>	Output Compare Control Status Register 4	OCS4	R/W	Output Compare 4/5	0000XX00 <sub>B</sub>
00005D <sub>H</sub>	Output Compare Control Status Register 5	OCS5	R/W		0XX00000 <sub>B</sub>
00005E <sub>H</sub>	Output Compare Control Status Register 6	OCS6	R/W	Output Compare 6/7	0000XX00 <sub>B</sub>
00005F <sub>H</sub>	Output Compare Control Status Register 7	OCS7	R/W		0XX00000 <sub>B</sub>
000060 <sub>H</sub>	Timer Control Status Register 0	TMCSR0	R/W	16-bit Reload Timer 0	00000000 <sub>B</sub>
000061 <sub>H</sub>	Timer Control Status Register 0	TMCSR0	R/W		XXXX0000 <sub>B</sub>
000062 <sub>H</sub>	Timer Control Status Register 1	TMCSR1	R/W	16-bit Reload Timer 1	00000000 <sub>B</sub>
000063 <sub>H</sub>	Timer Control Status Register 1	TMCSR1	R/W		XXXX0000 <sub>B</sub>
000064 <sub>H</sub>	Timer Control Status Register 2	TMCSR2	R/W	16-bit Reload Timer 2	00000000 <sub>B</sub>
000065 <sub>H</sub>	Timer Control Status Register 2	TMCSR2	R/W		XXXX0000 <sub>B</sub>
000066 <sub>H</sub>	Timer Control Status Register 3	TMCSR3	R/W	16-bit Reload Timer 3	00000000 <sub>B</sub>
000067 <sub>H</sub>	Timer Control Status Register 3	TMCSR3	R/W		XXXX0000 <sub>B</sub>
000068 <sub>H</sub>	A/D Control Status Register 0	ADCS0	R/W	A/D Converter	000XXXX0 <sub>B</sub>
000069 <sub>H</sub>	A/D Control Status Register 1	ADCS1	R/W		0000000X <sub>B</sub>
00006A <sub>H</sub>	A/D Data Register 0	ADCR0	R		00000000 <sub>B</sub>
00006B <sub>H</sub>	A/D Data Register 1	ADCR1	R		XXXXXX00 <sub>B</sub>
00006C <sub>H</sub>	ADC Setting Register 0	ADSR0	R/W		00000000 <sub>B</sub>
00006D <sub>H</sub>	ADC Setting Register 1	ADSR1	R/W		00000000 <sub>B</sub>
00006E <sub>H</sub>	Low Voltage/CPU Operation Detection Reset Control Register	LVRC	R/W, W	Low Voltage/CPU Operation Detection Reset	00111000 <sub>B</sub>
00006F <sub>H</sub>	ROM Mirror Function Select Register	ROMM	W	ROM Mirror	XXXXXXXX1 <sub>B</sub>
000070 <sub>H</sub> to 00007F <sub>H</sub>	Reserved				
000080 <sub>H</sub> to 00008F <sub>H</sub>	Reserved for CAN controller 1. Refer to “■ CAN CONTROLLERS”				
000090 <sub>H</sub> to 00009A <sub>H</sub>	Reserved				

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Resource name	Initial value
00009B <sub>H</sub>	DMA Descriptor Channel Specification Register	DCSR	R/W	DMA	00000000 <sub>B</sub>
00009C <sub>H</sub>	DMA Status Register L Register	DSRL	R/W		00000000 <sub>B</sub>
00009D <sub>H</sub>	DMA Status Register H Register	DSRH	R/W		00000000 <sub>B</sub>
00009E <sub>H</sub>	Address Detect Control Register 0	PACSR0	R/W	Address Match Detection 0	00000000 <sub>B</sub>
00009F <sub>H</sub>	Delayed Interrupt/Release Register	DIRR	R/W	Delayed Interrupt	XXXXXXXX0 <sub>B</sub>
0000A0 <sub>H</sub>	Low-power Consumption Mode Control Register	LPMCR	W,R/W	Low Power Consumption Control Circuit	00011000 <sub>B</sub>
0000A1 <sub>H</sub>	Clock Selection Register	CKSCR	R,R/W	Low Power Consumption Control Circuit	11111100 <sub>B</sub>
0000A2 <sub>H</sub> , 0000A3 <sub>H</sub>	Reserved				
0000A4 <sub>H</sub>	DMA Stop Status Register	DSSR	R/W	DMA	00000000 <sub>B</sub>
0000A5 <sub>H</sub>	Automatic Ready Function Selection Register	ARSR	W	External Memory Access	0011XX00 <sub>B</sub>
0000A6 <sub>H</sub>	External Address Output Control Register	HACR	W		00000000 <sub>B</sub>
0000A7 <sub>H</sub>	Bus Control Signal Selection Register	ECSR	W		0000000X <sub>B</sub>
0000A8 <sub>H</sub>	Watchdog Control Register	WDTC	R,W	Watchdog Timer	XXXXX111 <sub>B</sub>
0000A9 <sub>H</sub>	Timebase Timer Control Register	TBTC	W,R/W	Timebase timer	1XX00100 <sub>B</sub>
0000AA <sub>H</sub>	Watch Timer Control Register	WTC	R,R/W	Watch Timer	1X001000 <sub>B</sub>
0000AB <sub>H</sub>	Reserved				
0000AC <sub>H</sub>	DMA Enable Register L Register	DERL	R/W	DMA	00000000 <sub>B</sub>
0000AD <sub>H</sub>	DMA Enable Register H Register	DERH	R/W		00000000 <sub>B</sub>
0000AE <sub>H</sub>	Flash Control Status Register (Flash Devices only. Otherwise reserved)	FMCS	R,R/W	Flash memory	000X0000 <sub>B</sub>
0000AF <sub>H</sub>	Reserved				
0000B0 <sub>H</sub>	Interrupt Control Register 00	ICR00	W,R/W	Interrupt Control	00000111 <sub>B</sub>
0000B1 <sub>H</sub>	Interrupt Control Register 01	ICR01	W,R/W		00000111 <sub>B</sub>
0000B2 <sub>H</sub>	Interrupt Control Register 02	ICR02	W,R/W		00000111 <sub>B</sub>
0000B3 <sub>H</sub>	Interrupt Control Register 03	ICR03	W,R/W		00000111 <sub>B</sub>
0000B4 <sub>H</sub>	Interrupt Control Register 04	ICR04	W,R/W		00000111 <sub>B</sub>
0000B5 <sub>H</sub>	Interrupt Control Register 05	ICR05	W,R/W		00000111 <sub>B</sub>
0000B6 <sub>H</sub>	Interrupt Control Register 06	ICR06	W,R/W		00000111 <sub>B</sub>
0000B7 <sub>H</sub>	Interrupt Control Register 07	ICR07	W,R/W		00000111 <sub>B</sub>
0000B8 <sub>H</sub>	Interrupt Control Register 08	ICR08	W,R/W		00000111 <sub>B</sub>

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Resource name	Initial value
0000B9 <sub>H</sub>	Interrupt Control Register 09	ICR09	W,R/W	Interrupt Control	00000111 <sub>B</sub>
0000BA <sub>H</sub>	Interrupt Control Register 10	ICR10	W,R/W		00000111 <sub>B</sub>
0000BB <sub>H</sub>	Interrupt Control Register 11	ICR11	W,R/W		00000111 <sub>B</sub>
0000BC <sub>H</sub>	Interrupt Control Register 12	ICR12	W,R/W		00000111 <sub>B</sub>
0000BD <sub>H</sub>	Interrupt Control Register 13	ICR13	W,R/W		00000111 <sub>B</sub>
0000BE <sub>H</sub>	Interrupt Control Register 14	ICR14	W,R/W		00000111 <sub>B</sub>
0000BF <sub>H</sub>	Interrupt Control Register 15	ICR15	W,R/W		00000111 <sub>B</sub>
0000C0 <sub>H</sub> to 0000C9 <sub>H</sub>	Reserved				
0000CA <sub>H</sub>	External Interrupt Enable Register 1	ENIR1	R/W	External Interrupt 1	00000000 <sub>B</sub>
0000CB <sub>H</sub>	External Interrupt Source Register 1	EIRR1	R/W		XXXXXXXX <sub>B</sub>
0000CC <sub>H</sub>	External Interrupt Level Register 1	ELVR1	R/W		00000000 <sub>B</sub>
0000CD <sub>H</sub>	External Interrupt Level Register 1	ELVR1	R/W		00000000 <sub>B</sub>
0000CE <sub>H</sub>	External Interrupt Source Select Register	EISSR	R/W		00000000 <sub>B</sub>
0000CF <sub>H</sub>	PLL/Sub clock Control register	PSCCR	W	PLL	XXXX0000 <sub>B</sub>
0000D0 <sub>H</sub>	DMA Buffer Address Pointer L Register	BAPL	R/W	DMA	XXXXXXXX <sub>B</sub>
0000D1 <sub>H</sub>	DMA Buffer Address Pointer M Register	BAPM	R/W		XXXXXXXX <sub>B</sub>
0000D2 <sub>H</sub>	DMA Buffer Address Pointer H Register	BAPH	R/W		XXXXXXXX <sub>B</sub>
0000D3 <sub>H</sub>	DMA Control Register	DMACS	R/W		XXXXXXXX <sub>B</sub>
0000D4 <sub>H</sub>	I/O Register Address Pointer L Register	IOAL	R/W		XXXXXXXX <sub>B</sub>
0000D5 <sub>H</sub>	I/O Register Address Pointer H Register	IOAH	R/W		XXXXXXXX <sub>B</sub>
0000D6 <sub>H</sub>	Data Counter L Register	DCTL	R/W		XXXXXXXX <sub>B</sub>
0000D7 <sub>H</sub>	Data Counter H Register	DCTH	R/W		XXXXXXXX <sub>B</sub>
0000D8 <sub>H</sub>	Serial Mode Register 2	SMR2	W,R/W	UART2	00000000 <sub>B</sub>
0000D9 <sub>H</sub>	Serial Control Register 2	SCR2	W,R/W		00000000 <sub>B</sub>
0000DA <sub>H</sub>	Reception/Transmission Data Register 2	RDR2/TDR2	R/W		00000000 <sub>B</sub>
0000DB <sub>H</sub>	Serial Status Register 2	SSR2	R,R/W		00001000 <sub>B</sub>
0000DC <sub>H</sub>	Extended Communication Control Register 2	ECCR2	R,W, R/W		000000XX <sub>B</sub>
0000DD <sub>H</sub>	Extended Status/Control Register 2	ESCR2	R/W		00000100 <sub>B</sub>
0000DE <sub>H</sub>	Baud Rate Generator Register 20	BGR20	R/W		00000000 <sub>B</sub>

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Resource name	Initial value
0000DF <sub>H</sub>	Baud Rate Generator Register 21	BGR21	R/W	UART2	00000000 <sub>B</sub>
0000E0 <sub>H</sub> to 0000EF <sub>H</sub>	Reserved				
0000F0 <sub>H</sub> to 0000FF <sub>H</sub>	External area				
007900 <sub>H</sub> to 007907 <sub>H</sub>	Reserved				
007908 <sub>H</sub>	Reload Register L4	PRL4	R/W	16-bit Programmable Pulse Generator 4/5	XXXXXXXX <sub>B</sub>
007909 <sub>H</sub>	Reload Register H4	PRLH4	R/W		XXXXXXXX <sub>B</sub>
00790A <sub>H</sub>	Reload Register L5	PRL5	R/W		XXXXXXXX <sub>B</sub>
00790B <sub>H</sub>	Reload Register H5	PRLH5	R/W		XXXXXXXX <sub>B</sub>
00790C <sub>H</sub>	Reload Register L6	PRL6	R/W	16-bit Programmable Pulse Generator 6/7	XXXXXXXX <sub>B</sub>
00790D <sub>H</sub>	Reload Register H6	PRLH6	R/W		XXXXXXXX <sub>B</sub>
00790E <sub>H</sub>	Reload Register L7	PRL7	R/W		XXXXXXXX <sub>B</sub>
00790F <sub>H</sub>	Reload Register H7	PRLH7	R/W		XXXXXXXX <sub>B</sub>
007910 <sub>H</sub>	Reload Register L8	PRL8	R/W	16-bit Programmable Pulse Generator 8/9	XXXXXXXX <sub>B</sub>
007911 <sub>H</sub>	Reload Register H8	PRLH8	R/W		XXXXXXXX <sub>B</sub>
007912 <sub>H</sub>	Reload Register L9	PRL9	R/W		XXXXXXXX <sub>B</sub>
007913 <sub>H</sub>	Reload Register H9	PRLH9	R/W		XXXXXXXX <sub>B</sub>
007914 <sub>H</sub>	Reload Register LA	PRLA	R/W	16-bit Programmable Pulse Generator A/B	XXXXXXXX <sub>B</sub>
007915 <sub>H</sub>	Reload Register HA	PRLHA	R/W		XXXXXXXX <sub>B</sub>
007916 <sub>H</sub>	Reload Register LB	PRLB	R/W		XXXXXXXX <sub>B</sub>
007917 <sub>H</sub>	Reload Register HB	PRLHB	R/W		XXXXXXXX <sub>B</sub>
007918 <sub>H</sub>	Reload Register LC	PRLC	R/W	16-bit Programmable Pulse Generator C/D	XXXXXXXX <sub>B</sub>
007919 <sub>H</sub>	Reload Register HC	PRLHC	R/W		XXXXXXXX <sub>B</sub>
00791A <sub>H</sub>	Reload Register LD	PRLD	R/W		XXXXXXXX <sub>B</sub>
00791B <sub>H</sub>	Reload Register HD	PRLHD	R/W		XXXXXXXX <sub>B</sub>
00791C <sub>H</sub>	Reload Register LE	PRLLE	R/W	16-bit Programmable Pulse Generator E/F	XXXXXXXX <sub>B</sub>
00791D <sub>H</sub>	Reload Register HE	PRLHE	R/W		XXXXXXXX <sub>B</sub>
00791E <sub>H</sub>	Reload Register LF	PRLLF	R/W		XXXXXXXX <sub>B</sub>
00791F <sub>H</sub>	Reload Register HF	PRLHF	R/W		XXXXXXXX <sub>B</sub>
007920 <sub>H</sub>	Input Capture Register 0	IPCP0	R	Input Capture 0/1	XXXXXXXX <sub>B</sub>
007921 <sub>H</sub>	Input Capture Register 0	IPCP0	R		XXXXXXXX <sub>B</sub>
007922 <sub>H</sub>	Input Capture Register 1	IPCP1	R		XXXXXXXX <sub>B</sub>
007923 <sub>H</sub>	Input Capture Register 1	IPCP1	R		XXXXXXXX <sub>B</sub>

(Continued)

# MB90350E Series

Address	Register	Abbrevia- tion	Access	Resource name	Initial value
007924H to 007927H	Reserved				
007928H	Input Capture Register 4	IPCP4	R	Input Capture 4/5	XXXXXXXXXB
007929H	Input Capture Register 4	IPCP4	R		XXXXXXXXXB
00792AH	Input Capture Register 5	IPCP5	R		XXXXXXXXXB
00792BH	Input Capture Register 5	IPCP5	R		XXXXXXXXXB
00792CH	Input Capture Register 6	IPCP6	R	Input Capture 6/7	XXXXXXXXXB
00792DH	Input Capture Register 6	IPCP6	R		XXXXXXXXXB
00792EH	Input Capture Register 7	IPCP7	R		XXXXXXXXXB
00792FH	Input Capture Register 7	IPCP7	R		XXXXXXXXXB
007930H to 007937H	Reserved				
007938H	Output Compare Register 4	OCCP4	R/W	Output Compare 4/5	XXXXXXXXXB
007939H	Output Compare Register 4	OCCP4	R/W		XXXXXXXXXB
00793AH	Output Compare Register 5	OCCP5	R/W		XXXXXXXXXB
00793BH	Output Compare Register 5	OCCP5	R/W		XXXXXXXXXB
00793CH	Output Compare Register 6	OCCP6	R/W	Output Compare 6/7	XXXXXXXXXB
00793DH	Output Compare Register 6	OCCP6	R/W		XXXXXXXXXB
00793EH	Output Compare Register 7	OCCP7	R/W		XXXXXXXXXB
00793FH	Output Compare Register 7	OCCP7	R/W		XXXXXXXXXB
007940H	Timer Data Register 0	TCDT0	R/W	I/O Timer 0	0000000B
007941H	Timer Data Register 0	TCDT0	R/W		0000000B
007942H	Timer Control Status Register 0	TCCSL0	R/W		0000000B
007943H	Timer Control Status Register 0	TCCSH0	R/W		0XXXXXXXXB
007944H	Timer Data Register 1	TCDT1	R/W	I/O Timer 1	0000000B
007945H	Timer Data Register 1	TCDT1	R/W		0000000B
007946H	Timer Control Status Register 1	TCCSL1	R/W		0000000B
007947H	Timer Control Status Register 1	TCCSH1	R/W		0XXXXXXXXB
007948H	Timer Register 0/Reload Register 0	TMR0/	R/W	16-bit Reload Timer 0	XXXXXXXXXB
007949H		TMRLR0	R/W		XXXXXXXXXB
00794AH	Timer Register 1/Reload Register 1	TMR1/	R/W	16-bit Reload Timer 1	XXXXXXXXXB
00794BH		TMRLR1	R/W		XXXXXXXXXB
00794CH	Timer Register 2/Reload Register 2	TMR2/	R/W	16-bit Reload Timer 2	XXXXXXXXXB
00794DH		TMRLR2	R/W		XXXXXXXXXB
00794EH	Timer Register 3/Reload Register 3	TMR3/	R/W	16-bit Reload Timer 3	XXXXXXXXXB
00794FH		TMRLR3	R/W		XXXXXXXXXB

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Resource name	Initial value
007950H	Serial Mode Register 3	SMR3	W, R/W	UART3	00000000 <sub>B</sub>
007951H	Serial Control Register 3	SCR3	W, R/W		00000000 <sub>B</sub>
007952H	Reception/Transmission Data Register 3	RDR3/TDR3	R/W		00000000 <sub>B</sub>
007953H	Serial Status Register 3	SSR3	R,R/W		00001000 <sub>B</sub>
007954H	Extended Communication Control Register 3	ECCR3	R,W, R/W		000000XX <sub>B</sub>
007955H	Extended Status Control Register 3	ESCR3	R/W		00000100 <sub>B</sub>
007956H	Baud Rate Generator Register 30	BGR30	R/W		00000000 <sub>B</sub>
007957H	Baud Rate Generator Register 31	BGR31	R/W		00000000 <sub>B</sub>
007958H, 007959H	Reserved				
007960H	Clock supervisor Control Register	CSVCR	R, R/W	Clock supervisor	00011100 <sub>B</sub>
007961H to 00796DH	Reserved				
00796EH	CAN Direct Mode Register	CDMR	R/W	CAN Clock Sync	XXXXXXXX0 <sub>B</sub>
00796FH	Reserved				
007970H	I <sup>2</sup> C Bus Status Register 0	IBSR0	R	I <sup>2</sup> C Interface 0	00000000 <sub>B</sub>
007971H	I <sup>2</sup> C Bus Control Register 0	IBCR0	W,R/W		00000000 <sub>B</sub>
007972H	I <sup>2</sup> C 10-bit Slave Address Register 0	ITBAL0	R/W		00000000 <sub>B</sub>
007973H		ITBAH0	R/W		00000000 <sub>B</sub>
007974H	I <sup>2</sup> C 10-bit Slave Address Mask Register 0	ITMKL0	R/W		11111111 <sub>B</sub>
007975H		ITMKH0	R/W		00111111 <sub>B</sub>
007976H	I <sup>2</sup> C 7-bit Slave Address Register 0	ISBA0	R/W		00000000 <sub>B</sub>
007977H	I <sup>2</sup> C 7-bit Slave Address Mask Register 0	ISMK0	R/W		01111111 <sub>B</sub>
007978H	I <sup>2</sup> C data register 0	IDAR0	R/W	00000000 <sub>B</sub>	
007979H, 00797AH	Reserved				
00797BH	I <sup>2</sup> C Clock Control Register 0	ICCR0	R/W	I <sup>2</sup> C Interface 0	00011111 <sub>B</sub>
00797CH to 0079A1H	Reserved				
0079A2H	Flash Write Control Register 0	FWR0	R/W	Dual Operation Flash	00000000 <sub>B</sub>
0079A3H	Flash Write Control Register 1	FWR1	R/W		00000000 <sub>B</sub>
0079A4H	Sector Change Setting Register 0	SSR0	R/W		00XXXXX0 <sub>B</sub>
0079A5H to 0079C1H	Reserved				
0079C2H	Setting Prohibited				

(Continued)



# MB90350E Series

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
0079C3 <sub>H</sub> to 0079DF <sub>H</sub>	Reserved				
0079E0 <sub>H</sub>	Detect Address Setting Register 0	PADR0	R/W	Address Match Detection 0	XXXXXXXX <sub>B</sub>
0079E1 <sub>H</sub>	Detect Address Setting Register 0	PADR0	R/W		XXXXXXXX <sub>B</sub>
0079E2 <sub>H</sub>	Detect Address Setting Register 0	PADR0	R/W		XXXXXXXX <sub>B</sub>
0079E3 <sub>H</sub>	Detect Address Setting Register 1	PADR1	R/W		XXXXXXXX <sub>B</sub>
0079E4 <sub>H</sub>	Detect Address Setting Register 1	PADR1	R/W		XXXXXXXX <sub>B</sub>
0079E5 <sub>H</sub>	Detect Address Setting Register 1	PADR1	R/W		XXXXXXXX <sub>B</sub>
0079E6 <sub>H</sub>	Detect Address Setting Register 2	PADR2	R/W		XXXXXXXX <sub>B</sub>
0079E7 <sub>H</sub>	Detect Address Setting Register 2	PADR2	R/W		XXXXXXXX <sub>B</sub>
0079E8 <sub>H</sub>	Detect Address Setting Register 2	PADR2	R/W		XXXXXXXX <sub>B</sub>
0079E9 <sub>H</sub> to 0079EF <sub>H</sub>	Reserved				
0079F0 <sub>H</sub>	Detect Address Setting Register 3	PADR3	R/W	Address Match Detection 1	XXXXXXXX <sub>B</sub>
0079F1 <sub>H</sub>	Detect Address Setting Register 3	PADR3	R/W		XXXXXXXX <sub>B</sub>
0079F2 <sub>H</sub>	Detect Address Setting Register 3	PADR3	R/W		XXXXXXXX <sub>B</sub>
0079F3 <sub>H</sub>	Detect Address Setting Register 4	PADR4	R/W		XXXXXXXX <sub>B</sub>
0079F4 <sub>H</sub>	Detect Address Setting Register 4	PADR4	R/W		XXXXXXXX <sub>B</sub>
0079F5 <sub>H</sub>	Detect Address Setting Register 4	PADR4	R/W		XXXXXXXX <sub>B</sub>
0079F6 <sub>H</sub>	Detect Address Setting Register 5	PADR5	R/W		XXXXXXXX <sub>B</sub>
0079F7 <sub>H</sub>	Detect Address Setting Register 5	PADR5	R/W		XXXXXXXX <sub>B</sub>
0079F8 <sub>H</sub>	Detect Address Setting Register 5	PADR5	R/W		XXXXXXXX <sub>B</sub>
0079F9 <sub>H</sub> to 007BFF <sub>H</sub>	Reserved				
007C00 <sub>H</sub> to 007DFF <sub>H</sub>	Reserved for CAN controller 1. Refer to “■ CAN CONTROLLERS”				
007E00 <sub>H</sub> to 007FFF <sub>H</sub>	Reserved				

- Notes :
- Initial value of “X” represents unknown value.
  - Any write access to reserved addresses in I/O map should not be performed. A read access to reserved addresses results reading unknown value.

# MB90350E Series

## ■ CAN CONTROLLERS

- Compliant with CAN standard Version2.0 Part A and Part B
  - Supports transmission/reception in standard frame and extended frame formats
- Supports transmitting of data frames by receiving remote frames
- 16 transmitting/receiving message buffers
  - 29-bit ID and 8-byte data
  - Multi-level message buffer configuration
- Provides full-bit comparison, full-bit mask, acceptance register 0/acceptance register 1 for each message buffer as ID acceptance mask
  - Two acceptance mask registers in either standard frame format or extended frame formats
- Bit rate programmable from 10 kbps to 2 Mbps (when input clock is at 16 MHz)

**List of Control Registers**

Address	Register	Abbreviation	Access	Initial Value
<b>CAN1</b>				
000080 <sub>H</sub>	Message buffer enable register	BVALR	R/W	00000000 <sub>B</sub>
000081 <sub>H</sub>				00000000 <sub>B</sub>
000082 <sub>H</sub>	Transmit request register	TREQR	R/W	00000000 <sub>B</sub>
000083 <sub>H</sub>				00000000 <sub>B</sub>
000084 <sub>H</sub>	Transmit cancel register	TCANR	W	00000000 <sub>B</sub>
000085 <sub>H</sub>				00000000 <sub>B</sub>
000086 <sub>H</sub>	Transmission complete register	TCR	R/W	00000000 <sub>B</sub>
000087 <sub>H</sub>				00000000 <sub>B</sub>
000088 <sub>H</sub>	Receive complete register	RCR	R/W	00000000 <sub>B</sub>
000089 <sub>H</sub>				00000000 <sub>B</sub>
00008A <sub>H</sub>	Remote request receiving register	RRTRR	R/W	00000000 <sub>B</sub>
00008B <sub>H</sub>				00000000 <sub>B</sub>
00008C <sub>H</sub>	Receive overrun register	ROVRR	R/W	00000000 <sub>B</sub>
00008D <sub>H</sub>				00000000 <sub>B</sub>
00008E <sub>H</sub>	Reception interrupt enable register	RIER	R/W	00000000 <sub>B</sub>
00008F <sub>H</sub>				00000000 <sub>B</sub>

(Continued)

# MB90350E Series

(Continued)

Address	Register	Abbreviation	Access	Initial Value
<b>CAN1</b>				
007D00 <sub>H</sub>	Control status register	CSR	R/W, W R/W, R	0XXXX0X1 <sub>B</sub>
007D01 <sub>H</sub>				00XXX000 <sub>B</sub>
007D02 <sub>H</sub>	Last event indicator register	LEIR	R/W	000X0000 <sub>B</sub>
007D03 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D04 <sub>H</sub>	Receive/transmit error counter	RTEC	R	00000000 <sub>B</sub>
007D05 <sub>H</sub>				00000000 <sub>B</sub>
007D06 <sub>H</sub>	Bit timing register	BTR	R/W	11111111 <sub>B</sub>
007D07 <sub>H</sub>				X1111111 <sub>B</sub>
007D08 <sub>H</sub>	IDE register	IDER	R/W	XXXXXXXX <sub>B</sub>
007D09 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D0A <sub>H</sub>	Transmit RTR register	TRTRR	R/W	00000000 <sub>B</sub>
007D0B <sub>H</sub>				00000000 <sub>B</sub>
007D0C <sub>H</sub>	Remote frame receive waiting register	RFWTR	R/W	XXXXXXXX <sub>B</sub>
007D0D <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D0E <sub>H</sub>	Transmit interrupt enable register	TIER	R/W	00000000 <sub>B</sub>
007D0F <sub>H</sub>				00000000 <sub>B</sub>
007D10 <sub>H</sub>	Acceptance mask select register	AMSR	R/W	XXXXXXXX <sub>B</sub>
007D11 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D12 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D13 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D14 <sub>H</sub>	Acceptance mask register 0	AMR0	R/W	XXXXXXXX <sub>B</sub>
007D15 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D16 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D17 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D18 <sub>H</sub>	Acceptance mask register 1	AMR1	R/W	XXXXXXXX <sub>B</sub>
007D19 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D1A <sub>H</sub>				XXXXXXXX <sub>B</sub>
007D1B <sub>H</sub>				XXXXXXXX <sub>B</sub>

# MB90350E Series

List of Message Buffers (ID Registers)

Address	Register	Abbreviation	Access	Initial Value
<b>CAN1</b>				
007C00 <sub>H</sub> to 007C1F <sub>H</sub>	General-purpose RAM	—	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007C20 <sub>H</sub>	ID register 0	IDR0	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C21 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C22 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C23 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C24 <sub>H</sub>	ID register 1	IDR1	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C25 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C26 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C27 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C28 <sub>H</sub>	ID register 2	IDR2	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C29 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C2A <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C2B <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C2C <sub>H</sub>	ID register 3	IDR3	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C2D <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C2E <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C2F <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C30 <sub>H</sub>	ID register 4	IDR4	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C31 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C32 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C33 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C34 <sub>H</sub>	ID register 5	IDR5	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C35 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C36 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C37 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C38 <sub>H</sub>	ID register 6	IDR6	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C39 <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C3A <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C3B <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C3C <sub>H</sub>	ID register 7	IDR7	R/W	XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C3D <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C3E <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>
007C3F <sub>H</sub>				XXXXXXXX <sub>B</sub> XXXXXXXX <sub>B</sub>

(Continued)

# MB90350E Series

(Continued)

Address	Register	Abbreviation	Access	Initial Value
<b>CAN1</b>				
007C40 <sub>H</sub>	ID register 8	IDR8	R/W	XXXXXXXX <sub>B</sub>
007C41 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C42 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C43 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C44 <sub>H</sub>	ID register 9	IDR9	R/W	XXXXXXXX <sub>B</sub>
007C45 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C46 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C47 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C48 <sub>H</sub>	ID register 10	IDR10	R/W	XXXXXXXX <sub>B</sub>
007C49 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C4A <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C4B <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C4C <sub>H</sub>	ID register 11	IDR11	R/W	XXXXXXXX <sub>B</sub>
007C4D <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C4E <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C4F <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C50 <sub>H</sub>	ID register 12	IDR12	R/W	XXXXXXXX <sub>B</sub>
007C51 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C52 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C53 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C54 <sub>H</sub>	ID register 13	IDR13	R/W	XXXXXXXX <sub>B</sub>
007C55 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C56 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C57 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C58 <sub>H</sub>	ID register 14	IDR14	R/W	XXXXXXXX <sub>B</sub>
007C59 <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C5A <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C5B <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C5C <sub>H</sub>	ID register 15	IDR15	R/W	XXXXXXXX <sub>B</sub>
007C5D <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C5E <sub>H</sub>				XXXXXXXX <sub>B</sub>
007C5F <sub>H</sub>				XXXXXXXX <sub>B</sub>

# MB90350E Series

List of Message Buffers (DLC Registers and Data Registers)

Address	Register	Abbreviation	Access	Initial Value
<b>CAN1</b>				
007C60 <sub>H</sub>	DLC register 0	DLCR0	R/W	XXXXXXXX <sub>B</sub>
007C61 <sub>H</sub>				
007C62 <sub>H</sub>	DLC register 1	DLCR1	R/W	XXXXXXXX <sub>B</sub>
007C63 <sub>H</sub>				
007C64 <sub>H</sub>	DLC register 2	DLCR2	R/W	XXXXXXXX <sub>B</sub>
007C65 <sub>H</sub>				
007C66 <sub>H</sub>	DLC register 3	DLCR3	R/W	XXXXXXXX <sub>B</sub>
007C67 <sub>H</sub>				
007C68 <sub>H</sub>	DLC register 4	DLCR4	R/W	XXXXXXXX <sub>B</sub>
007C69 <sub>H</sub>				
007C6A <sub>H</sub>	DLC register 5	DLCR5	R/W	XXXXXXXX <sub>B</sub>
007C6B <sub>H</sub>				
007C6C <sub>H</sub>	DLC register 6	DLCR6	R/W	XXXXXXXX <sub>B</sub>
007C6D <sub>H</sub>				
007C6E <sub>H</sub>	DLC register 7	DLCR7	R/W	XXXXXXXX <sub>B</sub>
007C6F <sub>H</sub>				
007C70 <sub>H</sub>	DLC register 8	DLCR8	R/W	XXXXXXXX <sub>B</sub>
007C71 <sub>H</sub>				
007C72 <sub>H</sub>	DLC register 9	DLCR9	R/W	XXXXXXXX <sub>B</sub>
007C73 <sub>H</sub>				
007C74 <sub>H</sub>	DLC register 10	DLCR10	R/W	XXXXXXXX <sub>B</sub>
007C75 <sub>H</sub>				
007C76 <sub>H</sub>	DLC register 11	DLCR11	R/W	XXXXXXXX <sub>B</sub>
007C77 <sub>H</sub>				
007C78 <sub>H</sub>	DLC register 12	DLCR12	R/W	XXXXXXXX <sub>B</sub>
007C79 <sub>H</sub>				
007C7A <sub>H</sub>	DLC register 13	DLCR13	R/W	XXXXXXXX <sub>B</sub>
007C7B <sub>H</sub>				
007C7C <sub>H</sub>	DLC register 14	DLCR14	R/W	XXXXXXXX <sub>B</sub>
007C7D <sub>H</sub>				
007C7E <sub>H</sub>	DLC register 15	DLCR15	R/W	XXXXXXXX <sub>B</sub>
007C7F <sub>H</sub>				

(Continued)

# MB90350E Series

Address	Register	Abbreviation	Access	Initial Value
<b>CAN1</b>				
007C80H to 007C87H	Data register 0 (8 bytes)	DTR0	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007C88H to 007C8FH	Data register 1 (8 bytes)	DTR1	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007C90H to 007C97H	Data register 2 (8 bytes)	DTR2	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007C98H to 007C9FH	Data register 3 (8 bytes)	DTR3	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CA0H to 007CA7H	Data register 4 (8 bytes)	DTR4	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CA8H to 007CAFH	Data register 5 (8 bytes)	DTR5	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CB0H to 007CB7H	Data register 6 (8 bytes)	DTR6	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CB8H to 007CBFH	Data register 7 (8 bytes)	DTR7	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CC0H to 007CC7H	Data register 8 (8 bytes)	DTR8	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CC8H to 007CCFH	Data register 9 (8 bytes)	DTR9	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CD0H to 007CD7H	Data register 10 (8 bytes)	DTR10	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CD8H to 007CDFH	Data register 11 (8 bytes)	DTR11	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CE0H to 007CE7H	Data register 12 (8 bytes)	DTR12	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CE8H to 007CEFH	Data register 13 (8 bytes)	DTR13	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>

(Continued)

# MB90350E Series

(Continued)

<b>Address</b>	<b>Register</b>	<b>Abbreviation</b>	<b>Access</b>	<b>Initial Value</b>
<b>CAN1</b>				
007CF0 <sub>H</sub> to 007CF7 <sub>H</sub>	Data register 14 (8 bytes)	DTR14	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>
007CF8 <sub>H</sub> to 007CFF <sub>H</sub>	Data register 15 (8 bytes)	DTR15	R/W	XXXXXXXX <sub>B</sub> to XXXXXXXX <sub>B</sub>



## ■ INTERRUPT FACTORS, INTERRUPT VECTORS, INTERRUPT CONTROL REGISTER

Interrupt cause	EI <sup>2</sup> OS corresponding	DMA ch number	Interrupt vector		Interrupt control register	
			Number	Address	Number	Address
Reset	N	—	#08	FFFFDC <sub>H</sub>	—	—
INT9 instruction	N	—	#09	FFFFD8 <sub>H</sub>	—	—
Exception	N	—	#10	FFFFD4 <sub>H</sub>	—	—
Reserved	N	—	#11	FFFFD0 <sub>H</sub>	ICR00	0000B0 <sub>H</sub>
Reserved	N	—	#12	FFFFCC <sub>H</sub>		
CAN 1 RX / Input Capture 6	Y1	—	#13	FFFFC8 <sub>H</sub>	ICR01	0000B1 <sub>H</sub>
CAN 1 TX/NS / Input Capture 7	Y1	—	#14	FFFFC4 <sub>H</sub>		
I <sup>2</sup> C	N	—	#15	FFFFC0 <sub>H</sub>	ICR02	0000B2 <sub>H</sub>
Reserved	N	—	#16	FFFFBC <sub>H</sub>		
16-bit Reload Timer 0	Y1	0	#17	FFFFB8 <sub>H</sub>	ICR03	0000B3 <sub>H</sub>
16-bit Reload Timer 1	Y1	1	#18	FFFFB4 <sub>H</sub>		
16-bit Reload Timer 2	Y1	2	#19	FFFFB0 <sub>H</sub>	ICR04	0000B4 <sub>H</sub>
16-bit Reload Timer 3	Y1	—	#20	FFFFAC <sub>H</sub>		
PPG 4/5	N	—	#21	FFFFA8 <sub>H</sub>	ICR05	0000B5 <sub>H</sub>
PPG 6/7	N	—	#22	FFFFA4 <sub>H</sub>		
PPG 8/9/C/D	N	—	#23	FFFFA0 <sub>H</sub>	ICR06	0000B6 <sub>H</sub>
PPG A/B/E/F	N	—	#24	FFFF9C <sub>H</sub>		
Timebase Timer	N	—	#25	FFFF98 <sub>H</sub>	ICR07	0000B7 <sub>H</sub>
External Interrupt 8 to 11	Y1	3	#26	FFFF94 <sub>H</sub>		
Watch Timer	N	—	#27	FFFF90 <sub>H</sub>	ICR08	0000B8 <sub>H</sub>
External Interrupt 12 to 15	Y1	4	#28	FFFF8C <sub>H</sub>		
A/D Converter	Y1	5	#29	FFFF88 <sub>H</sub>	ICR09	0000B9 <sub>H</sub>
I/O Timer 0 / I/O Timer 1	N	—	#30	FFFF84 <sub>H</sub>		
Input Capture 4/5	Y1	6	#31	FFFF80 <sub>H</sub>	ICR10	0000BA <sub>H</sub>
Output Compare 4/5	Y1	7	#32	FFFF7C <sub>H</sub>		
Input Capture 0/1	Y1	8	#33	FFFF78 <sub>H</sub>	ICR11	0000BB <sub>H</sub>
Output Compare 6/7	Y1	9	#34	FFFF74 <sub>H</sub>		
Reserved	N	10	#35	FFFF70 <sub>H</sub>	ICR12	0000BC <sub>H</sub>
Reserved	N	11	#36	FFFF6C <sub>H</sub>		
UART 3 RX	Y2	12	#37	FFFF68 <sub>H</sub>	ICR13	0000BD <sub>H</sub>
UART 3 TX	Y1	13	#38	FFFF64 <sub>H</sub>		

(Continued)

# MB90350E Series

(Continued)

Interrupt cause	EI <sup>2</sup> OS corresponding	DMA ch number	Interrupt vector		Interrupt control register	
			Number	Address	Number	Address
UART 2 RX	Y2	14	#39	FFFF60 <sub>H</sub>	ICR14	0000BE <sub>H</sub>
UART 2 TX	Y1	15	#40	FFFF5C <sub>H</sub>		
Flash memory	N	—	#41	FFFF58 <sub>H</sub>	ICR15	0000BF <sub>H</sub>
Delayed interrupt	N	—	#42	FFFF54 <sub>H</sub>		

Y1 : Usable

Y2 : Usable, with EI<sup>2</sup>OS stop function

N : Unusable

- Notes :
- The peripheral resources sharing the ICR register have the same interrupt level.
  - When the peripheral resources sharing the ICR register use extended intelligent I/O service, only one can use EI<sup>2</sup>OS at a time.
  - When either of the two peripheral resources sharing the ICR register specifies EI<sup>2</sup>OS, the other one cannot use interrupts.

## ■ ELECTRICAL CHARACTERISTICS

### 1. Absolute Maximum Ratings

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage*1	V <sub>CC</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	
	AV <sub>CC</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	V <sub>CC</sub> = AV <sub>CC</sub> *2
	AV <sub>RH</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	AV <sub>CC</sub> ≥ AV <sub>RH</sub> *2
Input voltage*1	V <sub>I</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	*3
Output voltage*1	V <sub>O</sub>	V <sub>SS</sub> - 0.3	V <sub>SS</sub> + 6.0	V	*3
Maximum Clamp Current	I <sub>CLAMP</sub>	-4.0	+4.0	mA	*5
Total Maximum Clamp Current	Σ I <sub>CLAMP</sub>	—	40	mA	*5
"L" level maximum output current	I <sub>OL</sub>	—	15	mA	*4
"L" level average output current	I <sub>OLAV</sub>	—	4	mA	*4
"L" level maximum overall output current	ΣI <sub>OL</sub>	—	100	mA	*4
"L" level average overall output current	ΣI <sub>OLAV</sub>	—	50	mA	*4
"H" level maximum output current	I <sub>OH</sub>	—	-15	mA	*4
"H" level average output current	I <sub>OHAV</sub>	—	-4	mA	*4
"H" level maximum overall output current	ΣI <sub>OH</sub>	—	-100	mA	*4
"H" level average overall output current	ΣI <sub>OHAV</sub>	—	-50	mA	*4
Power consumption	P <sub>D</sub>	—	320	mW	
Operating temperature	T <sub>A</sub>	-40	+105	°C	
		-40	+125	°C	*6
Storage temperature	T <sub>STG</sub>	-55	+150	°C	

(Continued)

# MB90350E Series

(Continued)

\*1: This parameter is based on  $V_{SS} = AV_{SS} = 0\text{ V}$

\*2: Set  $AV_{CC}$  and  $V_{CC}$  to the same voltage. Make sure that  $AV_{CC}$  does not exceed  $V_{CC}$  and that the voltage at the analog inputs does not exceed  $AV_{CC}$  when the power is switched on.


\*3:  $V_I$  and  $V_O$  should not exceed  $V_{CC} + 0.3\text{ V}$ .  $V_I$  should not exceed the specified ratings. However if the maximum current to/from an input is limited by some means with external components, the  $I_{CLAMP}$  rating supersedes the  $V_I$  rating.

\*4: Applicable to pins: P00 to P07, P10 to P17, P20 to P25, P30 to P37, P40 to P45, P50 to P56, P60 to P67

\*5: • Applicable to pins: P00 to P07, P10 to P17, P20 to P25, P30 to P37, P40 to P45, P50 to P56 (for evaluation device : P50 to P55) , P60 to P67

- Use within recommended operating conditions.
- Use at DC voltage (current)
- The +B signal should always be applied a connecting limit resistance between the +B signal and the microcontroller.
- The value of the limiting resistance should be set so that when the +B signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
- Note that when the microcontroller drive current is low, such as in the power saving modes, the +B input potential may pass through the protective diode and increase the potential at the  $V_{CC}$  pin, and this may affect other devices.
- Note that if a +B signal is input when the microcontroller power supply is off (not fixed at 0 V) , the power supply is provided from the pins, so that incomplete operation may result.
- Note that if the +B input is applied during power-on, the power supply is provided from the pins and the resulting power supply voltage may not be sufficient to operate the power-on reset.
- Care must be taken not to leave the +B input pin open.
- Recommended circuit sample:

- Input/output equivalent circuits

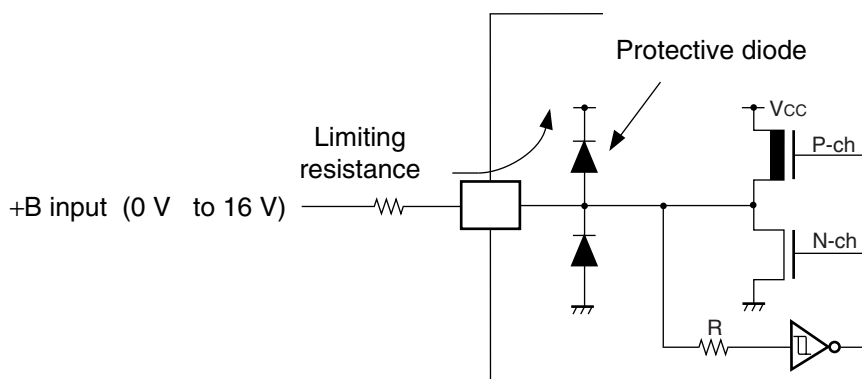

\*6 : If used exceeding  $T_A = +105\text{ }^\circ\text{C}$ , be sure to contact Fujitsu for reliability limitations.

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.


## 2. Recommended Operating Conditions

( $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Value			Unit	Remarks
		Min	Typ	Max		
Power supply voltage	$V_{CC}, AV_{CC}$	4.0	5.0	5.5	V	Under normal operation
		3.5	5.0	5.5	V	Under normal operation, when not using the A/D converter and not Flash programming.
		4.5	5.0	5.5	V	When External bus is used.
		3.0	—	5.5	V	Maintains RAM data in stop mode
Smoothing capacitor	$C_s$	0.1	—	1.0	$\mu\text{F}$	Use a ceramic capacitor or comparable capacitor of the AC characteristics. Bypass capacitor at the $V_{CC}$ pin should be greater than this capacitor.
Operating temperature	$T_A$	-40	—	+125	$^{\circ}\text{C}$	*

\* : If used exceeding  $T_A = +105\text{ }^{\circ}\text{C}$ , be sure to contact Fujitsu for reliability limitations.

### • C Pin Connection Diagram



**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

# MB90350E Series

## 3. DC Characteristics

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
"H" level input voltage (At $V_{CC} = 5\text{ V} \pm 10\%$ )	$V_{IHS}$	—	—	$0.8 V_{CC}$	—	$V_{CC} + 0.3$	V	Pin inputs if CMOS hysteresis input levels are selected (except P12, P15, P44, P45, P50)
	$V_{IHA}$	—	—	$0.8 V_{CC}$	—	$V_{CC} + 0.3$	V	Pin inputs if Automotive input levels are selected
	$V_{IHT}$	—	—	2.0	—	$V_{CC} + 0.3$	V	Pin inputs if TTL input levels are selected
	$V_{IHS}$	—	—	$0.7 V_{CC}$	—	$V_{CC} + 0.3$	V	P12, P15, P50 inputs if CMOS input levels are selected
	$V_{IHI}$	—	—	$0.7 V_{CC}$	—	$V_{CC} + 0.3$	V	P44, P45 inputs if CMOS hysteresis input levels are selected
	$V_{IHR}$	—	—	$0.8 V_{CC}$	—	$V_{CC} + 0.3$	V	$\overline{RST}$ input pin (CMOS hysteresis)
	$V_{IHM}$	—	—	$V_{CC} - 0.3$	—	$V_{CC} + 0.3$	V	MD input pin
"L" level input voltage (At $V_{CC} = 5\text{ V} \pm 10\%$ )	$V_{ILS}$	—	—	$V_{SS} - 0.3$	—	$0.2 V_{CC}$	V	Pin inputs if CMOS hysteresis input levels are selected (except P12, P15, P44, P45, P50)
	$V_{ILA}$	—	—	$V_{SS} - 0.3$	—	$0.5 V_{CC}$	V	Pin inputs if Automotive input levels are selected
	$V_{ILT}$	—	—	$V_{SS} - 0.3$	—	0.8	V	Pin inputs if TTL input levels are selected
	$V_{ILS}$	—	—	$V_{SS} - 0.3$	—	$0.3 V_{CC}$	V	P12, P15, P50 inputs if CMOS input levels are selected
	$V_{ILI}$	—	—	$V_{SS} - 0.3$	—	$0.3 V_{CC}$	V	P44, P45 inputs if CMOS hysteresis input levels are selected
	$V_{ILR}$	—	—	$V_{SS} - 0.3$	—	$0.2 V_{CC}$	V	$\overline{RST}$ input pin (CMOS hysteresis)
	$V_{ILM}$	—	—	$V_{SS} - 0.3$	—	$V_{SS} + 0.3$	V	MD input pin
Output "H" voltage	$V_{OH}$	Normal outputs	$V_{CC} = 4.5\text{ V}$ , $I_{OH} = -4.0\text{ mA}$	$V_{CC} - 0.5$	—	—	V	
Output "H" voltage	$V_{OHI}$	I <sup>2</sup> C current outputs	$V_{CC} = 4.5\text{ V}$ , $I_{OH} = -3.0\text{ mA}$	$V_{CC} - 0.5$	—	—	V	

(Continued)

# MB90350E Series

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Sym- bol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Output "L" voltage	$V_{OL}$	Normal outputs	$V_{CC} = 4.5\text{ V}$ , $I_{OL} = 4.0\text{ mA}$	—	—	0.4	V	
Output "L" voltage	$V_{OLI}$	I <sup>2</sup> C current outputs	$V_{CC} = 4.5\text{ V}$ , $I_{OL} = 3.0\text{ mA}$	—	—	0.4	V	
Input leak current	$I_{IL}$	—	$V_{CC} = 5.5\text{ V}$ , $V_{SS} < V_I < V_{CC}$	-1	—	+1	$\mu\text{A}$	
Pull-up resistance	$R_{UP}$	P00 to P07, P10 to P17, P20 to P25, P30 to P37, $\overline{RST}$	—	25	50	100	$k\Omega$	
Pull-down resistance	$R_{DOWN}$	MD2	—	25	50	100	$k\Omega$	Except Flash memory devices
Power supply current	$I_{CC}$	$V_{CC}$	$V_{CC} = 5.0\text{ V}$ , Internal frequency : 24 MHz, At normal operation.	—	48	60	mA	
			$V_{CC} = 5.0\text{ V}$ , Internal frequency : 24 MHz, At writing Flash memory.	—	53	65	mA	Flash memory devices
			$V_{CC} = 5.0\text{ V}$ , Internal frequency : 24 MHz, At erasing Flash memory.	—	58	70	mA	Flash memory devices
	$I_{CCS}$		$V_{CC} = 5.0\text{ V}$ , Internal frequency : 24 MHz, At Sleep mode.	—	25	35	mA	
	$I_{CTS}$		$V_{CC} = 5.0\text{ V}$ , Internal frequency : 2 MHz, At Main Timer mode	—	0.3	0.8	mA	Devices without "T"-suffix
			—	—	0.4	1.0	mA	Devices with "T"-suffix
$I_{CTSPLL6}$	$V_{CC} = 5.0\text{ V}$ , Internal frequency : 24 MHz, At PLL Timer mode, external frequency = 4 MHz	—	4	7	mA			

(Continued)

# MB90350E Series

( $T_A = -40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current	I <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During stopping clock supervisor, At sub clock operation T <sub>A</sub> = +25°C	—	70	140	μA	MB90F351E MB90F352E MB90351E MB90352E MB90F356E MB90F357E MB90356E MB90357E
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During operating clock supervisor, At sub clock operation T <sub>A</sub> = +25°C	—	100	200	μA	MB90F356E MB90F357E MB90356E MB90357E
			V <sub>CC</sub> = 5.0 V, Internal CR oscillation/ 4 division, At sub clock operation T <sub>A</sub> = +25°C	—	100	200	μA	MB90F356ES MB90F357ES MB90356ES MB90357ES
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During stopping clock supervisor, At sub clock operation T <sub>A</sub> = +25°C	—	120	240	μA	MB90F351TE MB90F352TE MB90351TE MB90352TE MB90F356TE MB90F357TE MB90356TE MB90357TE
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During operating clock supervisor, At sub clock operation T <sub>A</sub> = +25°C	—	150	300	μA	MB90F356TE MB90F357TE MB90356TE MB90357TE
			V <sub>CC</sub> = 5.0 V, Internal CR oscillation/ 4 division, At sub clock operation T <sub>A</sub> = +25°C	—	150	300	μA	MB90F356TES MB90F357TES MB90356TES MB90357TES

(Continued)



# MB90350E Series

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current	I <sub>CCLS</sub>	V <sub>CC</sub>	V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During stopping clock supervisor, At sub sleep T <sub>A</sub> = +25°C	—	20	50	μA	MB90F351E MB90F352E MB90351E MB90352E MB90F356E MB90F357E MB90356E MB90357E
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During operating clock supervisor, At sub sleep T <sub>A</sub> = +25°C	—	60	200	μA	MB90F356E MB90F357E MB90356E MB90357E
			V <sub>CC</sub> = 5.0 V, Internal CR oscillation/ 4 division, At sub sleep T <sub>A</sub> = +25°C	—	60	200	μA	MB90F356ES MB90F357ES MB90356ES MB90357ES
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, At sub sleep T <sub>A</sub> = +25°C	—	70	150	μA	MB90F351TE MB90F352TE MB90351TE MB90352TE MB90F356TE MB90F357TE MB90356TE MB90357TE
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During operating clock supervisor, At sub sleep T <sub>A</sub> = +25°C	—	110	300	μA	MB90F356TE MB90F357TE MB90356TE MB90357TE
			V <sub>CC</sub> = 5.0 V, Internal CR oscillation/ 4 division, At sub sleep T <sub>A</sub> = +25°C	—	110	300	μA	MB90F356TES MB90F357TES MB90356TES MB90357TES

(Continued)

# MB90350E Series

(Continued)

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current	I <sub>CC1</sub>	V <sub>CC</sub>	V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During stopping clock supervisor, At watch mode T <sub>A</sub> = +25°C	—	10	35	μA	MB90F351E MB90F352E MB90351E MB90352E MB90F356E MB90F357E MB90356E MB90357E
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During operating clock supervisor, At watch mode T <sub>A</sub> = +25°C	—	25	150	μA	MB90F356E MB90F357E MB90356E MB90357E
			V <sub>CC</sub> = 5.0 V, Internal CR oscillation/ 4 division, At watch mode T <sub>A</sub> = +25°C	—	25	150	μA	MB90F356ES MB90F357ES MB90356ES MB90357ES
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During stopping clock supervisor, At watch mode T <sub>A</sub> = +25°C	—	60	140	μA	MB90F351TE MB90F352TE MB90351TE MB90352TE MB90F356TE MB90F357TE MB90356TE MB90357TE
			V <sub>CC</sub> = 5.0 V, Internal frequency: 8 kHz, During operating clock supervisor, At watch mode T <sub>A</sub> = +25°C	—	80	250	μA	MB90F356TE MB90F357TE MB90356TE MB90357TE
			V <sub>CC</sub> = 5.0 V, Internal CR oscillation/ 4 division, At watch mode T <sub>A</sub> = +25°C	—	80	250	μA	MB90F356TES MB90F357TES MB90356TES MB90357TES
	I <sub>CC2</sub>		V <sub>CC</sub> = 5.0 V, At stop mode, T <sub>A</sub> = +25°C	—	7	25	μA	Devices without "T"-suffix
		—	60	130	μA	Devices with "T"-suffix		
Input capacity	C <sub>IN</sub>	Other than C, AV <sub>CC</sub> , AV <sub>SS</sub> , AVRH, V <sub>CC</sub> , V <sub>SS</sub>	—	5	15	pF		

## 4. AC Characteristics

### (1) Clock Timing

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Clock frequency	$f_c$	X0, X1	3	—	16	MHz	1/2 (at PLL stop) When using an oscillation circuit
			4	—	16	MHz	1 multiplied PLL When using an oscillation circuit
			4	—	12	MHz	2 multiplied PLL When using an oscillation circuit
			4	—	8	MHz	3 multiplied PLL When using an oscillation circuit
			4	—	6	MHz	4 multiplied PLL When using an oscillation circuit
			—	—	4	MHz	6 multiplied PLL When using an oscillation circuit
		X0	3	—	24	MHz	1/2 (at PLL stop), When using an external clock
			4	—	24	MHz	1 multiplied PLL When using an external clock
			4	—	12	MHz	2 multiplied PLL When using an external clock
			4	—	8	MHz	3 multiplied PLL When using an external clock
			4	—	6	MHz	4 multiplied PLL When using an external clock
			—	—	4	MHz	6 multiplied PLL When using an external clock
	$f_{CL}$	X0A, X1A	—	32.768	100	kHz	When using sub clock
Clock cycle time	$t_{CYL}$	X0, X1	62.5	—	333	ns	When using an oscillation circuit
		X0	41.67	—	333	ns	When using an external clock
	$t_{CYLL}$	X0A, X1A	10	30.5	—	$\mu\text{s}$	
Input clock pulse width	$P_{WH}, P_{WL}$	X0	10	—	—	ns	Duty ratio should be about 30% to 70%.
	$P_{WHL}, P_{WLL}$	X0A	5	15.2	—	$\mu\text{s}$	
Input clock rise and fall time	$t_{CR}, t_{CF}$	X0	—	—	5	ns	When using an external clock

(Continued)


# MB90350E Series

(Continued)


( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Internal operating clock frequency (machine clock)	$f_{CP}$	—	1.5	—	24	MHz	When using main clock
	$f_{CPL}$	—	—	8.192	50	kHz	When using sub clock
Internal operating clock cycle time (machine clock)	$t_{CP}$	—	41.67	—	666	ns	When using main clock
	$t_{CPL}$	—	20	122.1	—	$\mu\text{s}$	When using sub clock


## • Clock Timing

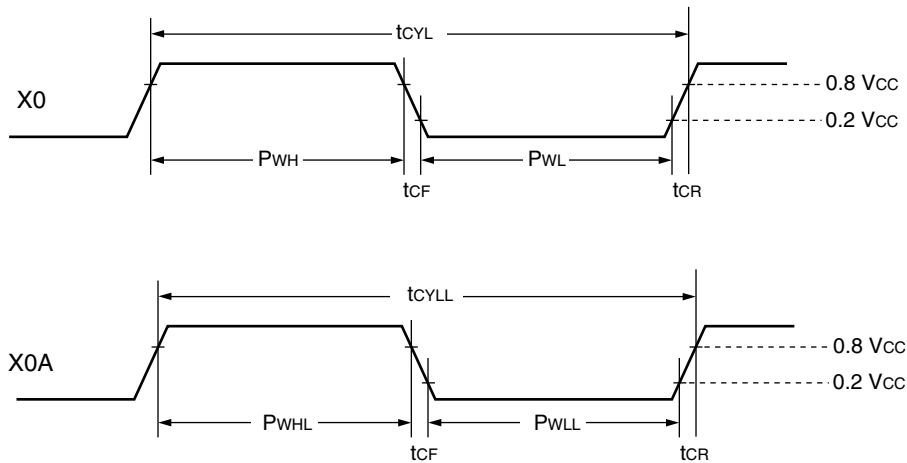

• PLL guaranteed operation range

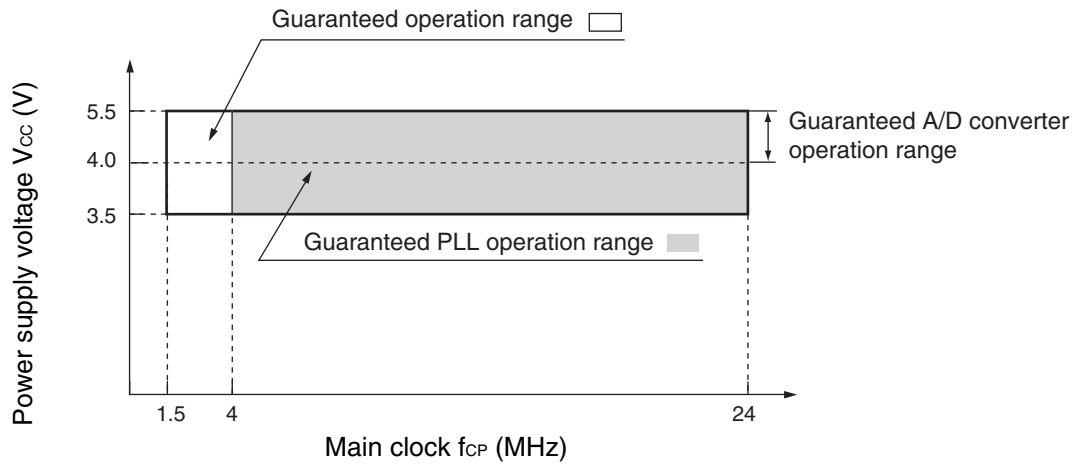

**Guaranteed operation range of MB90350E series**

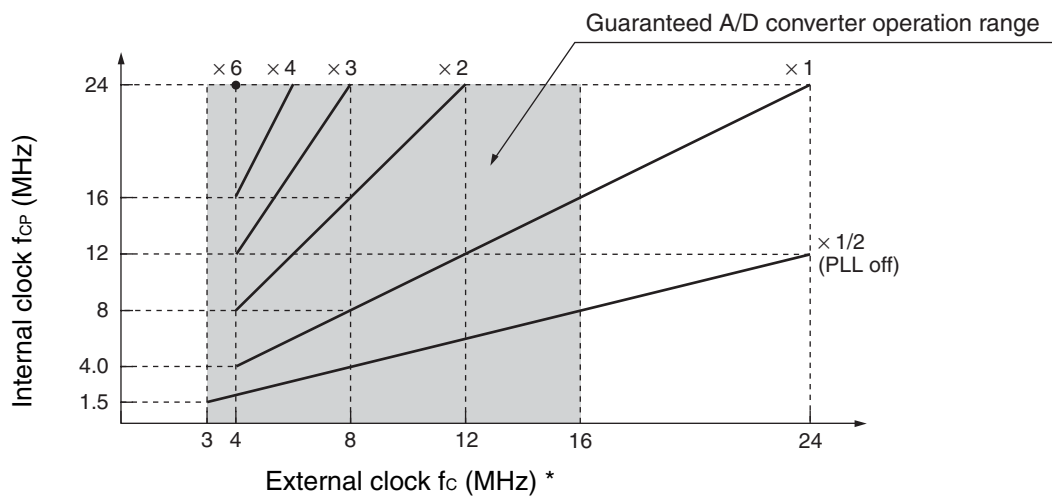

\* : When using crystal oscillator or ceramic oscillator, the maximum clock frequency is 16 MHz.

**External clock frequency and internal operation clock frequency**


# MB90350E Series

## (2) Reset Standby Input

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Value		Unit	Remarks
			Min	Max		
Reset input time	$t_{RSTL}$	$\overline{RST}$	500	—	ns	Under normal operation
			Oscillation time of oscillator* + 100 $\mu\text{s}$	—	$\mu\text{s}$	In Stop mode, Sub Clock mode, Sub Sleep mode and Watch mode
			100	—	$\mu\text{s}$	In Main timer mode and PLL timer mode


\* : Oscillation time of oscillator is the time that the amplitude reaches 90%. In the crystal oscillator, the oscillation time is between several ms to tens of ms. In ceramic oscillators, the oscillation time is between hundreds of  $\mu\text{s}$  to several ms. With an external clock, the oscillation time is 0 ms.

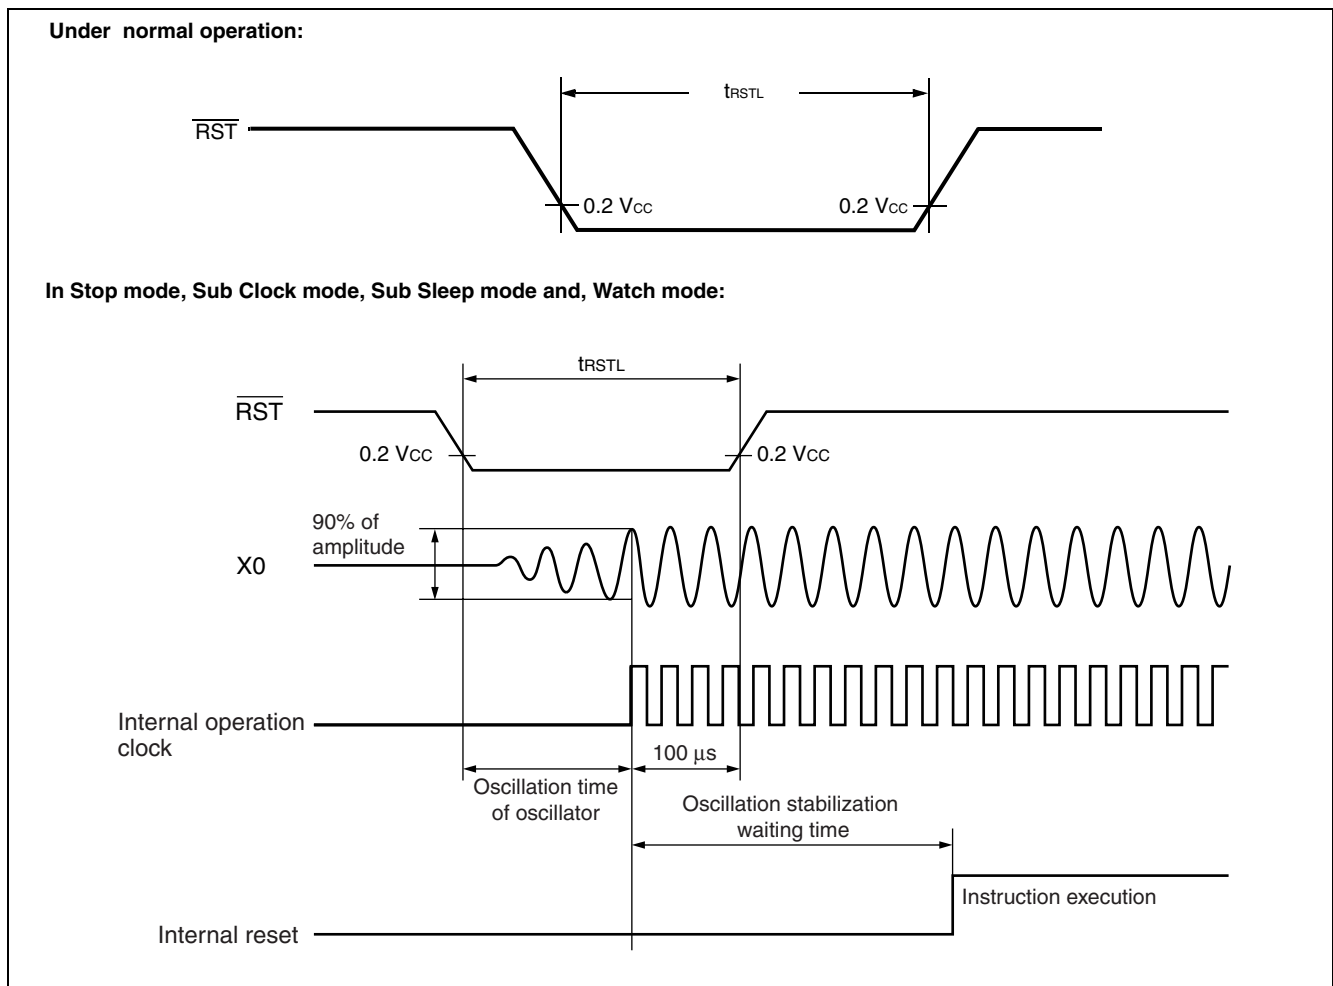


### (3) Power On Reset

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Power on rise time	$t_R$	$V_{CC}$	—	0.05	30	ms	
Power off time	$t_{OFF}$	$V_{CC}$	—	1	—	ms	Waiting time until power-on

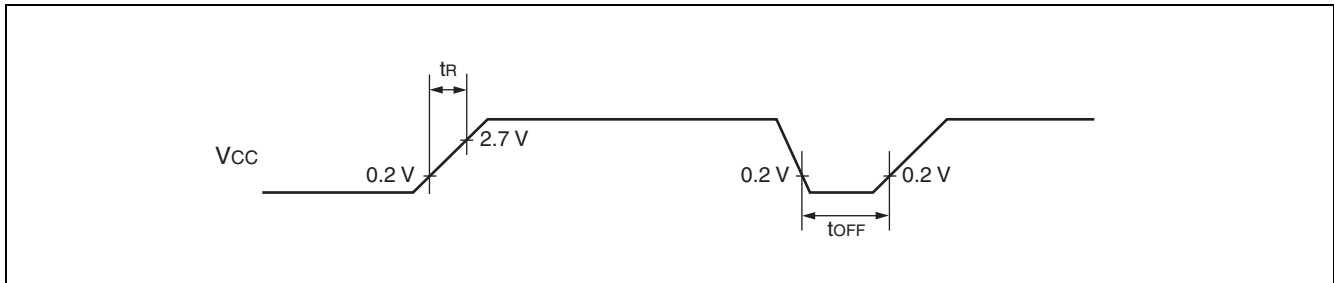


Note : If you change the power supply voltage too rapidly, a power on reset may occur. We recommend that you start up smoothly by restraining voltages when changing the power supply voltage during operation, as shown in the figure below. Perform while not using the PLL clock. However, if voltage drops are within 1 V/s, you can operate while using the PLL clock.

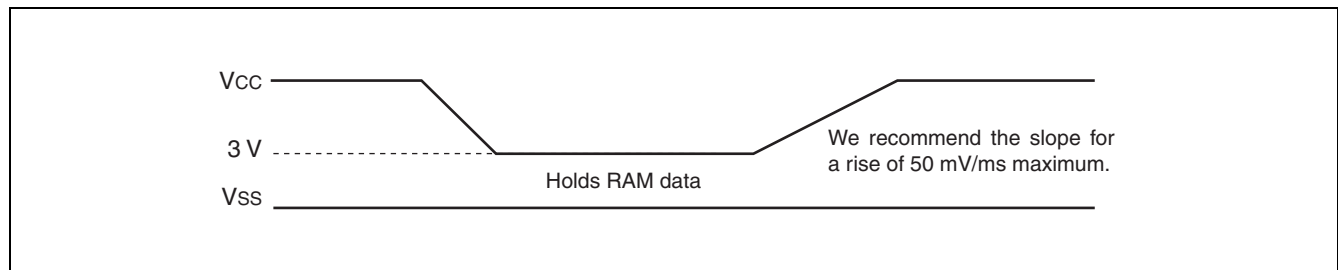

### (4) Clock Output Timing

( $T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Cycle time	$t_{CYC}$	CLK	—	62.5	—	ns	$f_{CP} = 16\text{ MHz}$
				41.76	—	ns	$f_{CP} = 24\text{ MHz}$
CLK $\uparrow \rightarrow$ CLK $\downarrow$	$t_{CHCL}$	CLK	—	20	—	ns	$f_{CP} = 16\text{ MHz}$
				13	—	ns	$f_{CP} = 24\text{ MHz}$

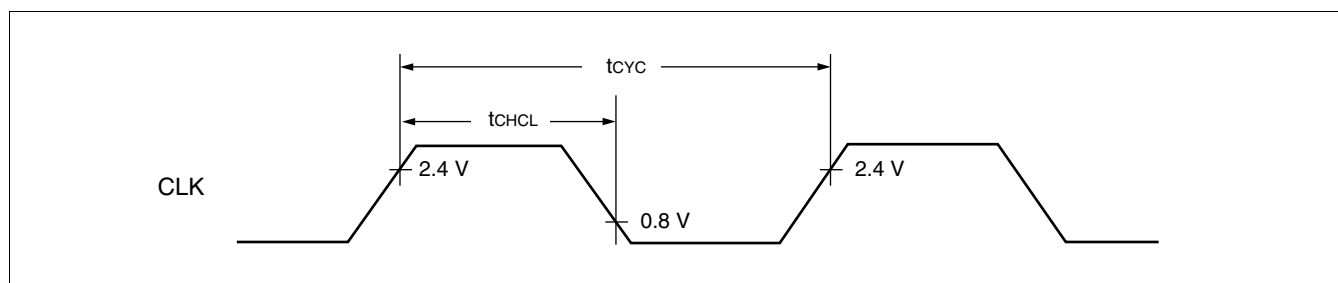

# MB90350E Series


## (5) Bus Timing (Read)

( $T_A = -40^\circ\text{C}$  to  $+105^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

Parameter	Symbol	Pin	Condition	Value		Unit
				Min	Max	
ALE pulse width	$t_{LHLL}$	ALE	—	$t_{CP}/2 - 10$	—	ns
Valid address → ALE ↓ time	$t_{AVLL}$	ALE, A21 to A16, AD15 to AD00		$t_{CP}/2 - 20$	—	ns
ALE ↓ → Address valid time	$t_{LLAX}$	ALE, AD15 to AD00		$t_{CP}/2 - 15$	—	ns
Valid address → $\overline{RD}$ ↓ time	$t_{AVRL}$	A21 to A16, AD15 to AD00, $\overline{RD}$		$t_{CP} - 15$	—	ns
Valid address → Valid data input	$t_{AVDV}$	A21 to A16, AD15 to AD00		—	$5 t_{CP}/2 - 60$	ns
$\overline{RD}$ pulse width	$t_{RLRH}$	$\overline{RD}$		$(n^*+3/2) t_{CP} - 20$	—	ns
$\overline{RD}$ ↓ → Valid data input	$t_{RLDV}$	$\overline{RD}$ , AD15 to AD00		—	$(n^*+3/2) t_{CP} - 50$	ns
$\overline{RD}$ ↑ → Data hold time	$t_{RHDX}$	$\overline{RD}$ , AD15 to AD00		0	—	ns
$\overline{RD}$ ↑ → ALE ↑ time	$t_{RHLH}$	$\overline{RD}$ , ALE		$t_{CP}/2 - 15$	—	ns
$\overline{RD}$ ↑ → Address valid time	$t_{RHAX}$	$\overline{RD}$ , A21 to A16		$t_{CP}/2 - 10$	—	ns
Valid address → CLK ↑ time	$t_{AVCH}$	A21 to A16, AD15 to AD00, CLK		$t_{CP}/2 - 16$	—	ns
$\overline{RD}$ ↓ → CLK ↑ time	$t_{RLCH}$	$\overline{RD}$ , CLK		$t_{CP}/2 - 15$	—	ns
ALE ↓ → $\overline{RD}$ ↓ time	$t_{LLRL}$	ALE, $\overline{RD}$		$t_{CP}/2 - 15$	—	ns

\* : Number of ready cycles



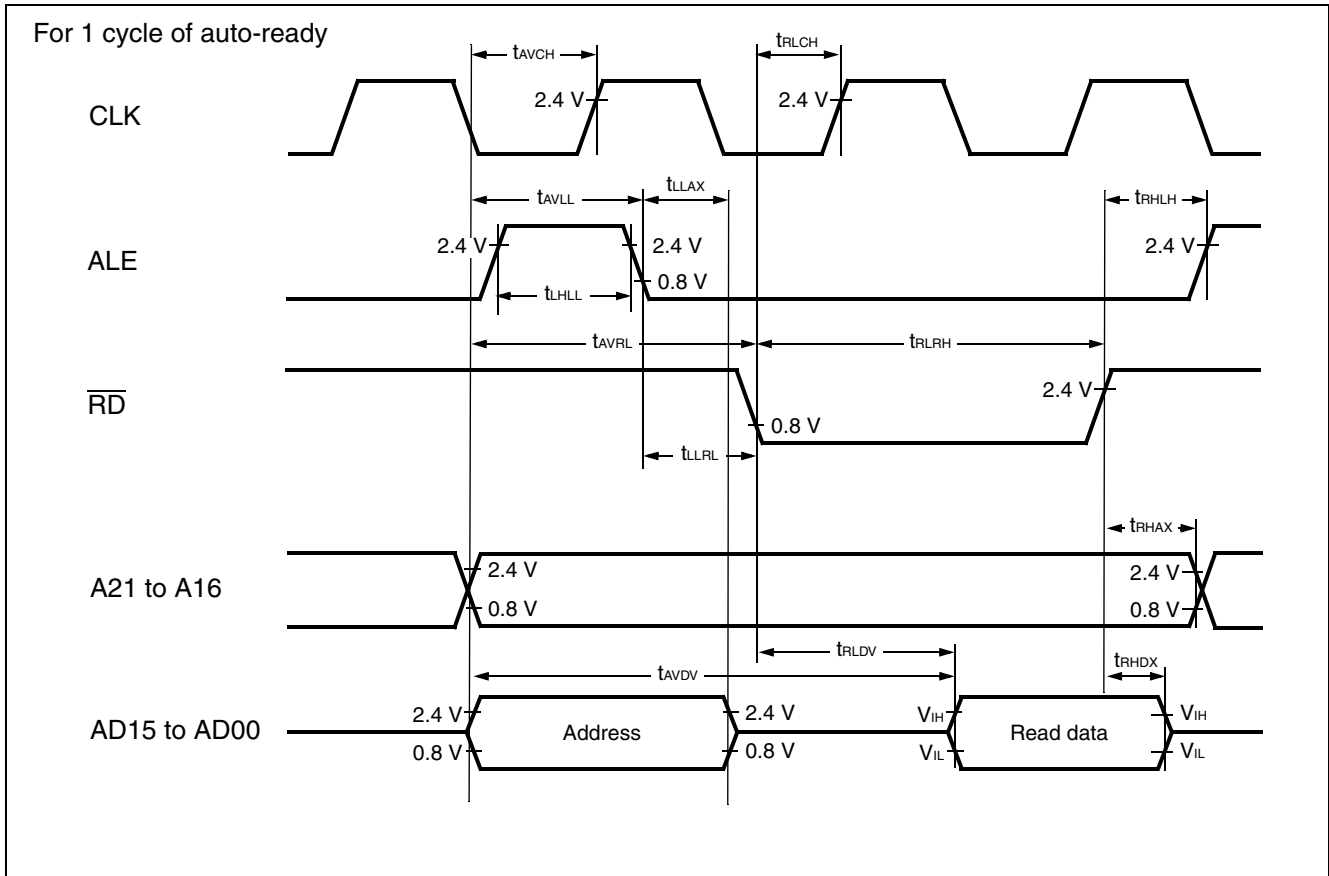


# MB90350E Series

## (6) Bus Timing (Write)

( $T_A = -40^\circ\text{C}$  to  $+105^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

Parameter	Symbol	Pin	Condition	Value		Unit
				Min	Max	
Valid address $\rightarrow \overline{\text{WR}} \downarrow$ time	$t_{AVWL}$	A21 to A16, AD15 to AD00, $\overline{\text{WR}}$	—	$t_{CP} - 15$	—	ns
$\overline{\text{WR}}$ pulse width	$t_{WLWH}$	$\overline{\text{WR}}$		$(n^* + 3/2)t_{CP} - 20$	—	ns
Valid data output $\rightarrow \overline{\text{WR}} \uparrow$ time	$t_{DVWH}$	AD15 to AD00, $\overline{\text{WR}}$		$(n^* + 3/2)t_{CP} - 20$	—	ns
$\overline{\text{WR}} \uparrow \rightarrow$ Data hold time	$t_{WHDX}$	AD15 to AD00, $\overline{\text{WR}}$		15	—	ns
$\overline{\text{WR}} \uparrow \rightarrow$ Address valid time	$t_{WHAX}$	A21 to A16, $\overline{\text{WR}}$		$t_{CP}/2 - 10$	—	ns
$\overline{\text{WR}} \uparrow \rightarrow$ ALE $\uparrow$ time	$t_{WHLH}$	$\overline{\text{WR}}$ , ALE		$t_{CP}/2 - 15$	—	ns
$\overline{\text{WR}} \downarrow \rightarrow$ CLK $\uparrow$ time	$t_{WLCH}$	$\overline{\text{WR}}$ , CLK		$t_{CP}/2 - 15$	—	ns

\* : Number of ready cycles

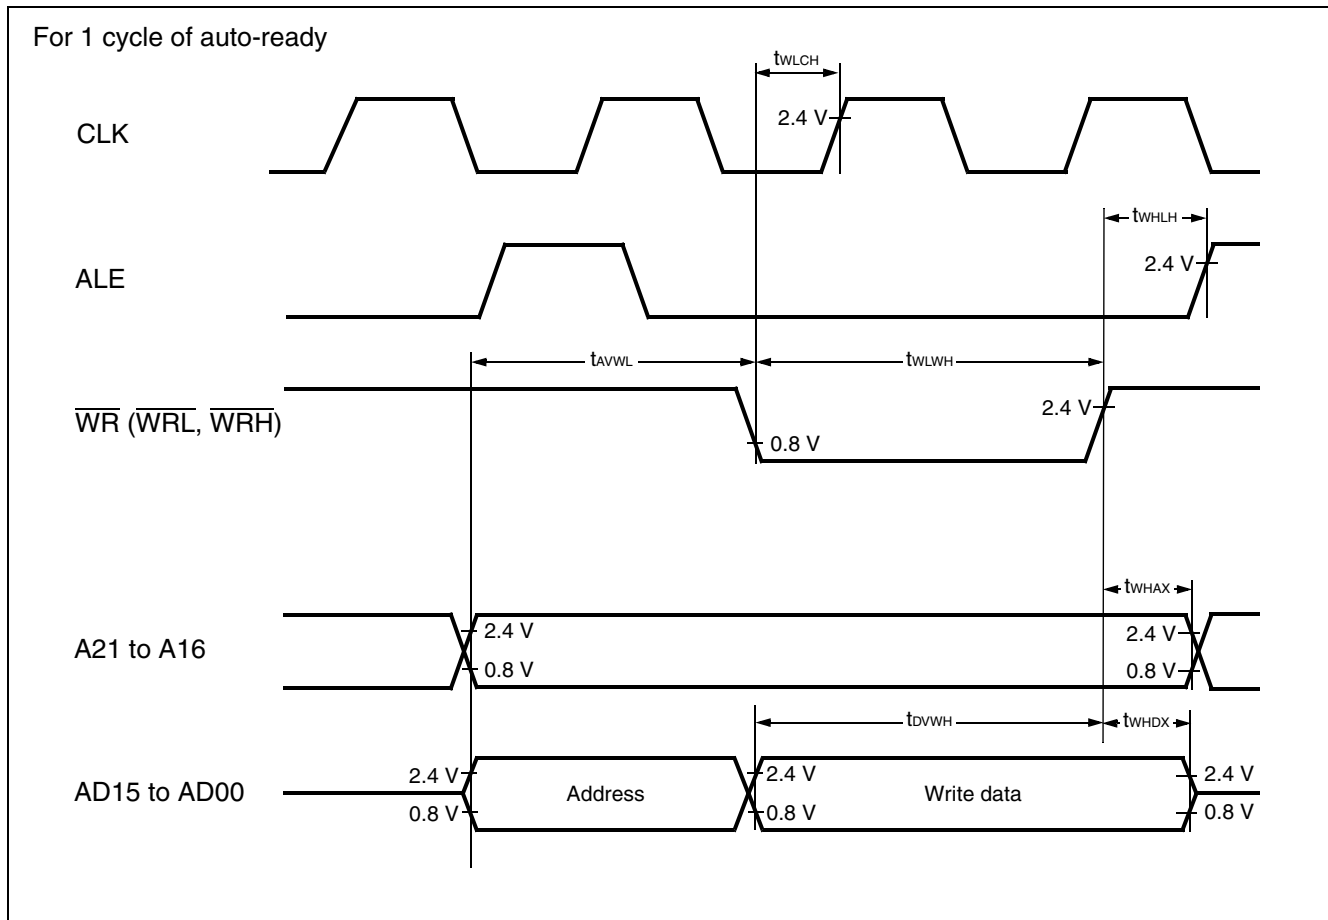


## (7) Ready Input Timing

( $T_A = -40^\circ\text{C}$  to  $+105^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

Parameter	Symbol	Pin	Condition	Value		Units	Remarks
				Min	Max		
RDY set-up time	$t_{RYHS}$	RDY	—	45	—	ns	$f_{CP} = 16\text{ MHz}$
				32	—	ns	$f_{CP} = 24\text{ MHz}$
RDY hold time	$t_{RYHH}$	RDY		0	—	ns	

Note : If the RDY set-up time is insufficient, use the auto-ready function.

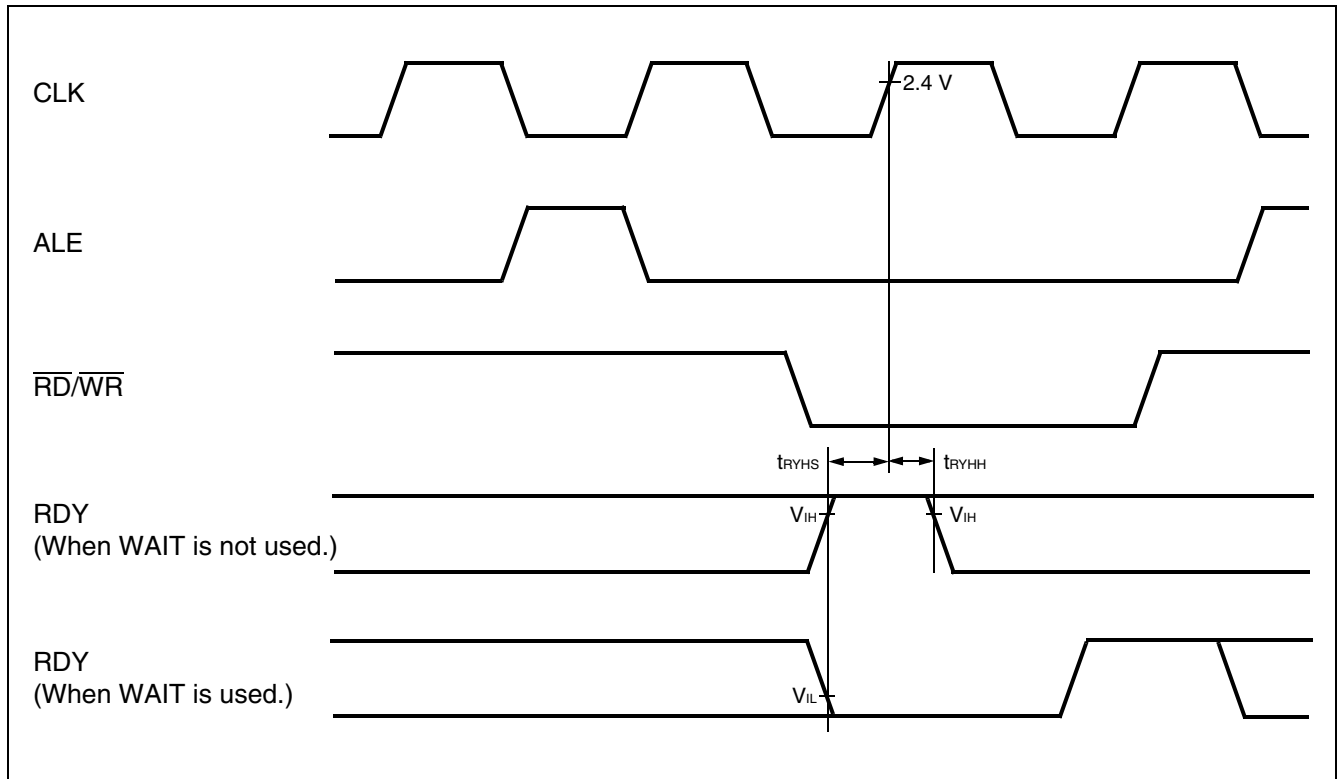


# MB90350E Series

## (8) Hold Timing

( $T_A = -40^\circ\text{C}$  to  $+105^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

Parameter	Symbol	Pin	Condition	Value		Units
				Min	Max	
Pin floating $\rightarrow \overline{\text{HAK}} \downarrow$ time	$t_{\text{XHAL}}$	$\overline{\text{HAK}}$	—	30	$t_{\text{CP}}$	ns
$\overline{\text{HAK}} \uparrow$ time $\rightarrow$ Pin valid time	$t_{\text{HAHV}}$	$\overline{\text{HAK}}$		$t_{\text{CP}}$	$2 t_{\text{CP}}$	ns

Note : There is more than 1 machine cycle from when HRQ pin reads in until the  $\overline{\text{HAK}}$  is changed.

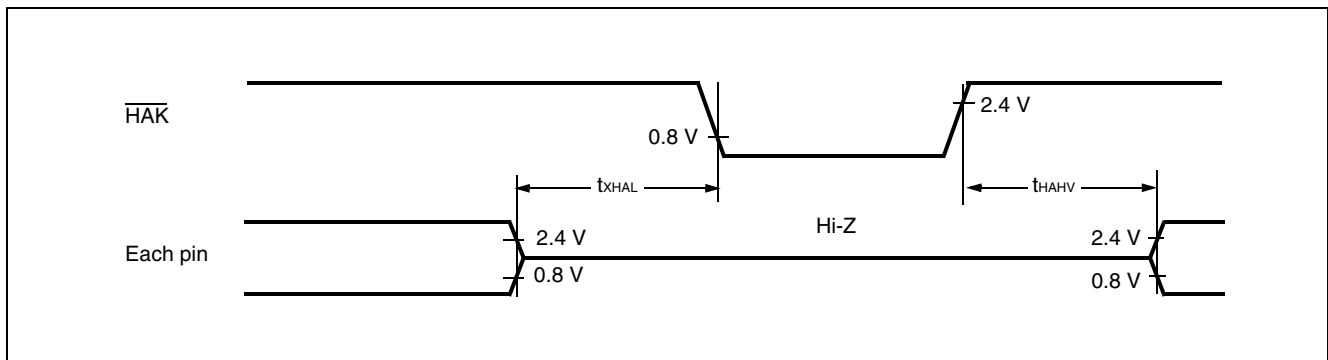

## (9) UART 2/3


( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value		Unit
				Min	Max	
Serial clock cycle time	$t_{SCYC}$	SCK2, SCK3	Internal shift clock mode output pins are $C_L = 80\text{ pF} + 1\text{ TTL}$	$8\ t_{CP}^*$	—	ns
SCK ↓ → SOT delay time	$t_{SLOV}$	SCK2, SCK3, SOT2, SOT3		-80	+80	ns
Valid SIN → SCK ↑	$t_{IVSH}$	SCK2, SCK3, SIN2, SIN3		100	—	ns
SCK ↑ → Valid SIN hold time	$t_{SHIX}$	SCK2, SCK3, SIN2, SIN3		60	—	ns
Serial clock "H" pulse width	$t_{SHSL}$	SCK2, SCK3	External shift clock mode output pins are $C_L = 80\text{ pF} + 1\text{ TTL}$	$4\ t_{CP}$	—	ns
Serial clock "L" pulse width	$t_{LSLH}$	SCK2, SCK3		$4\ t_{CP}$	—	ns
SCK ↓ → SOT delay time	$t_{SLOV}$	SCK2, SCK3, SOT2, SOT3		—	150	ns
Valid SIN → SCK ↑	$t_{IVSH}$	SCK2, SCK3, SIN2, SIN3		60	—	ns
SCK ↑ → Valid SIN hold time	$t_{SHIX}$	SCK2, SCK3, SIN2, SIN3		60	—	ns

\* : Refer to "(1) Clock timing" rating for  $t_{CP}$  (internal operating clock cycle time).


Notes : • AC characteristic in CLK synchronous mode.

- $C_L$  is load capacity value of pins when testing.

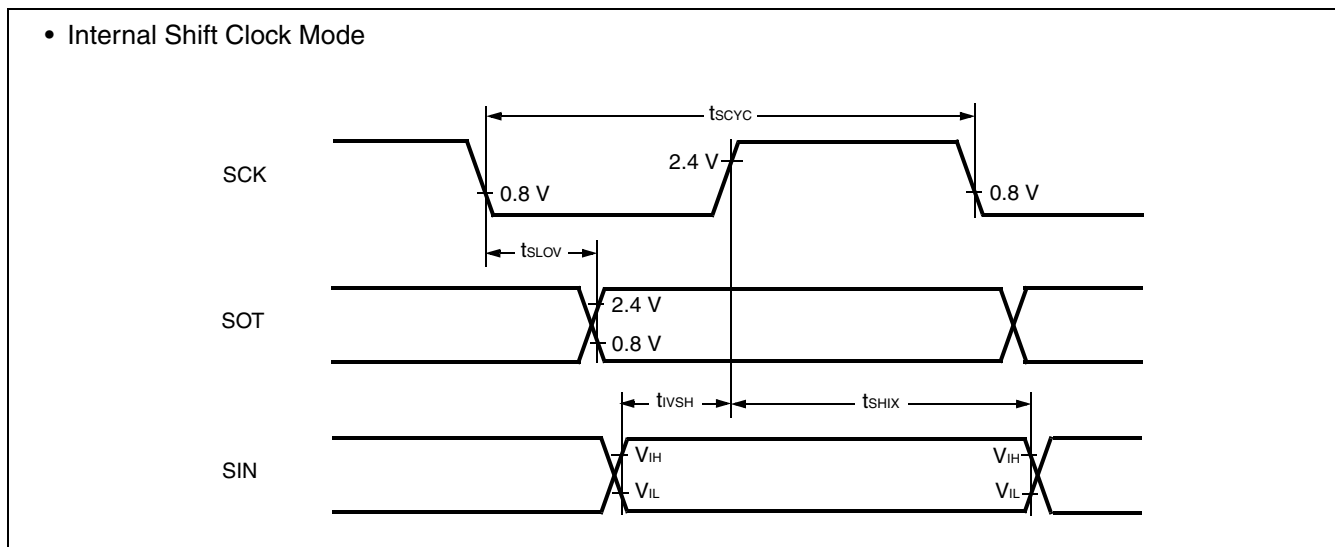

# MB90350E Series

• External Shift Clock Mode

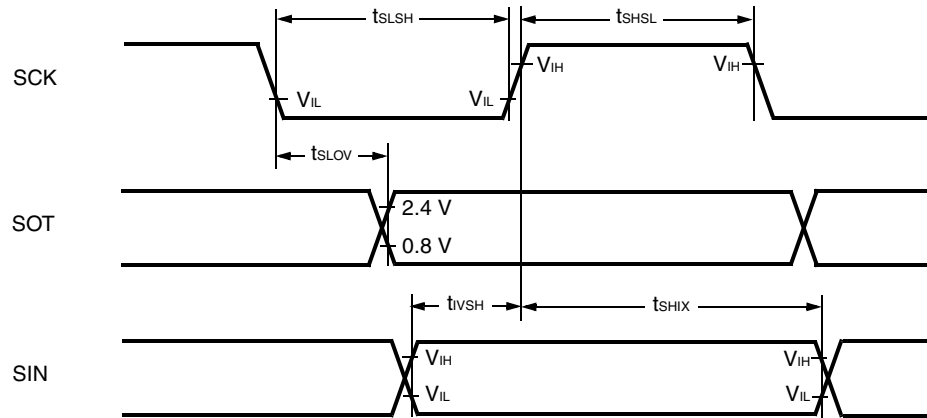

## (10) Trigger Input Timing

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )


Parameter	Symbol	Pin	Condition	Value		Unit
				Min	Max	
Input pulse width	$t_{TRGH}$ $t_{TRGL}$	INT8 to INT15, INT9R to INT11R, ADTG	—	$5 t_{CP}$	—	ns



## (11) Timer Related Resource Input Timing

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )


Parameter	Symbol	Pin	Condition	Value		Unit
				Min	Max	
Input pulse width	$t_{TIWH}$	TIN1, TIN3, IN0, IN1, IN4 to IN7	—	4 $t_{CP}$	—	ns
	$t_{TIWL}$					

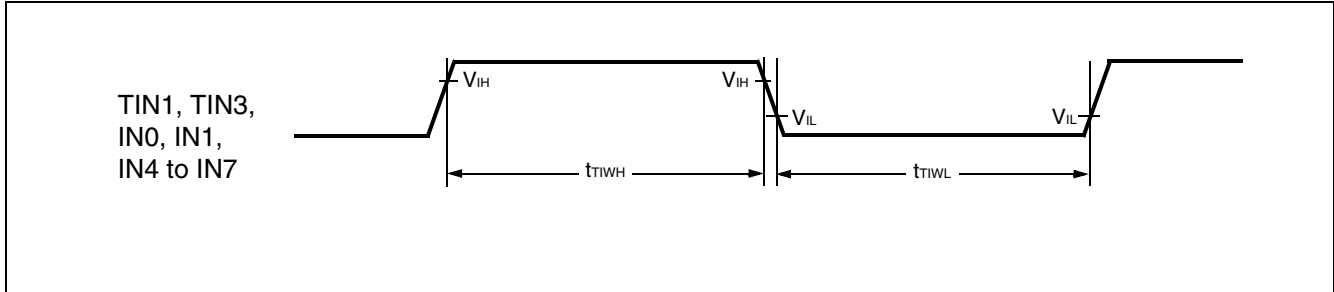

## (12) Timer Related Resource Output Timing

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Condition	Value		Unit
				Min	Max	
CLK $\uparrow$ $\rightarrow$ $T_{OUT}$ change time	$t_{ro}$	TOT1, TOT3, PPG4, PPG6, PPG8 to PPGF	—	30	—	ns

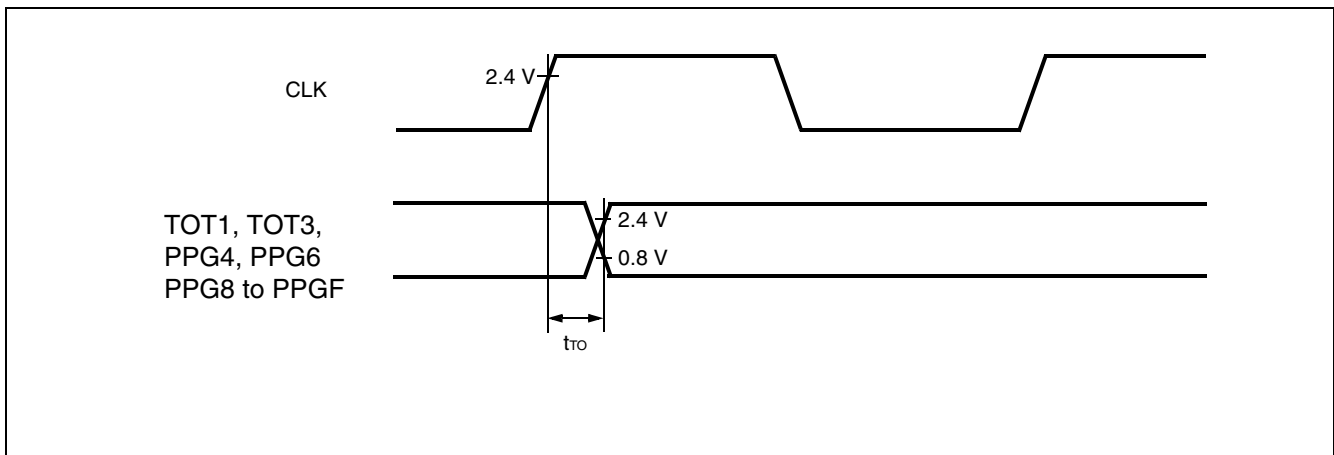

# MB90350E Series

## (13) I<sup>2</sup>C Timing

(T<sub>A</sub> = -40 °C to +125 °C, V<sub>CC</sub> = AV<sub>CC</sub> = 5.0 V ± 10%, f<sub>CP</sub> ≤ 24 MHz, V<sub>SS</sub> = AV<sub>SS</sub> = 0 V)

Parameter	Symbol	Condition	Standard-mode		Fast-mode*4		Unit
			Min	Max	Min	Max	
SCL clock frequency	f <sub>SCL</sub>	R = 1.7 kΩ, C = 50 pF*1	0	100	0	400	kHz
Hold time for (repeated) START condition SDA ↓ → SCL ↓	t <sub>HDSTA</sub>		4.0	—	0.6	—	μs
“L” width of the SCL clock	t <sub>LOW</sub>		4.7	—	1.3	—	μs
“H” width of the SCL clock	t <sub>HIGH</sub>		4.0	—	0.6	—	μs
Set-up time for a repeated START condition SCL ↑ → SDA ↓	t <sub>SUSTA</sub>		4.7	—	0.6	—	μs
Data hold time SCL ↓ → SDA ↓ ↑	t <sub>HDDAT</sub>		0	3.45*2	0	0.9*3	μs
Data set-up time SDA ↓ ↑ → SCL ↑	t <sub>SUDAT</sub>		250*5	—	100*5	—	ns
Set-up time for STOP condition SCL ↑ → SDA ↑	t <sub>SUSTO</sub>		4.0	—	0.6	—	μs
Bus free time between STOP condition and START condition	t <sub>BUS</sub>	4.7	—	1.3	—	μs	

\*1 : R,C : Pull-up resistor and load capacitor of the SCL and SDA lines.


\*2 : The maximum t<sub>HDDAT</sub> has to meet at least that the device does not exceed the “L” width (t<sub>LOW</sub>) of the SCL signal.

\*3 : A Fast-mode I<sup>2</sup>C -bus device can be used in a Standard-mode I<sup>2</sup>C-bus system, but the requirement t<sub>SUDAT</sub> ≥ 250 ns must be met.

\*4 : For use at over 100 kHz, set the machine clock to at least 6 MHz.

\*5 : Refer to “• Note of SDA, SCL set-up time”.


### • Note of SDA, SCL set-up time

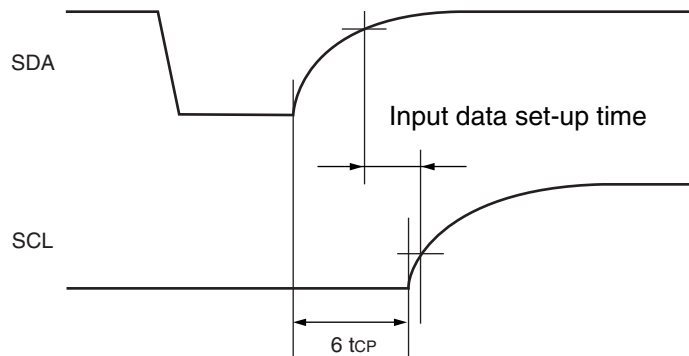



Note : The rating of the input data set-up time in the device connected to the bus cannot be satisfied depending on the load capacitance or pull-up resistor.  
Be sure to adjust the pull-up resistor of SDA and SCL if the rating of the input data set-up time cannot be satisfied.

- Timing definition

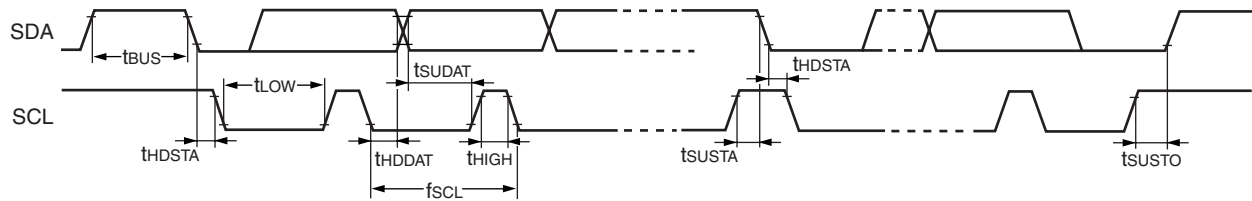

# MB90350E Series

## 5. A/D Converter

( $T_A = -40\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$ ,  $3.0\text{ V} \leq AV_{RH}$ ,  $V_{CC} = AV_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	—	—	—	—	10	bit	
Total error	—	—	—	—	$\pm 3.0$	LSB	
Nonlinearity error	—	—	—	—	$\pm 2.5$	LSB	
Differential nonlinearity error	—	—	—	—	$\pm 1.9$	LSB	
Zero reading voltage	$V_{OT}$	AN0 to AN14	$AV_{SS} - 1.5$	$AV_{SS} + 0.5$	$AV_{SS} + 2.5$	V	
Full scale reading voltage	$V_{FST}$	AN0 to AN14	$AV_{RH} - 3.5$	$AV_{RH} - 1.5$	$AV_{RH} + 0.5$	V	
Compare time	—	—	1.0	—	16500	$\mu\text{s}$	$4.5\text{ V} \leq AV_{CC} \leq 5.5\text{ V}$
			2.0				$4.0\text{ V} \leq AV_{CC} < 4.5\text{ V}$
Sampling time	—	—	0.5	—	$\infty$	$\mu\text{s}$	$4.5\text{ V} \leq AV_{CC} \leq 5.5\text{ V}$
			1.2				$4.0\text{ V} \leq AV_{CC} < 4.5\text{ V}$
Analog port input current	$I_{AIN}$	AN0 to AN14	- 0.3	—	+ 0.3	$\mu\text{A}$	
Analog input voltage range	$V_{AIN}$	AN0 to AN14	$AV_{SS}$	—	$AV_{RH}$	V	
Reference voltage range	—	$AV_{RH}$	$AV_{SS} + 2.7$	—	$AV_{CC}$	V	
Power supply current	$I_A$	$AV_{CC}$	—	3.5	7.5	mA	
	$I_{AH}$	$AV_{CC}$	—	—	5	$\mu\text{A}$	*
Reference voltage supply current	$I_R$	$AV_{RH}$	—	600	900	$\mu\text{A}$	
	$I_{RH}$	$AV_{RH}$	—	—	5	$\mu\text{A}$	*
Offset between channels	—	AN0 to AN14	—	—	4	LSB	


\* : If A/D converter is not operating, a current when CPU is stopped is applicable ( $V_{CC} = AV_{CC} = AV_{RH} = 5.0\text{ V}$ ) .

## Notes on A/D Converter Section

### • About the external impedance of the analog input and its sampling time

A/D converter with sample and hold circuit. If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the internal sample and hold capacitor is insufficient, adversely affecting A/D conversion precision. Therefore to satisfy the A/D conversion precision standard, consider the relationship between the external impedance and minimum sampling time and either adjust the register value and operating frequency or decrease the external impedance so that the sampling time is longer than the minimum value. Also if the sampling time cannot be sufficient, connect a capacitor of about 0.1  $\mu\text{F}$  to the analog input pin.

· Analog input equivalence circuit

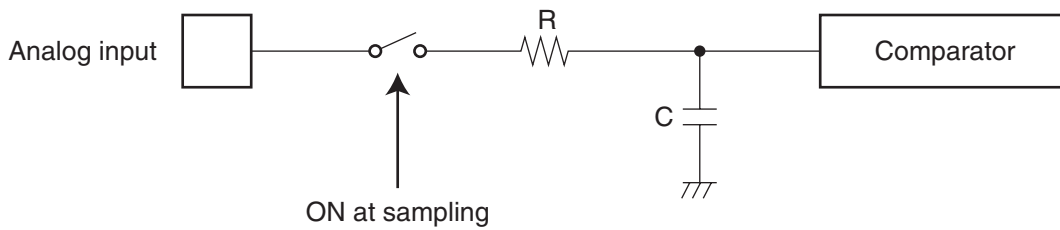

MB90F351E(S), MB90F352E(S), MB90F356E(S), MB90F357E(S),  
 MB90F351TE(S), MB90F352TE(S), MB90F356TE(S), MB90F357TE(S)

	R	C
$4.5 \text{ V} \leq AV_{CC} \leq 5.5 \text{ V}$	2.0 k $\Omega$ (Max)	16.0 pF (Max)
$4.0 \text{ V} \leq AV_{CC} \leq 4.5 \text{ V}$	8.2 k $\Omega$ (Max)	16.0 pF (Max)

MB90V340E-101/102/103/104,  
 MB90351E(S), MB90352E(S), MB90356E(S), MB90357E(S),  
 MB90351TE(S), MB90352TE(S), MB90356TE(S), MB90357TE(S)

	R	C
$4.5 \text{ V} \leq AV_{CC} \leq 5.5 \text{ V}$	2.0 k $\Omega$ (Max)	14.4 pF (Max)
$4.0 \text{ V} \leq AV_{CC} \leq 4.5 \text{ V}$	8.2 k $\Omega$ (Max)	14.4 pF (Max)



Note : The value is reference value.

# MB90350E Series

- Flash memory device

· Relation between External impedance and minimum sampling time



(MB90F351E(S), MB90F352E(S), MB90F356E(S), MB90F357E(S),  
MB90F351TE(S), MB90F352TE(S), MB90F356TE(S), MB90F357TE(S))

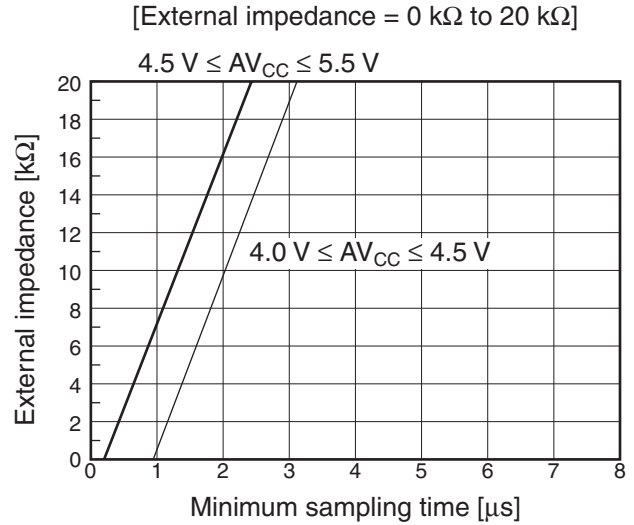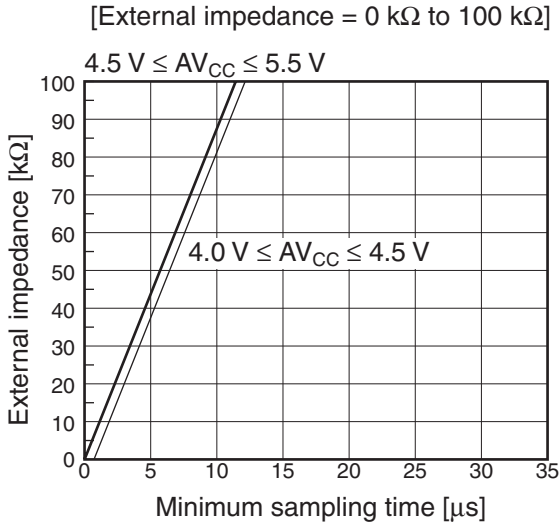

- MASK ROM device

· Relation between External impedance and minimum sampling time

(MB90V340E-101/102/103/104,  
MB90351E(S), MB90352E(S), MB90356E(S), MB90357E(S),  
MB90351TE(S), MB90352TE(S), MB90356TE(S), MB90357TE(S))

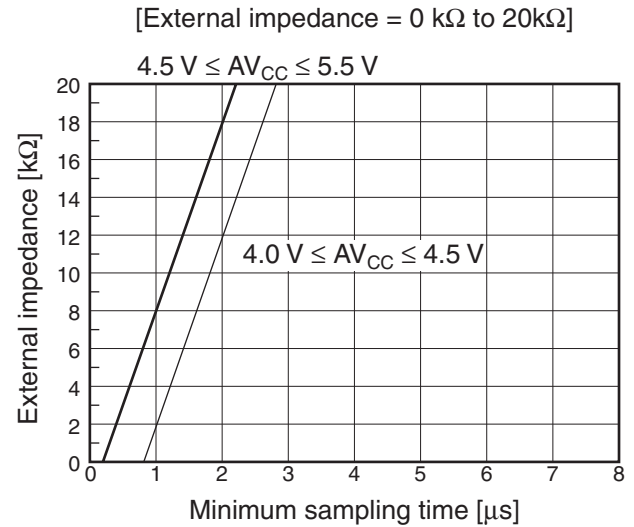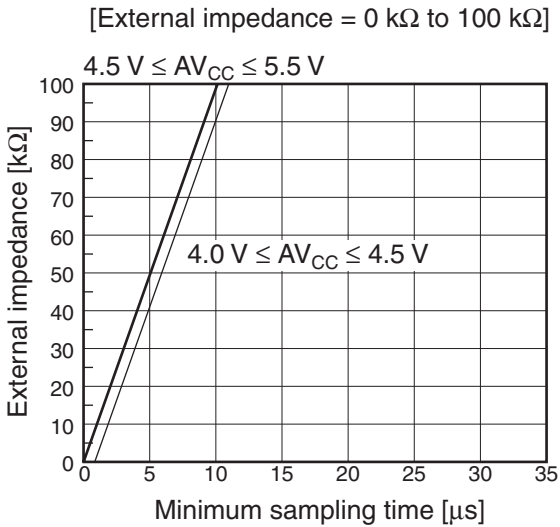


- About the error

Values of relative errors grow larger, as  $|AV_{RH} - AV_{SSL}|$  becomes smaller.

## 6. Definition of A/D Converter Terms

- Resolution : Analog variation that is recognized by an A/D converter.
- Non linearity error : Deviation between a line across zero-transition line ( “00 0000 0000” ← → “00 0000 0001” ) and full-scale transition line ( “11 1111 1110” ← → “11 1111 1111” ) and actual conversion characteristics.
- Differential linearity error : Deviation of input voltage, which is required for changing output code by 1 LSB, from an ideal value.
- Total error : Difference between an actual value and a theoretical value. A total error includes zero transition error, full-scale transition error, and linear error.

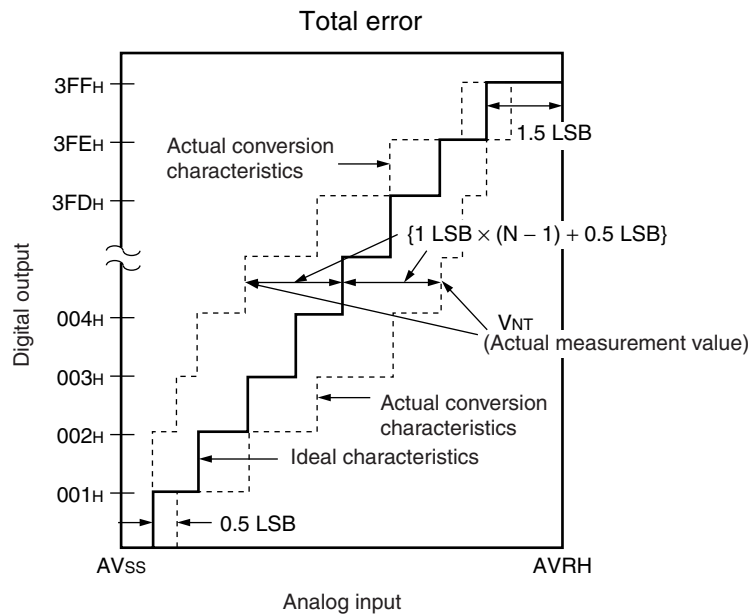

$$\text{Total error of digital output "N"} = \frac{V_{NT} - \{1 \text{ LSB} \times (N - 1) + 0.5 \text{ LSB}\}}{1 \text{ LSB}} \text{ [LSB]}$$

$$1 \text{ LSB (Ideal value)} = \frac{AVRH - AVSS}{1024} \text{ [V]}$$

N : A/D converter digital output value

$V_{OT}$  (Ideal value) =  $AVSS + 0.5 \text{ LSB}$  [V]



$V_{FST}$  (Ideal value) =  $AVRH - 1.5 \text{ LSB}$  [V]

$V_{NT}$  : A voltage at which digital output transits from (N - 1) to N.

(Continued)

# MB90350E Series

(Continued)

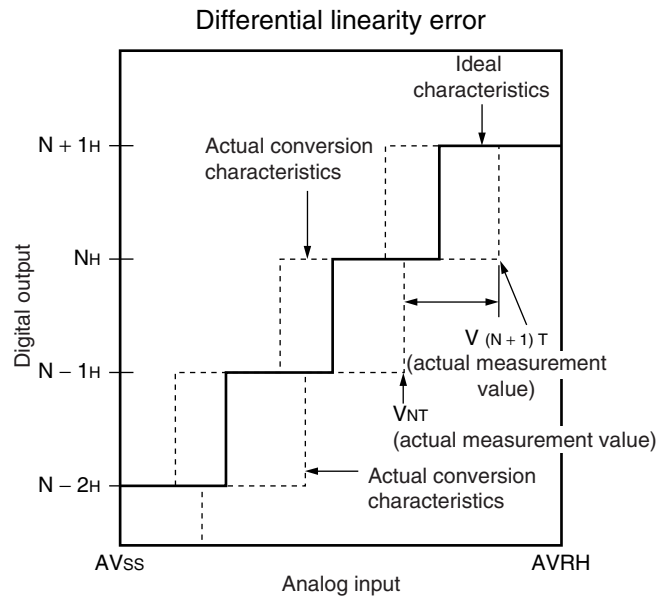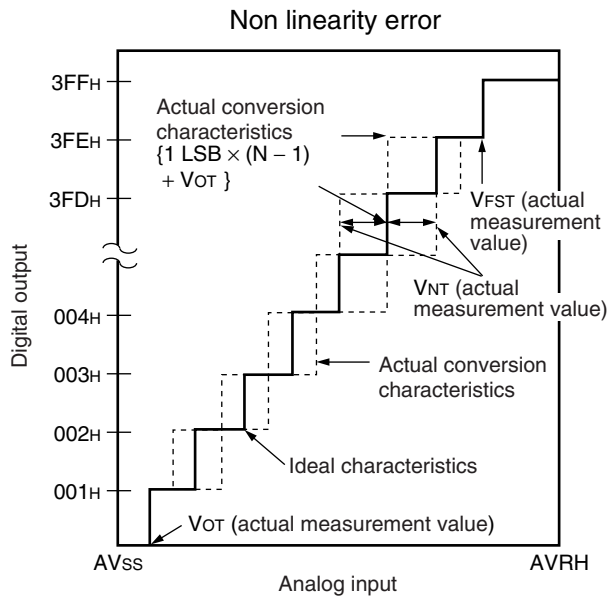

$$\text{Non linearity error of digital output } N = \frac{V_{NT} - \{1 \text{ LSB} \times (N - 1) + V_{OT}\}}{1 \text{ LSB}} \text{ [LSB]}$$

$$\text{Differential linearity error of digital output } N = \frac{V_{(N+1)T} - V_{NT}}{1 \text{ LSB}} - 1 \text{ LSB [LSB]}$$

$$1 \text{ LSB} = \frac{V_{FST} - V_{OT}}{1022} \text{ [V]}$$

N : A/D converter digital output value

V<sub>OT</sub> : Voltage at which digital output transits from "000<sub>H</sub>" to "001<sub>H</sub>".

V<sub>FST</sub> : Voltage at which digital output transits from "3FE<sub>H</sub>" to "3FF<sub>H</sub>".

## 7. Flash Memory Program/Erase Characteristics

- Dual Operation Flash Memory

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Sector erase time (4 Kbytes sector)	T <sub>A</sub> = +25 °C V <sub>CC</sub> = 5.0 V	—	0.2	0.5	s	Excludes programming prior to erasure
Sector erase time (16 Kbytes sector)		—	0.5	7.5	s	Excludes programming prior to erasure
Chip erase time		—	4.6	—	s	Excludes programming prior to erasure
Word (16-bit width) programming time		—	64	3600	μs	Except for the overhead time of the system level
Program/Erase cycle	—	10000	—	—	cycle	
Flash memory Data Retention Time	Average T <sub>A</sub> = +85 °C	20	—	—	year	*

\* : Corresponding value comes from the technology reliability evaluation result.

(Using Arrhenius equation to translate high temperature measurements test result into normalized value at +85 °C)

# MB90350E Series

## ■ ORDERING INFORMATION

Part number	Package	Remarks
MB90F351EPMC	64-pin plastic LQFP FPT-64P-M23 12.0 mm □, 0.65 mm pitch	Dual operation Flash memory products (64 Kbytes)
MB90F351ESPMC		
MB90F351TEPMC		
MB90F351TESPMC		
MB90F356EPMC		
MB90F356ESPMC		
MB90F356TEPMC		
MB90F356TESPMC		
MB90F352EPMC	64-pin plastic LQFP FPT-64P-M23 12.0 mm □, 0.65 mm pitch	Dual operation Flash memory products (128 Kbytes)
MB90F352ESPMC		
MB90F352TEPMC		
MB90F352TESPMC		
MB90F357EPMC		
MB90F357ESPMC		
MB90F357TEPMC		
MB90F357TESPMC		
MB90351EPMC	64-pin plastic LQFP FPT-64P-M23 12.0 mm □, 0.65 mm pitch	MASK ROM products (64 Kbytes)
MB90351ESPMC		
MB90351TEPMC		
MB90351TESPMC		
MB90356EPMC		
MB90356ESPMC		
MB90356TEPMC		
MB90356TESPMC		
MB90352EPMC	64-pin plastic LQFP FPT-64P-M23 12.0 mm □, 0.65 mm pitch	MASK ROM products (128 Kbytes)
MB90352ESPMC		
MB90352TEPMC		
MB90352TESPMC		
MB90357EPMC		
MB90357ESPMC		
MB90357TEPMC		
MB90357TESPMC		

(Continued)




# MB90350E Series


(Continued)

Part number	Package	Remarks
MB90F351EPMC1	64-pin plastic LQFP FPT-64P-M24 10.0 mm □, 0.50 mm pitch	Dual operation Flash memory products (64 Kbytes)
MB90F351ESPMC1		
MB90F351TEPMC1		
MB90F351TESPMC1		
MB90F356EPMC1		
MB90F356ESPMC1		
MB90F356TEPMC1		
MB90F356TESPMC1		
MB90F352EPMC1	64-pin plastic LQFP FPT-64P-M24 10.0 mm □, 0.50 mm pitch	Dual operation Flash memory products (128 Kbytes)
MB90F352ESPMC1		
MB90F352TEPMC1		
MB90F352TESPMC1		
MB90F357EPMC1		
MB90F357ESPMC1		
MB90F357TEPMC1		
MB90F357TESPMC1		
MB90351EPMC1	64-pin plastic LQFP FPT-64P-M24 10.0 mm □, 0.50 mm pitch	MASK ROM products (64 Kbytes)
MB90351ESPMC1		
MB90351TEPMC1		
MB90351TESPMC1		
MB90356EPMC1		
MB90356ESPMC1		
MB90356TEPMC1		
MB90356TESPMC1		
MB90352EPMC1	64-pin plastic LQFP FPT-64P-M24 10.0 mm □, 0.50 mm pitch	MASK ROM products (128 Kbytes)
MB90352ESPMC1		
MB90352TEPMC1		
MB90352TESPMC1		
MB90357EPMC1		
MB90357ESPMC1		
MB90357TEPMC1		
MB90357TESPMC1		
MB90V340E-101	299-pin ceramic PGA PGA-299C-A01	Device for evaluation
MB90V340E-102		
MB90V340E-103		
MB90V340E-104		

# MB90350E Series

## PACKAGE DIMENSIONS
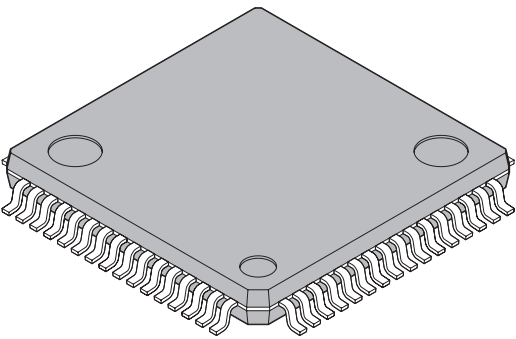
<p>64-pin plastic LQFP</p>  <p>(FPT-64P-M23)</p>	Lead pitch	0.65 mm
	Package width × package length	12.0 × 12.0 mm
	Lead shape	Gullwing
	Sealing method	Plastic mold
	Mounting height	1.70 mm MAX
	Code (Reference)	P-LFQFP64-12×12-0.65

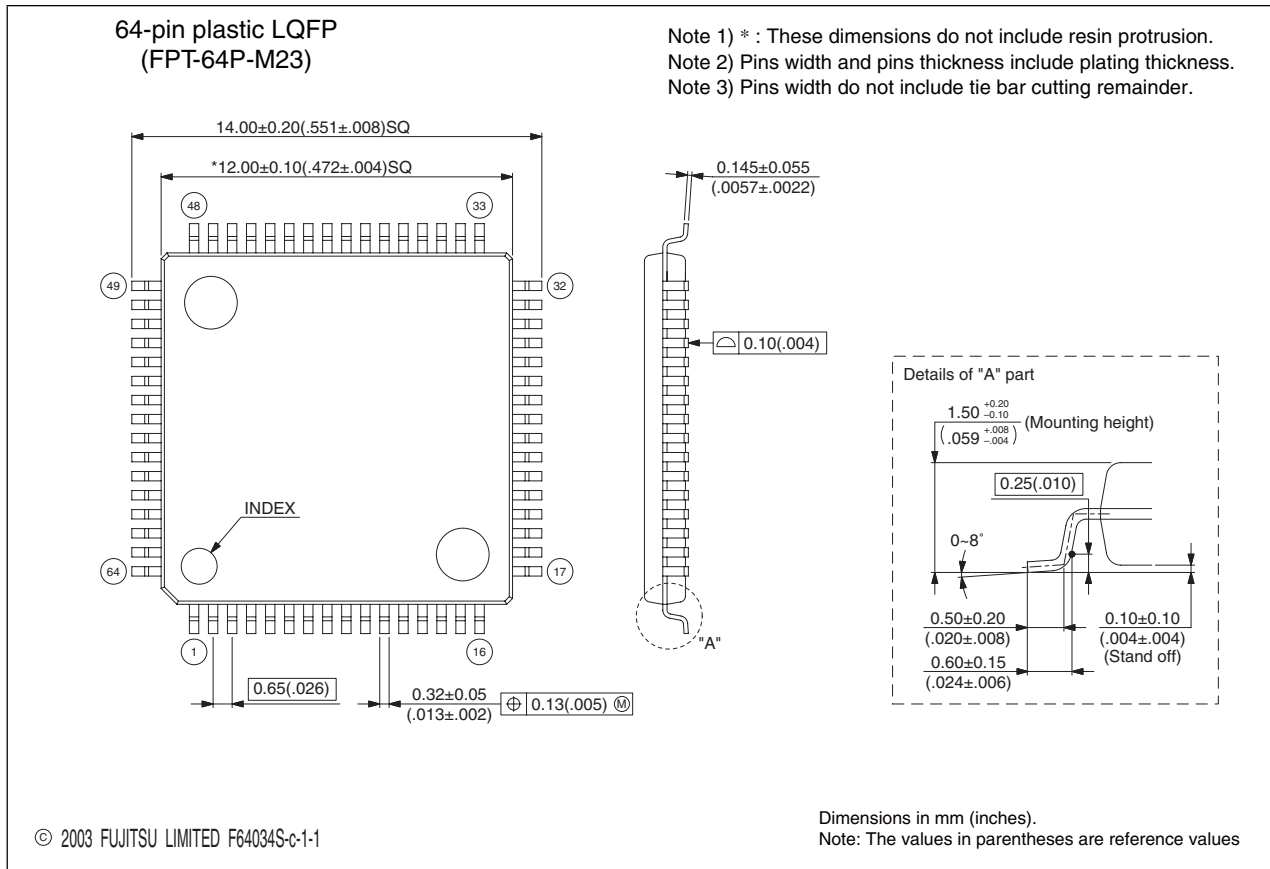



Please confirm the latest Package dimension by following URL.  
<http://edevic.fujitsu.com/fj/DATASHEET/ef-ovpklv.html>

(Continued)

# MB90350E Series

(Continued)
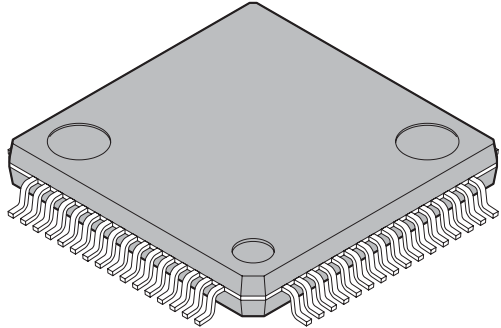
<p>64-pin plastic LQFP</p>  <p>(FPT-64P-M24)</p>	Lead pitch	0.50 mm
	Package width × package length	10.0 × 10.0 mm
	Lead shape	Gullwing
	Sealing method	Plastic mold
	Mounting height	1.70 mm MAX
	Weight	0.32g
	Code (Reference)	P-LFQFP64-10×10-0.50

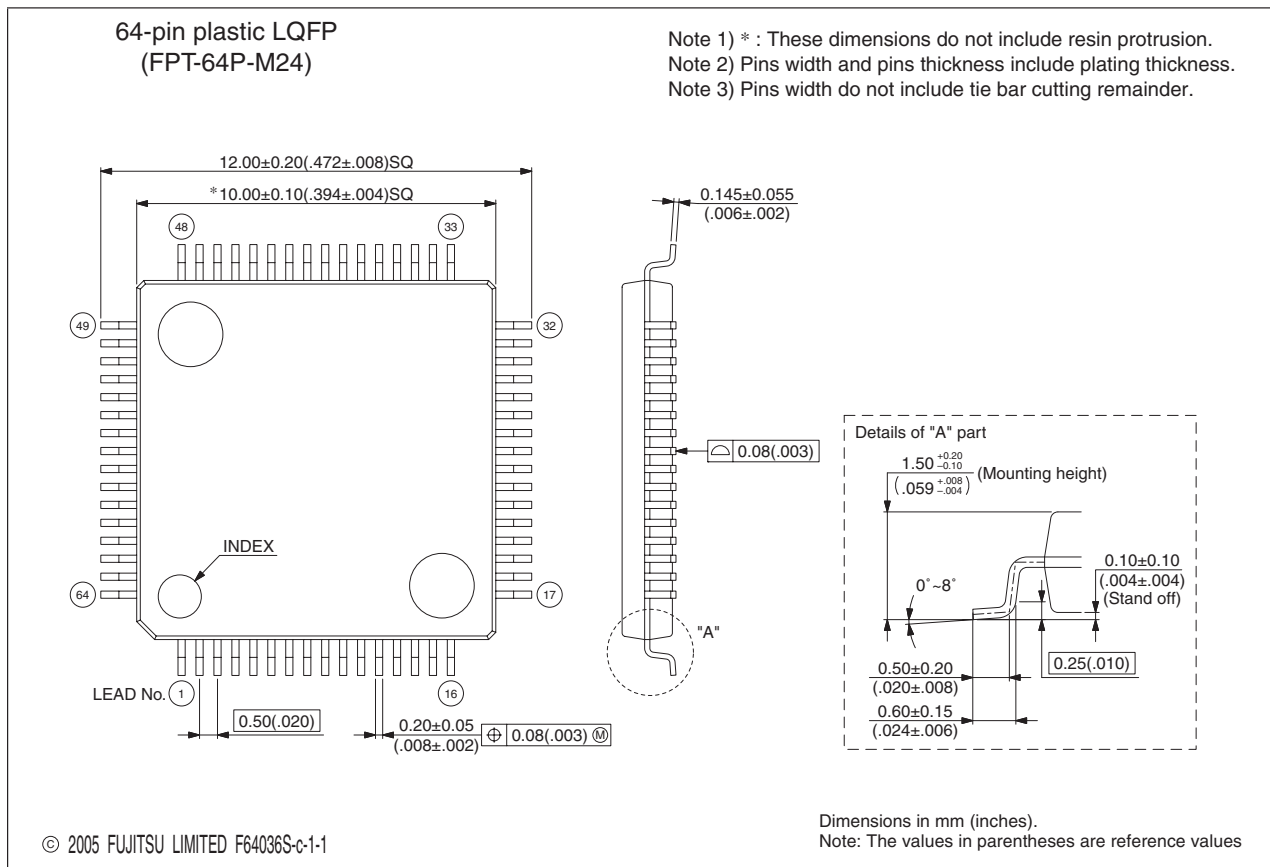

Please confirm the latest Package dimension by following URL.  
<http://edevic.fujitsu.com/fj/DATASHEET/ef-ovpkv.html>

# MB90350E Series

## ■ MAIN CHANGES IN THIS EDITION

Page	Section	Change Results
—	—	Added the following part numbers. MB90356E(S)/TE(S), MB90F356E(S)/TE(S), MB90357E(S)/TE(S), MB90F357E(S)/TE(S), MB90V340E-103/104)
1	■DESCRIPTION	Added a description of the "Clock supervisor".
2	■FEATURES	Added a description of the "Clock supervisor".
13	■PACKAGES AND PRODUCT CORRESPONDENCE	Changed the description of "FPT-64P-M24" as follows: ○* → ○
		Removed the table footnote "*" : This device is under development."
27	■HANDLING DEVICES	Added section "19.Internal CR oscillation circuit".
40	■ I/O MAP	Added the "Clock supervisor Control Register".
56	■ELECTRICAL CHARACTERISTICS 3. DC Characteristics	Added the ratings for the "Clock supervisor" to the "I <sub>CC</sub> L" section of the power supply current ratings.
57		Added the ratings for the "Clock supervisor" to the "I <sub>CC</sub> LS" section of the power supply current ratings.
58		Added the ratings for the "Clock supervisor" to the "I <sub>CC</sub> T" section of the power supply current ratings.
81	■ORDERING INFORMATION	Removed the footnote asterisks from the "Dual operation Flash memory products*" and "MASK ROM products*" of the "FPT-64P-M24" package.
		Removed the table footnote "*" : This device is under development."

The vertical lines marked in the left side of the page show the changes.

# MB90350E Series

The information for microcontroller supports is shown in the following homepage.  
<http://www.fujitsu.com/global/services/microelectronics/product/micom/support/index.html>

## FUJITSU LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of Fujitsu semiconductor device; Fujitsu does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information. Fujitsu assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of Fujitsu or any third party or does Fujitsu warrant non-infringement of any third-party's intellectual property right or other right by using such information. Fujitsu assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.

The company names and brand names herein are the trademarks or registered trademarks of their respective owners.

Edited Business Promotion Dept.