


9050 SERIES

| Miller Number | L Min. μH | Q Min. @ L Min. | Test Freq. MHz | L Max. μH | Q Min. @ L Max. | Test Freq. MHz | Fo Min.* MHz | R,dc Max. Ohms | I,dc Max. mA |
|---------------|----------------------|-----------------|----------------|----------------------|-----------------|----------------|--------------|----------------|--------------|
| 9050 | 1.5 | 40 | 7.9 | 3 | 41 | 7.9 | 39 | .66 | 80 |
| 9051 | 3 | 46 | 7.9 | 7 | 45 | 7.9 | 23 | .85 | 125 |
| 9052 | 7 | 40 | 7.9 | 14 | 62 | 2.5 | 12 | 1.38 | 80 |
| 9053 | 14 | 48 | 2.5 | 28 | 66 | 2.5 | 7.2 | 2.1 | 80 |
| 9054 | 28 | 48 | 2.5 | 60 | 45 | 2.5 | 4.9 | 3 | 100 |
| 9055 | 60 | 40 | 2.5 | 120 | 69 | .79 | 3.6 | 4 | 100 |
| 9056 | 120 | 52 | .79 | 280 | 68 | .79 | 2.5 | 5.75 | 80 |
| 9057 | 280 | 52 | .79 | 650 | 62 | .79 | 1.7 | 12 | 80 |
| 9058 | 650 | 36 | .79 | 1,300 | 68 | .25 | 1.2 | 15 | 100 |
| 9059 | 1,300 | 43 | .25 | 3,000 | 53 | .25 | .57 | 23 | 100 |
| 9059-1 | 1,800 | 116 | .25 | 2,200 | 129 | .25 | 1.04 | 10 | 141 |
| 9060 | 3,000 | 32 | .25 | 10,000 | 32 | .079 | .48 | 76 | 30 |
| 9061 | 8,000 | 35 | .25 | 20,000 | 38 | .079 | .33 | 110 | 30 |
| 9062 | 15,000 | 25 | .079 | 40,000 | 40 | .079 | .24 | 150 | 30 |
| 9063 | 20,000 | 36 | .079 | 60,000 | 60 | .079 | .09 | 175 | 25 |

* Minimum self resonant frequency measured at maximum inductance.

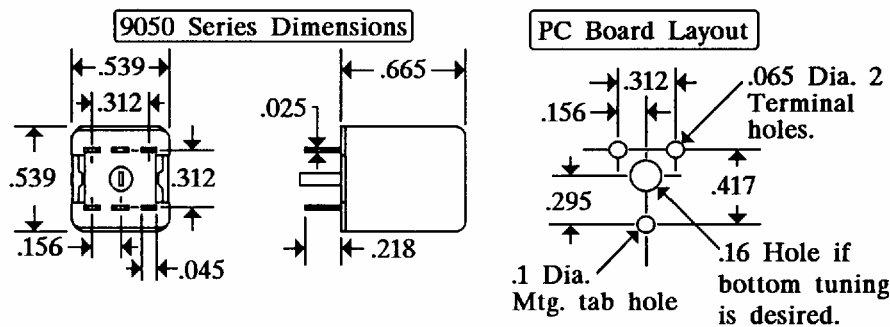

9100 SERIES

| Miller Number | L Min. μH | Q Min. @ L Min. | Test Freq. MHz | L Max. μH | Q Min. @ L Max. | Test Freq. MHz | Fo Min.* MHz | R,dc Max. Ohms | I,dc Max. mA |
|---------------|----------------------|-----------------|----------------|----------------------|-----------------|----------------|--------------|----------------|--------------|
| 9101 | .099 | 64 | 25 | .134 | 85 | 25 | 400 | .01 | 4,850 |
| 9102 | .129 | 70 | 25 | .192 | 93 | 25 | 333 | .01 | 4,430 |
| 9103 | .165 | 77 | 25 | .258 | 100 | 25 | 288 | .02 | 3,970 |
| 9104 | .246 | 83 | 25 | .418 | 102 | 25 | 225 | .02 | 3,830 |
| 9105 | .366 | 88 | 25 | .627 | 93 | 25 | 185 | .02 | 3,430 |
| 9106 | .588 | 40 | 25 | .95 | 60 | 25 | 155 | .9 | 516 |
| 9107 | .83 | 43 | 25 | 1.54 | 50 | 7.9 | 116 | 1.02 | 485 |
| 9108 | 1.44 | 34 | 7.9 | 2.94 | 64 | 7.9 | 84 | 1.38 | 417 |
| 9109 | 2.52 | 40 | 7.9 | 5.7 | 77 | 7.9 | 60 | 1.76 | 368 |
| 9110 | 5.35 | 50 | 7.9 | 13.49 | 60 | 2.5 | 37.4 | 2.92 | 286 |
| 9111 | 12.5 | 31 | 2.5 | 29.45 | 60 | 2.5 | 9.7 | 4.72 | 225 |
| 9112 | 26.25 | 35 | 2.5 | 71.25 | 54 | 2.5 | 5.1 | 6.97 | 185 |
| 9113 | 64.57 | 36 | 2.5 | 163 | 50 | .79 | 3.1 | 9.98 | 155 |
| 9114 | 147 | 31 | .79 | 430 | 52 | .79 | 2.1 | 16.32 | 121 |
| 9115 | 422 | 40 | .79 | 1,100 | 42 | .25 | 1.4 | 27.84 | 92 |
| 9116 | 1,050 | 39 | .79 | 3,740 | 65 | .25 | .88 | 41.06 | 76 |
| 9117 | 3,360 | 40 | .25 | 11,120 | 50 | .079 | .58 | 78.92 | 55 |

* Minimum self resonant frequency measured at maximum inductance.

