
QHM-4R-G Series 90° POWER DIVIDERS / COMBINERS

500 MHz to 26.5 GHz / Multi-Octave Bandwidth / Low Insertion Loss / High Isolation / SMA



PRINCIPAL SPECIFICATIONS								
Model Number	Frequency Range, GHz	Isolation, dB, Min.	Amplitude Balance, dB, Max.	Phase Tolerance, Max.	Insertion Loss, dB, Max.	VSWR, All Ports, Max.	Weight, oz.(g) Nom.	Outline Dwg #
QHM-4R-4.7G	0.5 - 9.0	18	1.0	90° ± 5°	1.3	1.40:1	10.0 (283)	1
QHM-4R-9.5G	1.0 - 18.0	17	1.0	90° ± 10°	1.8	1.35:1	5.0 (142)	2
QHM-4R-10G	2.0 - 18.0	17	1.2	90° ± 7°	1.2	1.40:1	3.5 (99)	3
QHM-4R-11G	4.0 - 18.0	16	0.8	$90^{\circ} \pm 6^{\circ}$	1.0	1.40:1	1.7 (48)	4
QHM-4R-12G	6.0 - 18.0	14	0.8	$90^{\circ} \pm 5^{\circ}$	1.3	1.35:1	1.2 (34)	4*
QHM-4R-14G	2.0 - 26.5	14	1.2	$90^{\circ} \pm 10^{\circ}$	1.8	1.50:1	3.5 (99)	3
QHM-4R-16G	6.0 - 26.5	14	1.3	90° ± 8°	1.2	1.60:1	1.7 (48)́	4*
							*(Special order.

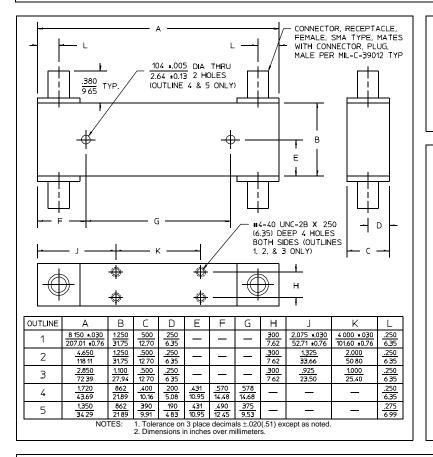

GENERAL SPECIFICATIONS

Coupling:	3 dB nom.		
Impedance:	50 Ω nom.		
CW Input:	1 Watt max.		
Operating Temperature:	– 55° to +85°C		

General Notes:

1. The QHM-4R-G series covers 500 MHz to 26.5 GHz using an advanced stripline design for high isolation and low loss.

2. Signals applied to any port will split equally between the opposite pair with the adjacent port remaining isolated. The phase relationship is 0° to the port directly opposite and -90° to the port on the diagonal.

3. These units comply with MIL-P-23971 and can be supplied screened for compliance with additional specifications for military and space applications requiring the highest reliability.

For further information contact MERRIMAC / 41 Fairfield Pl., West Caldwell, NJ, 07006 / 973-575-1300 / FAX 973-575-0531