

## AWU6602

HELP3<sup>™</sup> Band 2/WCDMA 3.4 V/29 dBm Linear PA Module ADVANCED PRODUCT INFORMATION - Rev 0.4

## **FEATURES**


- HSPA Compliant
- InGaP HBT Technology
- High Efficiency: (R99 waveform)
   39 % @ Pout = +29 dBm
  - 19 % @ Роит = +17 dВm
- Low Quiescent Current: 8 mA
- Low Leakage Current in Shutdown Mode: <1 μA</li>
- · Internal Voltage Regulator
- Integrated "daisy chainable" directional couplers with CPLin and CPLout Ports
- Optimized for a 50  $\Omega$  System
- Low Profile Miniature Surface Mount Package
- RoHS Compliant Package, 260 °C MSL-3

### **APPLICATIONS**

 WCDMA/HSPA PCS-Band Wireless Handsets and Data Devices

### PRODUCT DESCRIPTION

The AWU6602 HELP3<sup>™</sup> PAis a 3rd generation WCDMA product for UMTS handsets. This PA incorporates ANADIGICS' HELP3<sup>™</sup> technology to provide low power consumption without the need for an external voltage regulator. A "daisy chainable" directional coupler is integrated in the module thus eliminating the need of external couplers. The device is manufactured



on an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability, and ruggedness. There are two selectable bias modes that optimize efficiency for different output power levels, and a shutdown mode with low leakage current, which increases handset talk and standby time. The self-contained 3 mm x 3 mm x 1 mm surface mount package incorporates matching networks optimized for output power, efficiency, and linearity in a 50  $\Omega$  system.




Figure 1: Block Diagram

www.DataSheet4U.com

## AWU6602

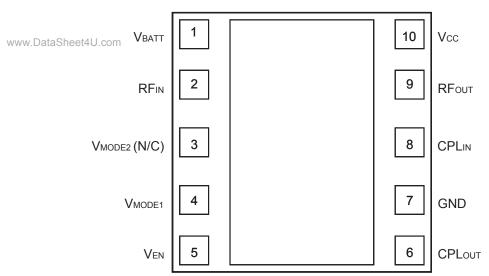


Figure 2: Pinout (X-ray Top View)

**Table 1: Pin Description** 

PIN	NAME	DESCRIPTION					
1	$V_{BATT}$	Battery Voltage					
2	RF⊪	RF Input					
3	V <sub>MODE2</sub> (N/C)	No Connection					
4	V <sub>MODE1</sub>	Mode Control Voltage 1					
5	$V_{EN}$	PA Enable Voltage					
6	CPLout	Coupler Output					
7	GND	Ground					
8	CPLℕ	Coupler Input					
9	RFout	RF Output					
10	Vcc	Supply Voltage					

## **ELECTRICAL CHARACTERISTICS**

www.DataSheet4U.com

**Table 2: Absolute Minimum and Maximum Ratings** 

PARAMETER	MIN	MAX	UNIT
Supply Voltage (Vcc)	0	+5	V
Battery Voltage (VBATT)	0	+6	V
Control Voltages (VMODE1, VENABLE)	0	+3.5	V
RF Input Power (P <sub>IN</sub> )	-	+10	dBm
Storage Temperature (Tstg)	-40	+150	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

**Table 3: Operating Ranges** 

Tuble 0. Operating Nanges						
PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS	
Operating Frequency (f)	1850	ı	1910	MHz		
Supply Voltage (Vcc)	+3.2	+3.4	+4.2	٧	Роит <u>&lt;</u> +29.0 dВm	
Enable Voltage (Venable)	+2.15 0	+2.4	+3.1 +0.5	>	PA "on" PA "shut down"	
Mode Control Voltage (VMODE1)	+2.15 0	+2.4	+3.1 +0.5	<b>V</b>	Low Bias Mode High Bias Mode	
RF Output Power (Pout) R99 WCDMA, HPM HSPA (MPR=0), HPM R99 WCDMA, LPM HSPA (MPR=0), LPM	28.5 <sup>(1)</sup> 27.5 <sup>(1)</sup> 16.5 <sup>(1)</sup> 15.5 <sup>(1)</sup>	29 28 17 16	29 28 17 16	dBm	3GPP TS 34.121-1, Rel 7 Table C.11.1.3	
Case Temperature (Tc)	-30	_	+90	°C		

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

### Notes:

(1) For operation at Vcc = +3.2 V, Pout is derated by 0.5 dB.



## **Table 4: Electrical Specifications**

(T<sub>C</sub> = +25 °C, V<sub>CC</sub> = +3.4 V, V<sub>RATI</sub> = +3.4 V, V<sub>FNARI</sub> = +2.4 V, 50 O system, R99 waveform)

w.DataSheet4U.com		T\/D	MAY		COMMENTS	COMMENTS	
PARAMETER	MIN	TYP	MAX	UNIT	Роит	V <sub>MODE1</sub>	
Gain	23 11.5	26 13.5	29 16.5	dB	+29.0 dBm +17 dBm	0 V 2.4 V	
ACLR1 at 5 MHz offset (1)	-	-41 -42	-38 -38	dBc	+29.0 dBm +17 dBm	0 V 2.4 V	
ACLR2 at 10 MHz offset	-	-52 -55	-48 -48	dBc	+29.0 dBm +17 dBm	0 V 2.4 V	
Power-Added Efficiency (1)	35 15	39 19	-	%	+29.0 dBm +17 dBm	0 V 2.4 V	
Quiescent Current (lcq) Low Bias Mode	-	8	13	mA	V <sub>MODE1</sub> = +2.4 V		
Mode Control Current	-	0.35	0.8	mA	through V <sub>MODE</sub> pin, V <sub>MODE1</sub> = +2.4		
Enable Current	-	0.35	0.8	mA	through Venable pin		
BATT Current	-	2.5	5	mA	through VBATT pin, VMODE1 = +2.4		
Leakage Current	-	<1	5	μΑ	V <sub>BATT</sub> = +4.2 V, V <sub>CC</sub> = +4.2 V, V <sub>ENABLE</sub> = 0 V, V <sub>MODE1</sub> = 0 V		
Noise in Receive Band <sup>(2)</sup>	-	-137	-135	dBm/Hz	Pout <u>&lt;</u> +29.0 dBm, V <sub>MODE1</sub> = 0V		
Noise in Receive Band	-	-140	-138	dBm/Hz	Pout <u>&lt;</u> 17 dBm, V <sub>MODE1</sub> = +2.4 \		
Harmonics 2fo 3fo, 4fo		-42 -46	-35 -35	dBc	Р <sub>оит</sub> <u>&lt;</u> +29.0 dВm		
Input Impedance	-	-	2:1	VSWR			
Coupling Factor	-	20	-	dB			
Directivity	-	20	-	dB			
Spurious Output Level (all spurious outputs)	-	-	-70	dBc	Pout ≤ +29.0 dBm In-band load VSWR < 5:1 Out-of-band load VSWR < 10:1 Applies over all operating conditions		
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Applies over full	operating range	

Notes:

<sup>(1)</sup> ACLR and Efficiency measured at 1880 MHz.

<sup>(2)</sup> Noise measured at 1930 MHz to 1990 MHz.

## **APPLICATION INFORMATION**

www.mo.ensure.phoper-performance, refer to all related Application Notes on the ANADIGICS web site: http://www.anadigics.com

### **Shutdown Mode**

The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to the VENABLE and VMODE1 voltages.

### **Bias Modes**

The power amplifier may be placed in either a Low Bias mode or a High Bias mode by applying the appropriate

logic level (see Operating Ranges table) to V<sub>MODE1</sub>. The Bias Control table lists the recommended modes of operation for various applications. V<sub>MODE2</sub> is not necessary for this PA.

Two operating modes are available to optimize current consumption. High Bias/High Power operating mode is for Pout levels  $\geq$  16 dBm. At around 17 dBm output power, the PA should be "Mode Switched" to Medium/Low power mode for lowest quiescent current consumption.

Table 5: Bias Control (UMTS)

APPLICATION	Pout LEVELS	BIAS MODE	Venable	V <sub>MODE1</sub>	Vcc	<b>V</b> BATT
UMTS - med/low power (Low Bias Mode)	<u>&lt;</u> +17 dBm	Low	+2.4 V	+2.4 V	3.2 - 4.2 V	≥ 3.2 V
UMTS - high power (High Bias Mode)	> +16 dBm	High	+2.4 V	0 V	3.2 - 4.2 V	≥ 3.2 V
Optional lower Vcc in low power mode	<u>&lt;</u> +7 dBm	Low	+2.4 V	+2.4 V	1.5 V	≥ 3.2 V
Shutdown	-	Shutdown	0 V	0 V	3.2 - 4.2 V	≥ 3.2 V


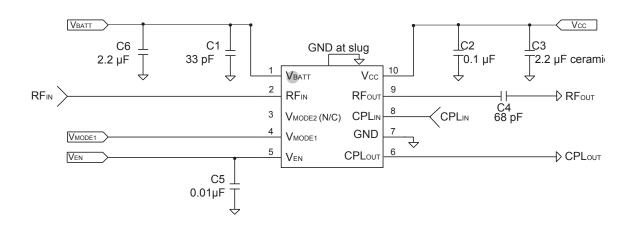


Figure 3: Application Circuit Schematic



### **PACKAGE OUTLINE**

www.DataSheet4U.com

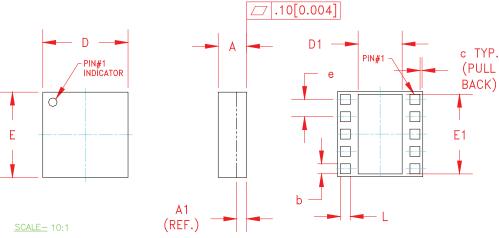

SYMBOL	MI	MILLIMETERS			INCHES		NOTE	
_o_L	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.		
Α	0.91	1.03	1.13	0.035	0.041	0.044	-	
A1	PLEASE REFER TO LAMINATE CONTROL DRAWING							
b	0.32	0.35	0.40	0.013	0.014	0.016	3	
С	-	0.10	-	-	0.004	-	-	
D	2.88	3.00	3.12	0.113	0.118	0.123	-	
D1	1.45	1.50	1.57	0.057	0.059	0.062	3	
Е	2.88	3.00	3.12	0.113	0.118	0.123	-	
E1	2.70	2.75	2.85	0.106	0.108	0.112	3	
е		0.60			0.024		3	
L	0.32	0.35	0.40	0.013	0.014	0.016	3	

### NOTES:

- 1. CONTROLLING DIMENSIONS: MILLIMETERS
- 1. CONTROLLING DIMENSIONS: MILLMEIERS
  2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].
  3. PADS (INCLUDING CENTER) SHOWN UNIFORM SIZE FOR REFERENCE ONLY.
  ACTUAL PAD SIZE AND LOCATION WILL VARY WITHIN MIN. AND MAX. DIMENSIONS ACCORDING TO SPECIFIC LAMINATE DESIGN.
- 4. UNLESS SPECIFIED DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES SHOWN.
- 5. LAMINATE CONTROL DRAWING SPECIFIED BY PART NUMBER.

## Figure 4: M45 Package Outline - 10 Pin 3 mm x 3 mm x 1 mm Surface Mount Module

# TOP BRAND



### NOTES:

1. ANADIGICS LOGO SIZE: NONE 2. PART NUMBER: 6602R

3. WAFER LOT NUMBER: LLLL = FOUR DIGIT LOT NUMBER

NN = TWO DIGIT WAFER NUMBER

4. PIN 1 INDICATOR: LASER DOT **BBB** 5. B.O.M.#

6. COUNTRY CODE: CC = TH -for- THAILAND, TW -for- TAIWAN,

PH -for- PHILLIPINES, CH -for- CHINA, ID -for- INDONESIA, HK -for- HONG KONG


7. TYPE : ARIAL SIZE: 1.5-POINT COLOR: LASER

Figure 5: Branding Specification - M45 Package

www.DataSheet4U.com


### PCB AND STENCIL DESIGN GUIDELINE

www.DataSheet4U.com



### NOTES:

- (1) OUTLINE DRAWING REFERENCE: P8002478 E
- (2) UNLESS SPECIFIED DIMENSIONS
  ARE SYMMETRICAL ABOUT CENTER
  LINES SHOWN.
- (3) DIMENSIONS IN MILLIMETERS.
- (4) VIAS SHOWN IN PCB METAL VIEW ARE FOR REFERENCE ONLY.
  NUMBER & SIZE OF THERMAL VIAS REQUIRED DEPENDENT ON HEAT DISSIPATION REQUIREMENT AND THE PCB PROCESS CAPABILITY.
- (5) RECOMMENDED STENCIL THICKNESS: APPROX. 0.150mm (6 Mils)







Figure 6: Recommended PCB Layout Information

## **COMPONENT PACKAGING**

www.DataSheet4U.com

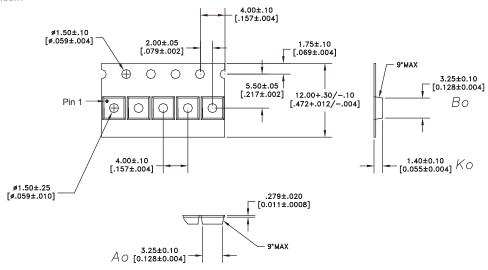

NOTES:

DIMENSIONS ARE IN MILLIMETERS [INCHES]

1. MATERIAL: 3000 (CARBON FILLED POLYCARBONATE) 100% RECYCLABLE.

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

Figure 7: Tape & Reel Packaging

Table 6: Tape & Reel Dimensions

PACKAGE TYPE	TAPE WIDTH	POCKET PITCH	REEL CAPACITY	MAX REEL DIA
3 mm x 3 mm x 1 mm	12 mm	4 mm	2500	7"

### AWU6602

### ORDERING INFORMATION

vw.vc	ORDER NUMBER TEMPERATURE RANGE		PACKAGE DESCRIPTION	COMPONENT PACKAGING
A	AWU6602RM45Q7	-30 °C to +90 °C	RoHS Compliant 10 Pin 3 mm x 3 mm x 1 mm Surface Mount Module	Tape and Reel, 2500 pieces per Reel
Α	AWU6602RM45P9	-30 °C to +90 °C	RoHS Compliant 10 Pin 3 mm x 3 mm x 1 mm Surface Mount Module	Partial Tape and Reel



## ANADIGICS, Inc.

141 Mount Bethel Road Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000 Fax: +1 (908) 668-5132

URL: http://www.anadigics.com E-mail: Mktg@anadigics.com

### **IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

#### WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

www.DataSheet4U.com

