


PACKAGE OUTLINE

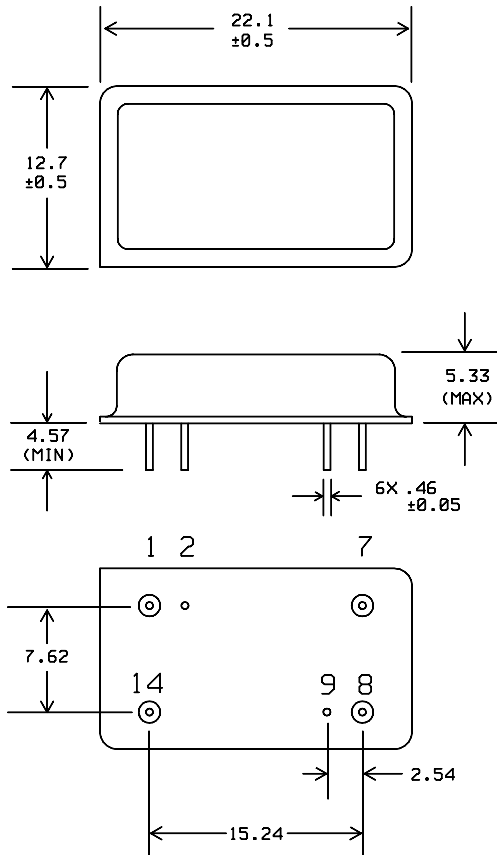


Units: mm

Pin Configuration:

Input:	14
Input Return:	1
Output:	8
Output Return:	7
Ground:	2, 9

MATCHING CIRCUIT

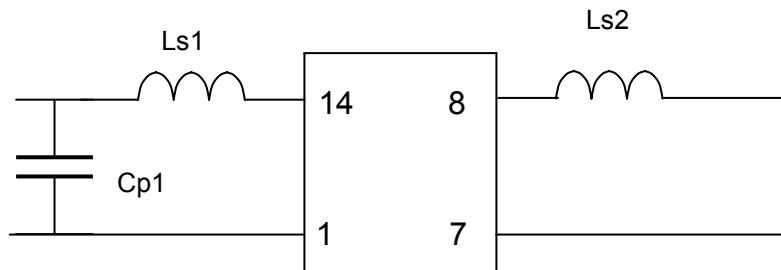

Component values:

$Ls1 = 82$ nH $Ls2 = 83$ nH (Minimum Q = 45)

$Cp1 = 20$ pF

Notes

1. Recommend use of 2% tolerance components.
2. Optimum values depend on board layout. Values intended as guide only.

ISO 9001
Registered

Micro Networks

Worldwide Headquarters: 324 Clark Street Worcester, MA 01606. tel: 508-852-5400 fax: 508-852-8456
European Sales Headquarters: Hertosingel 20 6214 AD Maastricht, Netherlands. tel: +31-43-32-70912 fax: +31-43-32-70715
www.micronetworks.com