

## **WRD-YD-3W Series**

#### 3W. WIDE INPUT ISOLATED & REGULATED TWIN OUTPUT DIP DC-DC CONVERTER



- ◆2:1 wide input voltage range
- ◆Twin output
- ◆Operating temperature: -40°C to + 85°C
- ◆UL94-V0 package
- ◆No external component required
- ◆Industry standard pinout
- Short circuit protection(automatic recovery)
- Five-sided metal shielding(WRD-YD)
- ◆ MTBF>1,000,000 hours
- No heat sink required
- ◆ RoHS Compliance

<b>.</b> .	Input				Output			
Part Number	Voltage(VDC)			No-load	Voltage	Current(MA)		Efficiency (%,Typ)
	Nominal	Range	Max*	Current (mA,Typ)	(VDC)	Max	Min.	(%,Typ)
WRD050505YD-3W	4.5-9.0	4.5-9.0	11	40	5/5	300/300	30/30	68
WRD051212YD-3W	4.5-9.0	4.5-9.0	11	40	12/12	125/125	12/12	71
WRD051515YD-3W	4.5-9.0	4.5-9.0	11	40	15/15	100/100	10/10	72
WRD120505YD-3W	12	9.0-18	22	20	5/5	300/300	30/30	76
WRD120909YD-3W	12	9.0-18	22	20	9/9	166/166	16/16	78
WRD121212YD-3W	12	9.0-18	22	20	12/12	125/125	12/12	80
WRD121515YD-3W	12	9.0-18	22	20	15/15	100/100	10/10	81
WRD122424YD-3W	12	9.0-18	22	20	24/24	62/62	6/6	82
WRD240505YD-3W	24	18-36	40	10	5/5	300/300	30/30	76
WRD240512YD-3W	24	18-36	40	10	5/12	300/125	30/12	77
WRD241212YD-3W	24	18-36	40	10	12/12	125/125	12/12	80
WRD241515YD-3W	24	18-36	40	10	15/15	100/100	10/10	79
WRD242424YD-3W	24	18-36	40	10	24/24	62/62	6/6	81
WRD480505YD-3W	48	36-72	80	5	5/5	300/300	30/30	76
WRD480512YD-3W	48	36-72	80	5	5/12	400/83	40/8	78
WRD480909YD-3W	48	36-72	80	5	9/9	166/166	16/16	78
WRD481212YD-3W	48	36-72	80	5	12/12	125/125	12/12	80
WRD481515YD-3W	48	36-72	80	5	15/15	100/100	10/10	81
WRD482424YD-3W	48	36-72	80	5	24/24	62/62	6/6	82

\*Input voltage can't exceed this value, or will cause the permanent damage.

# MODEL SELECTION WRD 05 05 05 Y De-3W

①Product Series ③1st Output Voltage ②Input Voltage④2nd Output Voltage

⑤Wide (2:1) Input Range

⑥Package Style

(7)Rated Power

# **APPLICATIONS**

The WRD\_YD-3W series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

1)Where the voltage of the input power supply is wide range (voltage range  $\leq$  2:1);

2)Where isolation is necessary between input and output (Isolation Voltage  $\!\!\!\leq\! 1500 \text{VDC});$ 

3)Where isolation is necessary between Vout1 and Vout2 (Isolation Voltage≤1000VDC);

4)Where the regulation of the output voltage and the output ripple noise are demanded.





COMMON SPECIFICATIONS					
Item	Test Conditions	Min.	Тур.	Max.	Units
Storage humidity				95	%
Operating temperature		-40		85	
Storage Temperature		-55		125	°C
Temp. rise at full load			15		
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling	Free Air Convection				
Case Material	Plastic (UL94-V0)				
Short circuit protection	Continuous, Automatic Recovery				
MTBF		1000			K hours
Weight			15		g



#### **ISOLATION SPECIFICATIONS** Max. **Test Conditions** Min. Тур. Units Isolation voltage Tested for 1 minute and 1mA max 1500 VDC Isolation resistance Test at 500VDC 1000 МΩ Isolation capacitance Input/Output, 100KHz/1V 100 рF

#### **OUTPUT SPECIFICATIONS** Item **Test Conditions** Min. Тур. Max. Units Output power Refer to product program 0.3 W Main output voltage accuracy Refer to recommended circuit $\pm 1$ $\pm 3$ Vice-output voltage accuracy Refer to recommended circuit $\pm 3$ $\pm 5$ % Load regulation From 10% to 100% load $\pm 0.5$ $\pm 1*$ Line regulation Input voltage from low to high $\pm 0.2$ ±0.5 Temperature drift (Vout) Refer to recommended circuit $\pm 0.03$ %/℃ Ripple\*\* 20MHz Bandwidth 20 50 mVp-p 20MHz Bandwidth 75 150 Switching frequency 100% load, input voltage range

#### **APPLICATION NOTE**

#### 1) Requirement On Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load no less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

#### 2) Recommended Circuit

All the WRD-YD-3W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load (see Figure 1).

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high, or may cause start-up problem. If you want to use the products in high EMI, please choose our metal packaged products (WRD\_YD-3W). For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees

(Table 1). General:

Cin: 5V,12V 100μF 24V&48V 22μF/10μF

Cout: 10µF/100mA


#### 3) Input Current


While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current lp (Figure 2).

General: Ip≤1.4\*lin-max

#### 4) No parallel connection or plug and play

## **WRD-YD-3W Series**

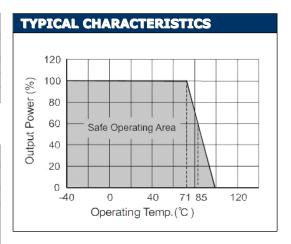

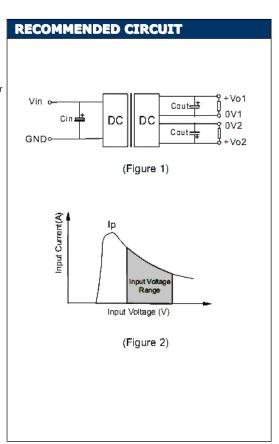

#### EXTERNAL CAPACITOR TABLE (TABLE 1)

Output External Capacitor Table (Table 1)				
Vout(VDC)	Cout(uF)			
5	680			
9	470			
12	330			
15	220			
24	100			

<sup>\*</sup>Supply voltage must be discontinued at the end of short circuit duration.

<sup>\*</sup>Dual output models unbalanced load:  $\pm$  5%.


<sup>\*\*</sup>Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.




# **WRD-YD-3W Series**

#### **OUTLINE DIMENSIONS & FOOTPRINT DETAILS**

#### **MECHANICAL DIMENSIONS**





Note:


Unit:mm[inch]

Pin section tolerances: ±0.10mm[±0.004inch] General tolerances: ±0.25mm[±0.010inch]


FOOTPRIN	FOOTPRINT DETAILS			
Pin	Function			
2,3	GND			
9	0V2			
10,15	NC			
11	+Vo2			
14	+Vo1			
16	0V1			
22,23	Vin			

NC: No connection

### **RECOMMENDED FOOTPRINT(TOP VIEW)**

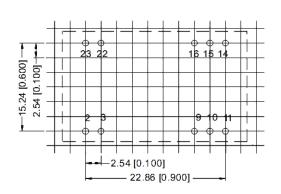

#### **TUBE OUTLINE DIMENSIONS**



Note:

Unit:mm[inch]

General tolerances: ± 0.50mm[± 0.020inch] L=530mm[20.866inch] Tube Quantity: 15pcs L=220mm[8.661inch] Tube Quantity: 6pcs



Microdc Professional Power Module, Inc. Tel:0086-20-86000646 E-mail:tech@microdc.cn Website:http://www.microdc.cn



#### **ROHS COMPLIANT INFORMATION**

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300° C for 10 seconds.

The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.



#### REACH COMPLIANT INFORMATION

This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval.