N-channel TrenchMOS standard level FET

6 July 2012

Product data sheet

1. Product profile

1.1 General description

Standard level N-channel enhancement mode Field-Effect Transistor (FET) in a plastic package using TrenchMOS technology. This product has been designed and qualified to the appropriate AEC standard for use in automotive critical applications.

1.2 Features and benefits

- Low conduction losses due to low on-state resistance
- Q101 compliant
- Suitable for standard level gate drive sources
- Suitable for thermally demanding environments due to 175 °C rating

1.3 Applications

. . .

- 12 V, 24 V and 42 V loads
- Automotive systems
- General purpose power switching
- Motors, lamps and solenoids

1.4 Quick reference data

	uick reference data	•			_		
Symbol	Parameter	Conditions		Min	Тур	Max	Unit
V _{DS}	drain-source voltage	T _j ≥ 25 °C; T _j ≤ 175 °C		-	-	100	V
I _D	drain current	V _{GS} = 10 V; T _{mb} = 25 °C; <u>Fig. 1</u> ; <u>Fig. 3</u>	[1]	-	-	75	А
P _{tot}	total power dissipation	T _{mb} = 25 °C; <u>Fig. 2</u>		-	-	300	W
Static chara	cteristics	·					
R _{DSon}	drain-source on-state resistance	V _{GS} = 10 V; I _D = 25 A; T _j = 25 °C; <u>Fig. 11; Fig. 12</u>		-	8.6	10	mΩ
Dynamic cha	aracteristics						
Q _{GD}	gate-drain charge	V_{GS} = 10 V; I_D = 25 A; V_{DS} = 80 V; T_j = 25 °C; <u>Fig. 13</u>		-	22	-	nC
Avalanche r	uggedness	·					
E _{DS(AL)S}	non-repetitive drain- source avalanche energy	$\begin{split} I_D &= 75 \text{ A}; V_{sup} \leq 100 \text{V}; \text{R}_{GS} = 50 \Omega; \\ V_{GS} &= 10 \text{V}; \text{T}_{j(init)} = 25 ^\circ\text{C}; \text{ unclamped} \end{split}$		-	-	629	mJ





N-channel TrenchMOS standard level FET

[1] Continuous current is limited by package.

2. Pinning information

Table 2.	Pinning	information		
Pin	Symbol	Description	Simplified outline	Graphic symbol
1	G	gate	mb	D
2	D	drain[1]		
3	S	source		G-UFA
mb	D	mounting base; connected to drain	D2PAK (SOT404)	mbb076 S

[1] It is not possible to make connection to pin 2.

3. Ordering information

Table 3. Ordering information							
Type number	Package						
	Name	Description	Version				
BUK7610-100B	D2PAK	plastic single-ended surface-mounted package (D2PAK); 3 leads (one lead cropped)	SOT404				

4. Marking

Table 4. Marking codes	
Type number	Marking code
BUK7610-100B	BUK7610-100B

5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).


Symbol	Parameter	Conditions		Min	Max	Unit
V _{DS}	drain-source voltage	T _j ≥ 25 °C; T _j ≤ 175 °C		-	100	V
V _{DGR}	drain-gate voltage	R _{GS} = 20 kΩ		-	100	V
V _{GS}	gate-source voltage			-20	20	V
I _D	drain current	T _{mb} = 25 °C; V _{GS} = 10 V; <u>Fig. 1</u> ; <u>Fig. 3</u>	[1]	-	110	А
			[2]	-	75	А
		T _{mb} = 100 °C; V _{GS} = 10 V; <u>Fig. 1</u>	[2]	-	75	А
I _{DM}	peak drain current	T_{mb} = 25 °C; pulsed; $t_p \le 10 \ \mu$ s; Fig. 3		-	438	А
BUK7610-100B	All	information provided in this document is subject to legal disclaimers.		© N	XP B.V. 2012. A	All rights reserve

BUK7610-100B

N-channel TrenchMOS standard level FET

Symbol	Parameter	Conditions		Min	Мах	Unit
P _{tot}	total power dissipation	T _{mb} = 25 °C; <u>Fig. 2</u>		-	300	W
T _{stg}	storage temperature			-55	175	°C
Tj	junction temperature			-55	175	°C
Source-dra	in diode			1		
I _S	source current	T _{mb} = 25 °C	[1]	-	110	А
			[2]	-	75	А
I _{SM}	peak source current	pulsed; $t_p \le 10 \ \mu s$; $T_{mb} = 25 \ ^\circ C$		-	438	А
Avalanche	ruggedness					
E _{DS(AL)S}	non-repetitive drain-source avalanche energy	I_D = 75 A; $V_{sup} \le 100$ V; R_{GS} = 50 Ω; V_{GS} = 10 V; $T_{j(init)}$ = 25 °C; unclamped		-	629	mJ

Current is limited by power dissipation chip rating.
Continuous current is limited by package.





 $V_{\rm GS} \ge 5 \; V$





Fig. 2. Normalized total power dissipation as a function of mounting base temperature


$$P_{der} = \frac{P_{tot}}{P_{tot(25^{\circ}C)}} \times 100\%$$

N-channel TrenchMOS standard level FET

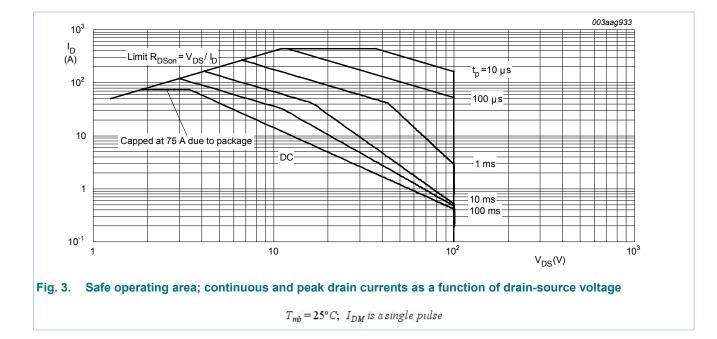

6. Thermal characteristics

Table 6. Thermal characteristics							
Symbol	Parameter	Conditions		Min	Тур	Max	Unit
R _{th(j-mb)}	thermal resistance from junction to mounting base	Fig. 4		-	-	0.5	K/W
R _{th(j-a)}	thermal resistance from junction to ambient	mounted on printed-circuit board ; minimum footprint		-	50	-	K/W

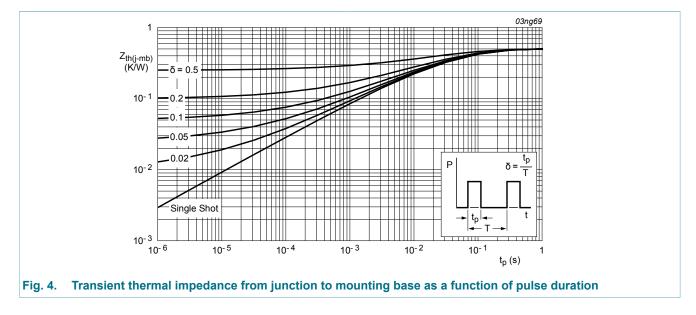

N-channel TrenchMOS standard level FET

7. Characteristics

Symbol	Parameter	Conditions	Min	Тур	Мах	Unit
Static char	acteristics					
V _{(BR)DSS}	drain-source	I_D = 0.25 mA; V_{GS} = 0 V; T_j = 25 °C	100	-	-	V
	breakdown voltage	I_D = 0.25 mA; V_{GS} = 0 V; T_j = -55 °C	89	-	-	V
V _{GS(th)}	gate-source threshold voltage	I_D = 1 mA; V_{DS} = V_{GS} ; T_j = 175 °C; Fig. 10	1	-	-	V
		$I_D = 1 \text{ mA}; V_{DS} = V_{GS}; T_j = 25 \text{ °C};$ Fig. 10	2	3	4	V
		$I_D = 1 \text{ mA}; V_{DS} = V_{GS}; T_j = -55 \text{ °C};$ Fig. 10	-	-	4.4	V
I _{DSS}	drain leakage current	V _{DS} = 100 V; V _{GS} = 0 V; T _j = 25 °C	-	0.02	1	μA
		V _{DS} = 100 V; V _{GS} = 0 V; T _j = 175 °C	-	-	500	μA
I _{GSS}	gate leakage current	V _{GS} = 20 V; V _{DS} = 0 V; T _j = 25 °C	-	2	100	nA
		V_{GS} = -20 V; V_{DS} = 0 V; T_j = 25 °C	-	2	100	nA
R _{DSon}	drain-source on-state resistance	V _{GS} = 10 V; I _D = 25 A; T _j = 25 °C; Fig. 11; Fig. 12	-	8.6	10	mΩ
		V _{GS} = 10 V; I _D = 25 A; T _j = 175 °C; Fig. 11; Fig. 12	-	-	25	mΩ
Dynamic cl	haracteristics	· · · · · · · · · · · · · · · · · · ·				
Q _{G(tot)}	total gate charge	I_D = 25 A; V_{DS} = 80 V; V_{GS} = 10 V;	-	80	-	nC
Q _{GS}	gate-source charge	T _j = 25 °C; <u>Fig. 13</u>	-	18	-	nC
Q _{GD}	gate-drain charge		-	22	-	nC
C _{iss}	input capacitance	V _{GS} = 0 V; V _{DS} = 25 V; f = 1 MHz;	-	5080	6773	pF
C _{oss}	output capacitance	T _j = 25 °C; <u>Fig. 14</u>	-	677	812	pF
C _{rss}	reverse transfer capacitance		-	168	230	pF
t _{d(on)}	turn-on delay time	V_{DS} = 30 V; R _L = 1.2 Ω; V _{GS} = 10 V;	-	33	-	ns
t _r	rise time	$R_{G(ext)} = 10 \ \Omega; T_j = 25 \ ^{\circ}C$	-	45	-	ns
t _{d(off)}	turn-off delay time		-	120	-	ns
t _f	fall time		-	36	-	ns
L _D	internal drain inductance	from drain lead 6 mm from package to centre of die ; T_j = 25 °C	-	4.5	-	nH
		from upper edge of drain mounting base to centre of die ; $T_j = 25 \text{ °C}$	-	2.5	-	nH
L _S	internal source inductance	from source lead to source bond pad ; $T_i = 25 \ ^{\circ}C$	-	7.5	-	nH

BUK7610-100B

N-channel TrenchMOS standard level FET

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
Source-drain diode							
V _{SD}	source-drain voltage	I_{S} = 40 A; V_{GS} = 0 V; T_{j} = 25 °C; <u>Fig. 15</u>		-	0.85	1.2	V
t _{rr}	reverse recovery time	I _S = 20 A; dI _S /dt = -100 A/μs;		-	69	-	ns
Q _r	recovered charge	V_{GS} = -10 V; V_{DS} = 30 V; T_j = 25 °C		-	212	-	nC





Fig. 5. Output characteristics: drain current as a function of drain-source voltage; typical values






Fig. 7. Sub-threshold drain current as a function of gate-source voltage

 $T_j = 25 \,^\circ C; V_{DS} = 5V$




Fig. 6. Drain-source on-state resistance as a function of gate-source voltage; typical values

 $T_j = 25^{\circ}C; I_D = 25A$





Fig. 8. Forward transconductance as a function of drain current; typical values

 $T_j = 25^{\circ}C; V_{DS} = 25V$


BUK7610-100B

N-channel TrenchMOS standard level FET

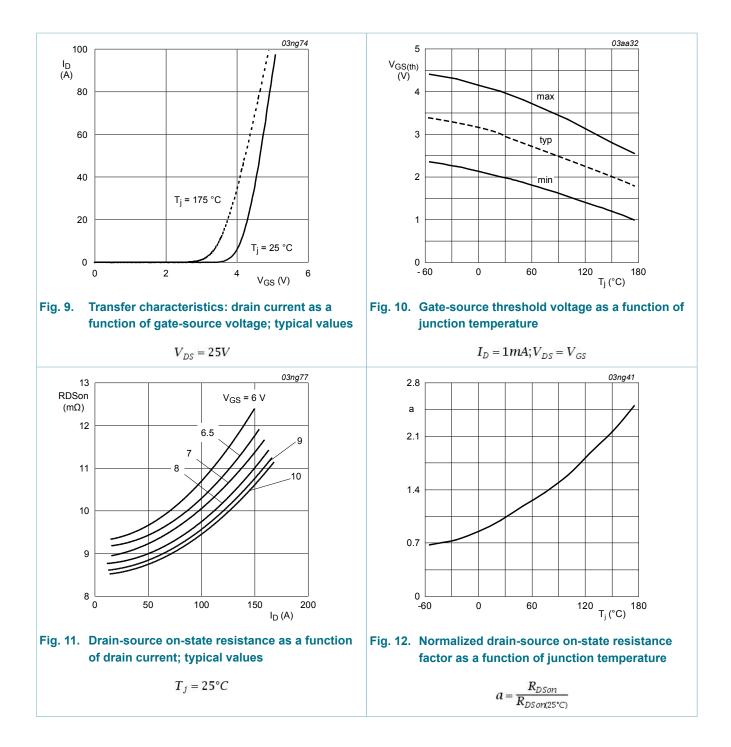

BUK7610-100B

N-channel TrenchMOS standard level FET

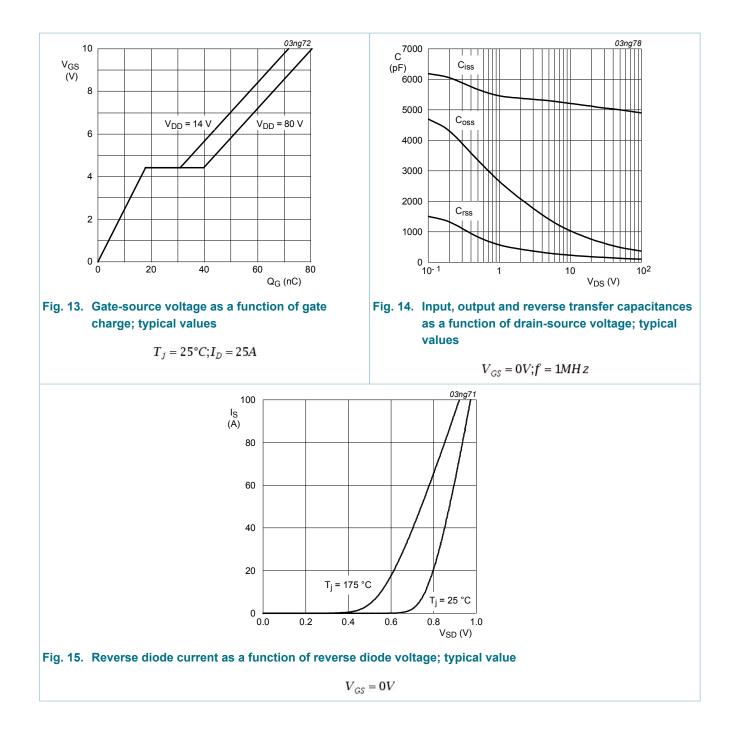

N-channel TrenchMOS standard level FET

8. Package outline

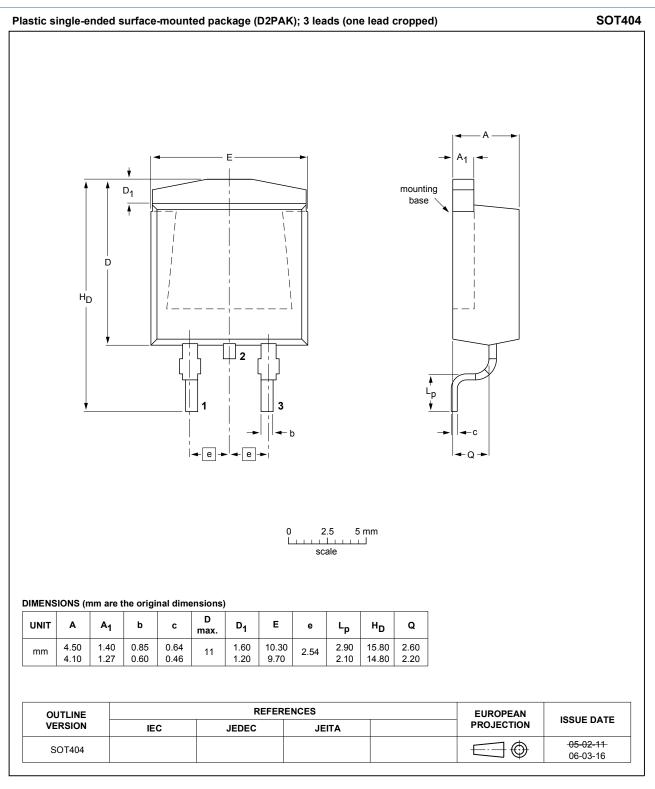


Fig. 16. D2PAK (SOT404)

N-channel TrenchMOS standard level FET

9. Legal information

9.1 Data sheet status

Document status [1][2]	Product status [<u>3]</u>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <u>http://www.nxp.com</u>.

9.2 Definitions

Preview — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

9.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

N-channel TrenchMOS standard level FET

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

9.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Adelante, Bitport, Bitsound, CoolFlux, CoReUse, DESFire, EZ-HV, FabKey, GreenChip, HiPerSmart, HITAG, I²C-bus logo, ICODE, I-CODE, ITEC, Labelution, MIFARE, MIFARE Plus, MIFARE Ultralight, MoReUse, QLPAK, Silicon Tuner, SiliconMAX, SmartXA, STARplug, TOPFET, TrenchMOS, TriMedia and UCODE — are trademarks of NXP B.V.

HD Radio and **HD Radio** logo — are trademarks of iBiquity Digital Corporation.

N-channel TrenchMOS standard level FET

10. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	2
3	Ordering information	2
4	Marking	2
5	Limiting values	2
6	Thermal characteristics	4
7	Characteristics	5
8	Package outline	9
9	Legal information	10
9.1	Data sheet status	10
9.2	Definitions	10
9.3	Disclaimers	10
9.4	Trademarks	11

© NXP B.V. 2012. All rights reserved

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com Date of release: 6 July 2012