

# SAW Components

Data Sheet B3572





# SAW ComponentsB3572Low-loss Filter868,95 MHzData Sheet


## Ceramic package QCC8C



- RF low-loss filter for remote control receivers
- Package for Surface Mounted Technology (SMT)

## Terminals


■ Ni, gold plated



typ. dimensions in mm, approx. weight 0,1 g

## **Pin configuration**

1 2,7 5	Input Input Ground Output
5 3,6	Output Output Ground
4,8	Case - Ground
4,0	Case - Glound



Туре	Ordering code	Marking and package according to	Packing according to
B3572	B39871-B3572-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostactic Sensitive Device (ESD)

## **Maximum ratings**

Operable temperature range	T <sub>A</sub>	-45/+105	°C	
Storage temperature range	$T_{\rm stg}$	-45/+105	°C	
DC voltage	V <sub>DC</sub>	0	V	
Source power	$P_S$	0	dBm	source impedance 50 $\Omega$





SAW Components					B3572
Low-loss Filter				868,	95 MHz
Data Sheet					
Characteristics					
Reference temperature: $T_A$	= 25 °C	C			
			ning network		
Terminating load impedance: $Z_{L}$	= 50 Ω	and matcl	ning network	Ι.	
		min.	typ.	max.	
Center frequency	f <sub>C</sub>	_	869,04		MHz
(center frequency between 3 dB points)					
Minimum insertion attenuation	$\alpha_{min}$				
868,70 869,38 MHz		_	2,7	4,2	dB
<b>Pass band</b> (relative to $\alpha_{\min}$ )					
868,70 869,38 MHz		_	1,0	3,0	dB
868,60 869,48 MHz			1,5	6,0	dB
Relative attenuation (relative to $\alpha_{min}$ )	$\alpha_{rel}$				
10,00 700,00 MHz		50	55	_	dB
700,00 830,00 MHz		35	45	—	dB
830,00 850,60 MHz		32	40		dB
850,60 865,80 MHz		25	30		dB
871,60 875,10 MHz		11	16	—	dB
875,10 883,60 MHz		22	27	—	dB
883,60 900,00 MHz		30	35	—	dB
900,001000,00 MHz		35	40	—	dB
Impedance for pass band matching					+
Input: $Z_{\rm IN} = R_{\rm IN}    C_{\rm IN}$		_	200    2,40	_	Ω    pF
Output: $Z_{OUT} = R_{OUT}    C_{OUT}$		_	200    2,40	—	Ω    pF
Temperature coefficient of frequency <sup>1)</sup>	TC <sub>f</sub>		-0,03	_	ppm/K <sup>2</sup>
Frequency inversion point	T <sub>0</sub>	15	_	35	°C

<sup>1)</sup>Temperature dependence of  $f_C$ :  $f_C(T_A) = f_C(T_0) (1 + TC_f(T_A - T_0)^2)$ 



SAW Components				B3572
Low-loss Filter			868,	95 MHz
Data Sheet				
Characteristics				
Terminating source impedance: $Z_{\rm S} = 50$		ning network ning network		
	min.	typ.	max.	
Center frequency $f_C$ (center frequency between 3 dB points)	-	868,95	—	MHz
Minimum insertion attenuationα <sub>min</sub> 868,70869,20MHz	_	2,7	4,7	dB
<b>Pass band</b> (relative to $\alpha_{min}$ )				
868,70 869,20 MHz	_	1,0	3,0	dB
868,60 869,30 MHz	_	1,5	6,0	dB
Relative attenuation (relative to $\alpha_{min}$ ) $\alpha_{rel}$				
10,00 700,00 MHz	50	55	_	dB
700,00 830,00 MHz	35	45	_	dB
830,00 850,60 MHz	32	40	_	dB
850,60 865,62 MHz	25	30	—	dB
871,60 875,10 MHz	11	16	_	dB
875,10 883,60 MHz	22	27	—	dB
883,60 900,00 MHz	30	35		dB
900,001000,00 MHz	35	40	—	dB
Impedance for pass band matching <sup>2)</sup>				
Input: $Z_{IN} = R_{IN}    C_{IN}$	_	200    2,40		Ω    pF
Output: $Z_{OUT} = R_{OUT}    C_{OUT}$	_	200    2,40	_	Ω    pF

<sup>2)</sup> Impedance for passband matching bases on an ideal, perfect matching of the SAW filter to source- and to load impedance (here 50 Ohm). After the SAW filter is removed and input impedance into the input matching / output matching network is calculated.


The conjugate complex value of these characteristic impedances are the input and output impedances for flat passband. For more details, we refer to EPCOS application note #4.



**SAW Components** 

# Data Sheet

Matching network to 50  $\Omega$  (element values depend on pcb layout and equivalent circuit)



# Minimising the crosstalk

For a good ultimate rejection a low crosstalk is necessary. Low crosstalk can be realised with a good RF layout. The major crosstalk mechanism is caused by the "ground-loop" problem.

Grounding loops are created if input-and output transducer GND are connected on the top-side of the PCB and fed to the system grounding plane by a common via hole. To avoid the common ground path, the ground pin of the input- and output transducer are fed to the system ground plane (bottom PCB plane) by their own via hole. The transducers' grounding pins should be isolated from the upper grounding plane.

A common GND inductivity of 0.5nH degrades the ultimate rejection (crosstalk) by 20dB.

The optimised PCB layout, including matching network for transformation to 50 Ohm, is shown here. In this PCB layout the grounding loops are minimised to realise good ultimate rejection.



Optimised PCB layout for SAW filters in QCC8C package, pinning 1,5 (top side, scale 1:1)

The bottom side is a copper plane (system ground area). The input and output grounding pins are isolated and connected to the common ground by separated via holes.

For good contact of the upper grounding area with the lower side it is necessary to place enough via holes.




# Low-loss Filter


B3572 868,95 MHz

**Data Sheet** 

# Normalized frequency response

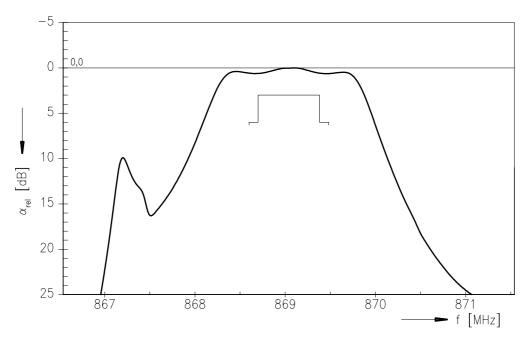

# Normalized frequency response (wideband)

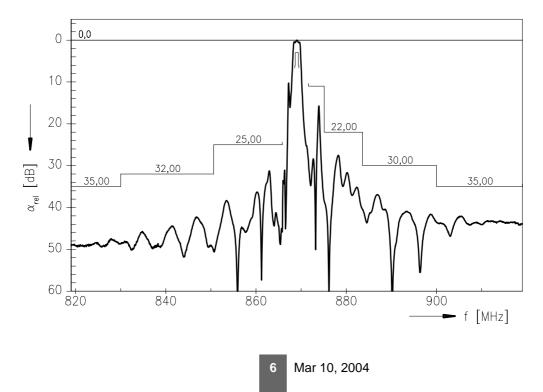



SAW Components	B3572
Low-loss Filter	868,95 MHz

**Data Sheet** 

#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW CE AE PD P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2004. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

