

International **IR** Rectifier

RADIATION HARDENED POWER MOSFET SURFACE MOUNT (SMD-1)

PD - 91300D

IRHN9250
JANSR2N7423U
200V, P-CHANNEL


REF: MIL-PRF-19500/662

RAD Hard™ HEXFET® TECHNOLOGY

Product Summary

Part Number	Radiation Level	R _{Ds(on)}	I _D	QPL Part Number
IRHN9250	100K Rads (Si)	0.315Ω	-14A	JANSR2N7423U
IRHN93250	300K Rads (Si)	0.315Ω	-14A	JANSF2N7423U

International Rectifier's RADHard HEXFET™ technology provides high performance power MOSFETs for space applications. This technology has over a decade of proven performance and reliability in satellite applications. These devices have been characterized for both Total Dose and Single Event Effects (SEE). The combination of low Rdson and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.

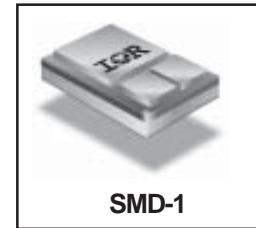

Features:

- Single Event Effect (SEE) Hardened
- Low R_{Ds(on)}
- Low Total Gate Charge
- Proton Tolerant
- Simple Drive Requirements
- Ease of Paralleling
- Hermetically Sealed
- Surface Mount
- Ceramic Package
- Light Weight

Absolute Maximum Ratings

Pre-Irradiation

	Parameter	Units	
I _D @ V _{GS} = -12V, T _C = 25°C	Continuous Drain Current	A	-14
I _D @ V _{GS} = -12V, T _C = 100°C	Continuous Drain Current		-9.0
I _{DM}	Pulsed Drain Current ①	W	-56
P _D @ T _C = 25°C	Max. Power Dissipation		150
	Linear Derating Factor	W/°C	1.2
V _{GS}	Gate-to-Source Voltage		±20
E _{AS}	Single Pulse Avalanche Energy ②	mJ	500
I _{AR}	Avalanche Current ①	A	-14
E _{AR}	Repetitive Avalanche Energy ①	mJ	15
dv/dt	Peak Diode Recovery dv/dt ③	V/ns	-41
T _J	Operating Junction	°C	-55 to 150
T _{STG}	Storage Temperature Range		
	PCKG Mounting Surface Temp.		300 (for 5s)
	Weight	g	2.6 (typical)

For footnotes refer to the last page

Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (Unless Otherwise Specified)

	Parameter	Min	Typ	Max	Units	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	-200	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = -1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}/\Delta T_j}$	Temperature Coefficient of Breakdown Voltage	—	-0.24	—	V°C	Reference to 25°C , $\text{I}_D = -1.0\text{mA}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State Resistance	—	—	0.315	Ω	$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -9.0\text{A}$ ④
		—	—	0.33		$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -14\text{A}$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	-2.0	—	-4.0	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}, \text{I}_D = -1.0\text{mA}$
g_{fs}	Forward Transconductance	4.0	—	—	S (f)	$\text{V}_{\text{DS}} > -15\text{V}, \text{I}_{\text{DS}} = -9.0\text{A}$ ④
I_{DSS}	Zero Gate Voltage Drain Current	—	—	-25	μA	$\text{V}_{\text{DS}} = -160\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
		—	—	-250		$\text{V}_{\text{DS}} = -160\text{V}, \text{V}_{\text{GS}} = 0\text{V}, \text{T}_j = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Forward	—	—	-100	nA	$\text{V}_{\text{GS}} = -20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	—	100		$\text{V}_{\text{GS}} = 20\text{V}$
Q_g	Total Gate Charge	—	—	200	nC	$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -14\text{A}$
Q_{gs}	Gate-to-Source Charge	—	—	45		$\text{V}_{\text{DS}} = -100\text{V}$
Q_{gd}	Gate-to-Drain ('Miller') Charge	—	—	85	ns	$\text{V}_{\text{DD}} = -100\text{V}, \text{I}_D = -14\text{A}, \text{V}_{\text{GS}} = -12\text{V}, \text{R}_G = 2.35\Omega$
$\text{t}_{\text{d(on)}}$	Turn-On Delay Time	—	—	60		
t_r	Rise Time	—	—	240		
$\text{t}_{\text{d(off)}}$	Turn-Off Delay Time	—	—	225		
t_f	Fall Time	—	—	220		
$\text{L}_{\text{S}} + \text{L}_{\text{D}}$	Total Inductance	—	4.0	—	nH	
C_{iss}	Input Capacitance	—	4200	—	pF	$\text{V}_{\text{GS}} = 0\text{V}, \text{V}_{\text{DS}} = -25\text{V}$ $f = 1.0\text{MHz}$
C_{oss}	Output Capacitance	—	690	—		
C_{rss}	Reverse Transfer Capacitance	—	160	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min	Typ	Max	Units	Test Conditions
I_{S}	Continuous Source Current (Body Diode)	—	—	-14	A	
I_{SM}	Pulse Source Current (Body Diode) ①	—	—	-56		
V_{SD}	Diode Forward Voltage	—	—	-3.6	V	$\text{T}_j = 25^\circ\text{C}, \text{I}_{\text{S}} = -14\text{A}, \text{V}_{\text{GS}} = 0\text{V}$ ④
t_{rr}	Reverse Recovery Time	—	—	775	rS	$\text{T}_j = 25^\circ\text{C}, \text{I}_F = -14\text{A}, \text{di/dt} \leq -100\text{A}/\mu\text{s}$
Q_{RR}	Reverse Recovery Charge	—	—	7.2	μC	$\text{V}_{\text{DD}} \leq -50\text{V}$ ④
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $\text{L}_{\text{S}} + \text{L}_{\text{D}}$.				

Thermal Resistance

	Parameter	Min	Typ	Max	Units	Test Conditions
R_{thJC}	Junction-to-Case	—	—	0.83	$^\circ\text{C}/\text{W}$	
$\text{R}_{\text{thJ-PCB}}$	Junction-to-PC board	—	6.6	—		soldered to a 1" square copper-clad board

Note: Corresponding Spice and Saber models are available on the G&S Website.

For footnotes refer to the last page

Radiation Characteristics

IRHN9250, JANSR2N7423U

International Rectifier Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table 1. Electrical Characteristics @ $T_j = 25^\circ\text{C}$, Post Total Dose Irradiation^{⑤⑥}

	Parameter	100K Rads(S) ¹		300 K Rads (S) ²		Units	Test Conditions
		Min	Max	Min	Max		
BV_{DSS}	Drain-to-Source Breakdown Voltage	-200	—	-200	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = -1.0\text{mA}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	-2.0	-4.0	-2.0	-5.0		$\text{V}_{\text{GS}} = \text{V}_{\text{DS}}, \text{I}_D = -1.0\text{mA}$
I_{GSS}	Gate-to-Source Leakage Forward	—	-100	—	-100	nA	$\text{V}_{\text{GS}} = -20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	100	—	100		$\text{V}_{\text{GS}} = 20\text{ V}$
I_{DSS}	Zero Gate Voltage Drain Current	—	-25	—	-25	μA	$\text{V}_{\text{DS}} = -160\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ^④ On-State Resistance (TO-3)	—	0.317	—	0.317	Ω	$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -9.0\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ^④ On-State Resistance (SMD-1)	—	0.315	—	0.315	Ω	$\text{V}_{\text{GS}} = -12\text{V}, \text{I}_D = -9.0\text{A}$
V_{SD}	Diode Forward Voltage ^④	—	-3.6	—	-3.6	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_S = -14\text{A}$

1. Part number IRHN9250 (JANSR2N7423U)

2. Part numbers IRHN93250 (JANSF2N7423U)

International Rectifier radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

Table 2. Single Event Effect Safe Operating Area

Ion	LET MeV/(mg/cm ²)	Energy (MeV)	Range (μm)	$\text{V}_{\text{DS}} (\text{V})$				
				@ $\text{V}_{\text{GS}} = 0\text{V}$	@ $\text{V}_{\text{GS}} = 5\text{V}$	@ $\text{V}_{\text{GS}} = 10\text{V}$	@ $\text{V}_{\text{GS}} = 15\text{V}$	@ $\text{V}_{\text{GS}} = 20\text{V}$
Cu	28.0	285	43	-200	-200	-200	-200	—
Br	36.8	305	39	-200	-200	-160	-75	—

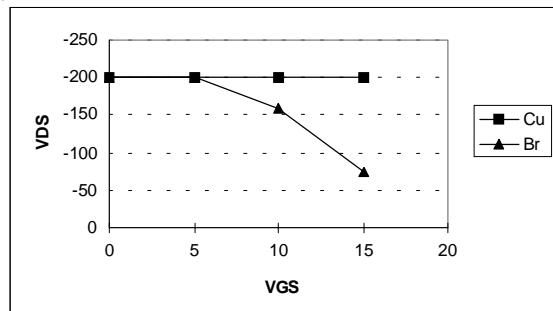


Fig a. Single Event Effect, Safe Operating Area

For footnotes refer to the last page

IRHN9250, JANSR2N7423U

Pre-Irradiation

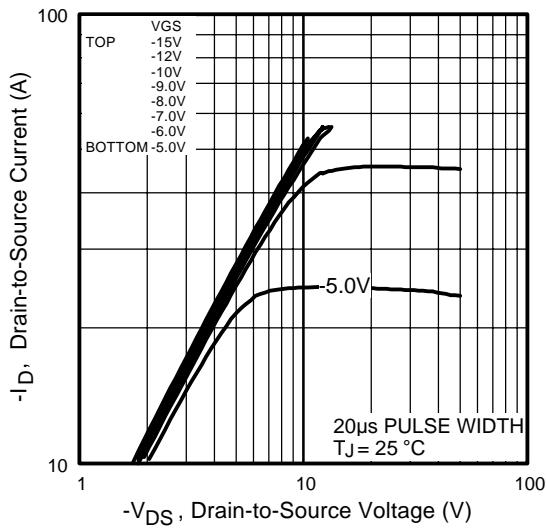


Fig 1. Typical Output Characteristics

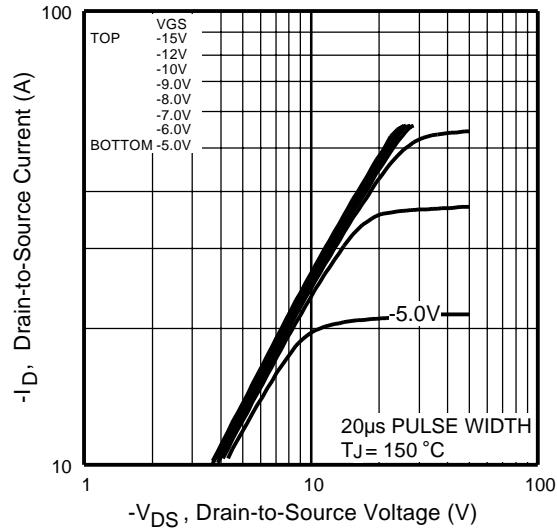


Fig 2. Typical Output Characteristics

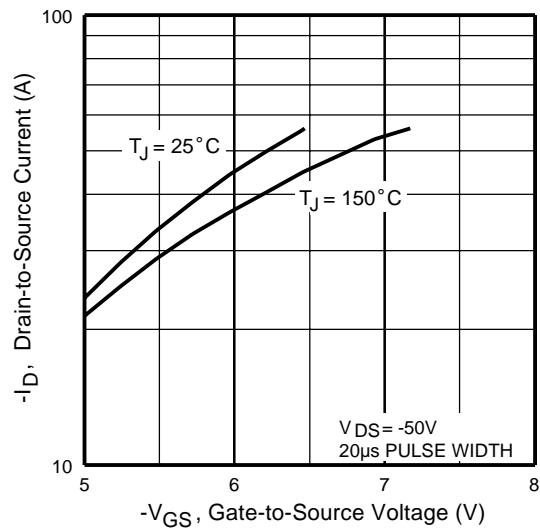


Fig 3. Typical Transfer Characteristics

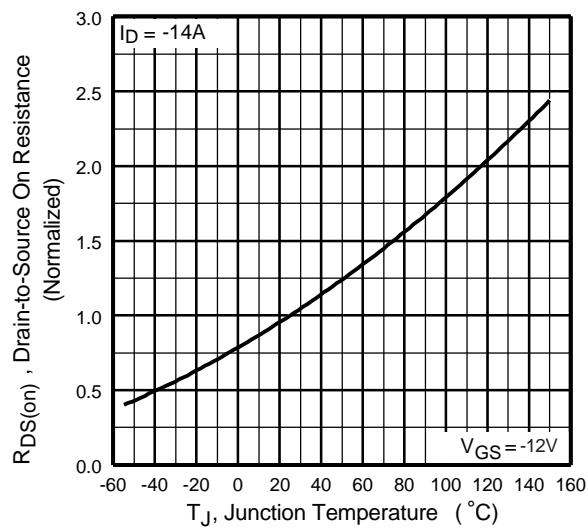


Fig 4. Normalized On-Resistance Vs. Temperature

Pre-Irradiation

IRHN9250, JANSR2N7423U

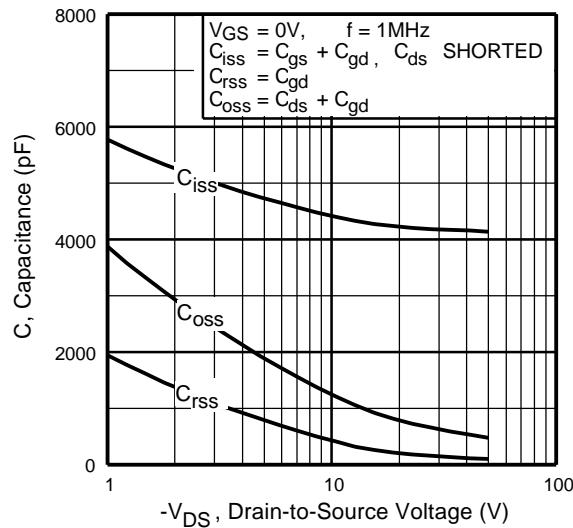


Fig5. Typical Capacitance Vs.
Drain-to-Source Voltage

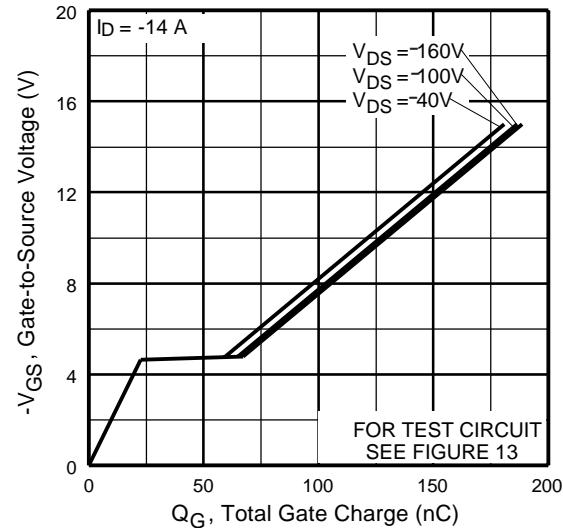


Fig6. Typical Gate Charge Vs.
Gate-to-Source Voltage

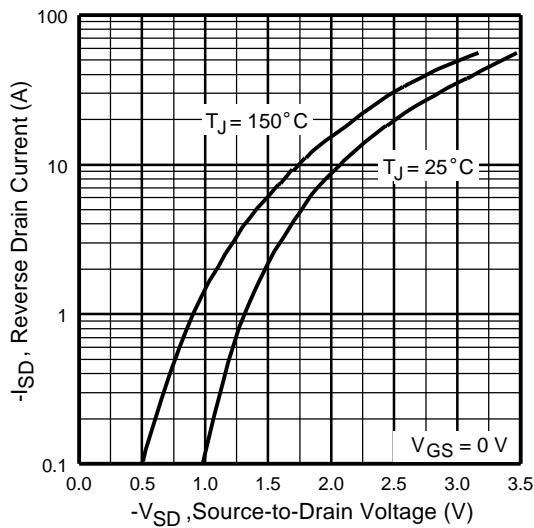


Fig7. Typical Source-Drain Diode
Forward Voltage

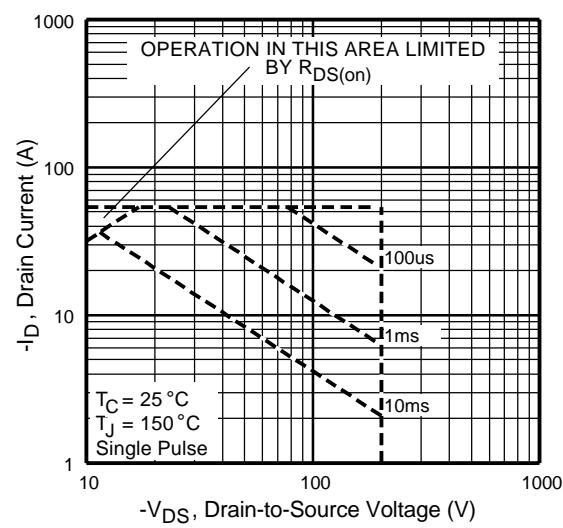


Fig8. Maximum Safe Operating Area

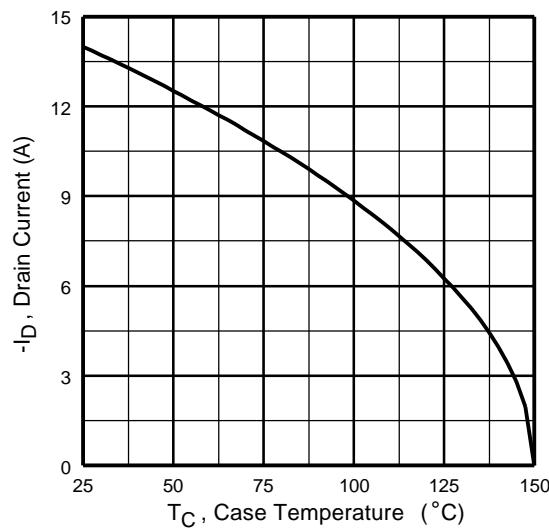


Fig9. Maximum Drain Current Vs.
Case Temperature

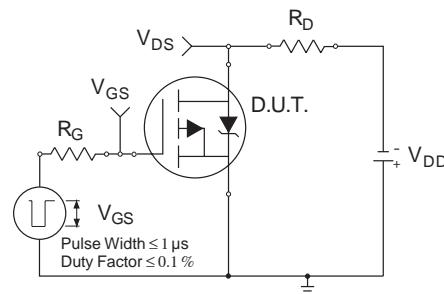


Fig10a. Switching Time Test Circuit

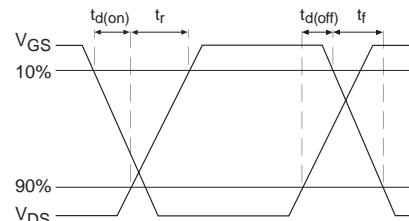


Fig10b. Switching Time Waveforms

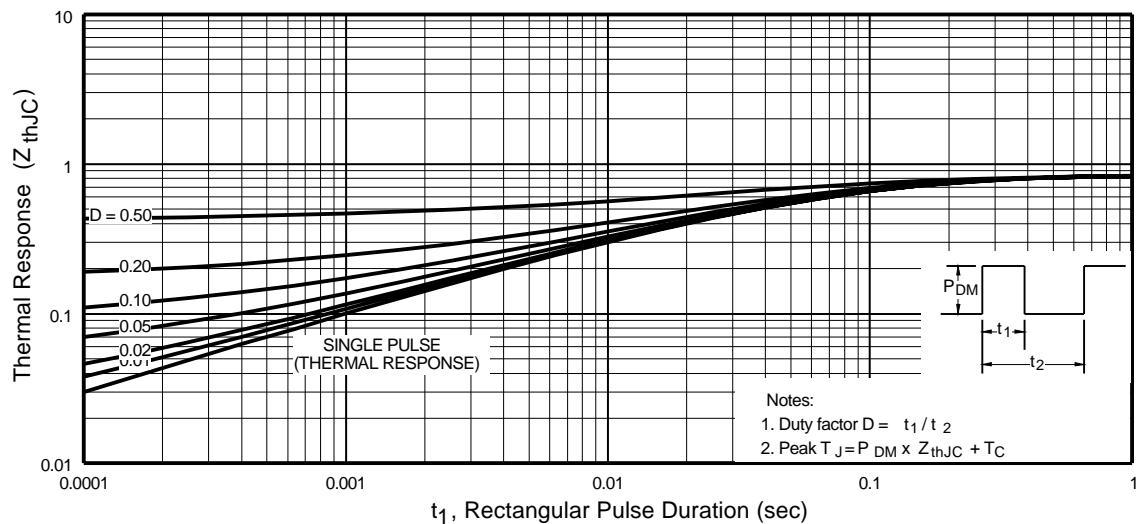


Fig11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

Pre-Irradiation

IRHN9250, JANSR2N7423U

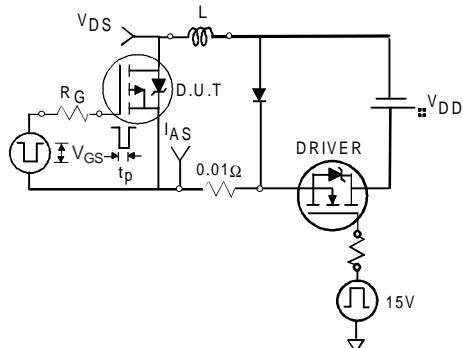


Fig12a. Unclamped Inductive Test Circuit

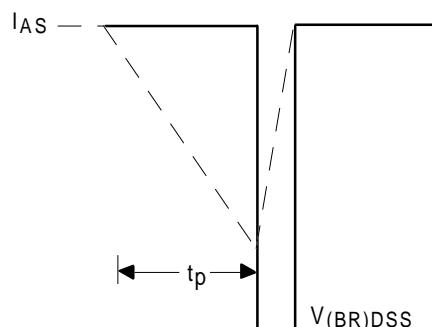


Fig12b. Unclamped Inductive Waveforms

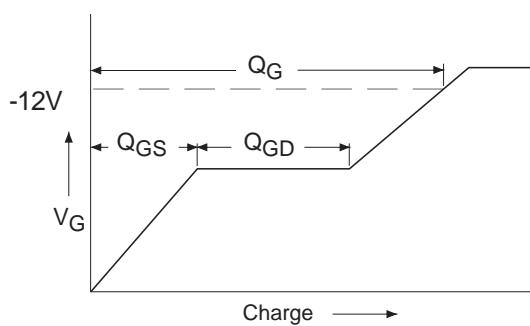


Fig13a. Basic Gate Charge Waveform

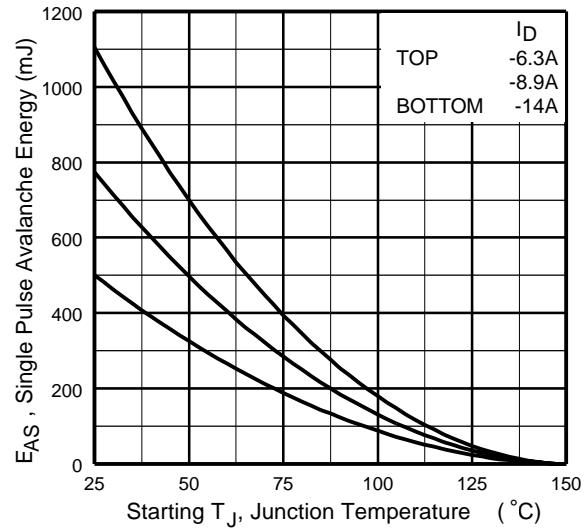


Fig12c. Maximum Avalanche Energy Vs. Drain Current

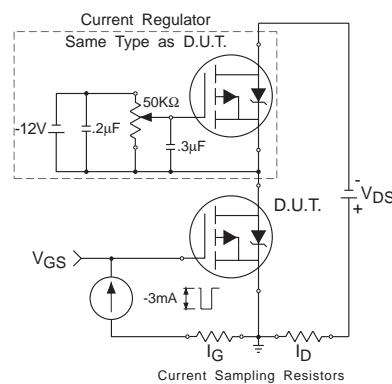
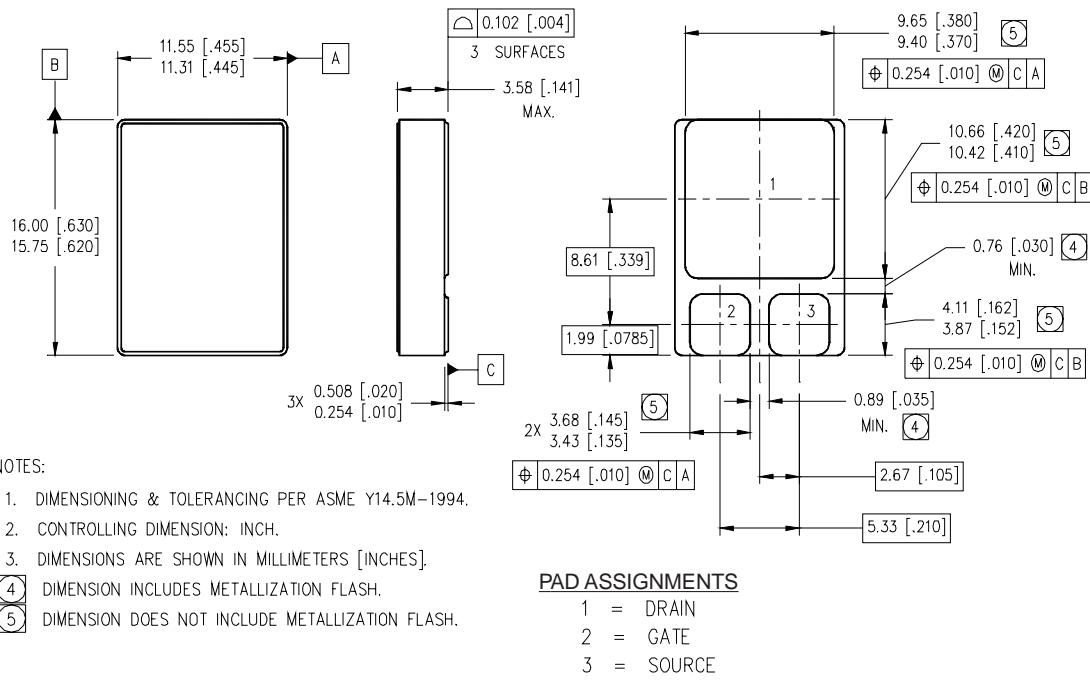


Fig13b. Gate Charge Test Circuit

Foot Notes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② $V_{DD} = -50V$, starting $T_J = 25^\circ C$, $L = 5.1mH$
Peak $I_L = -14A$, $V_{GS} = -12V$
- ③ $ISD \leq -14A$, $dI/dt \leq -600A/\mu s$,
 $V_{DD} \leq -200V$, $T_J \leq 150^\circ C$
- ④ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$
- ⑤ **Total Dose Irradiation with V_{GS} Bias.**
-12 volt V_{GS} applied and $V_{DS} = 0$ during irradiation per MIL-STD-750, method 1019, condition A.
- ⑥ **Total Dose Irradiation with V_{DS} Bias.**
-160 volt V_{DS} applied and $V_{GS} = 0$ during irradiation per MIL-STD-750, method 1019, condition A.

Case Outline and Dimensions—SMD-1

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 06/03