

BZX85C Series

V_Z : 2.7 to 200V

P_D : 1.3W

FEATURES :

- Silicon planar power zener diodes.
- For use in stabilizing and clipping circuits with high power rating.
- Standard zener voltage tolerance is $\pm 5\%$
- Other tolerances are available upon request.
- Pb / RoHS Free


MECHANICAL DATA :

Case: DO-41 Glass Case

Weight: approx. 0.25g

ZENER DIODES

DO - 41 Glass (DO-204AL)

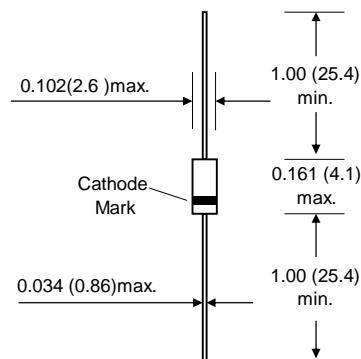

Dimensions in inches and (millimeters)

Maximum Ratings and Thermal Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Maximum Forward Voltage at I _F = 200 mA.	V _F	1.2	V
Power Dissipation at Ta = 25°C	P _D	1.3 ⁽¹⁾	W
Thermal Resistance Junction to Ambient Air	R _{θJA}	130 ⁽¹⁾	°C/W
Junction temperature	T _J	175	°C
Storage temperature range	T _S	-55 to + 175	°C

Note:

(1) Valid provided that leads at a distance of 3/8" from case are kept at ambient temperature.

ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

Type Number	Nominal Zener Voltage ⁽¹⁾		Maximum Zener Impedance, f = 1kHz			Maximum Reverse Leakage Current		Maximum DC Zener Current		Temp. coefficient of Zener Voltage $a_{mvz}(\% / ^\circ C)$	
	Vz @ Izr	Izr	Zzr @ Izr	Zzk @ Izk	Izk	Ir @ Vr		Izm ⁽²⁾			
	(V)	(mA)	(W)	(W)	(mA)	(mA)	(V)	(mA)	(mA)	min.	max.
BZX85C2V7G	2.7	80	20	400	1.0	150	1.0	370	-0.08	-0.05	
BZX85C3V0G	3.0	80	20	400	1.0	100	1.0	340	-0.08	-0.05	
BZX85C3V3G	3.3	80	20	400	1.0	40	1.0	320	-0.08	-0.05	
BZX85C3V6G	3.6	60	15	500	1.0	20	1.0	290	-0.08	-0.05	
BZX85C3V9G	3.9	60	15	500	1.0	10	1.0	280	-0.07	-0.02	
BZX85C4V3G	4.3	50	13	500	1.0	3.0	1.0	250	-0.05	0.010	
BZX85C4V7G	4.7	45	13	500	1.0	3.0	1.0	215	-0.03	0.040	
BZX85C5V1G	5.1	45	10	500	1.0	1.0	1.5	200	-0.01	0.040	
BZX85C5V6G	5.6	45	7.0	400	1.0	1.0	2.0	190	0	0.045	
BZX85C6V2G	6.2	35	4.0	300	1.0	1.0	3.0	170	0.010	0.055	
BZX85C6V8G	6.8	35	3.5	300	1.0	1.0	4.0	155	0.015	0.060	
BZX85C7V5G	7.5	35	3.0	200	0.5	1.0	4.5	140	0.020	0.065	
BZX85C8V2G	8.2	25	5.0	200	0.5	1.0	6.2	130	0.030	0.070	
BZX85C9V1G	9.1	25	5.0	200	0.5	1.0	6.8	120	0.040	0.075	
BZX85C10G	10	25	7.0	200	0.5	0.5	7.5	105	0.450	0.080	
BZX85C11G	11	20	8.0	300	0.5	0.5	8.2	97	0.045	0.080	
BZX85C12G	12	20	9.0	350	0.5	0.5	9.1	88	0.045	0.085	
BZX85C13G	13	20	10	400	0.5	0.5	10	79	0.050	0.085	
BZX85C15G	15	15	10	500	0.5	0.5	11	71	0.055	0.090	
BZX85C16G	16	15	15	500	0.5	0.5	12	66	0.055	0.090	
BZX85C18G	18	15	20	500	0.5	0.5	13	62	0.060	0.090	
BZX85C20G	20	10	24	600	0.5	0.5	15	56	0.060	0.090	
BZX85C22G	22	10	25	600	0.5	0.5	16	52	0.060	0.095	
BZX85C24G	24	10	25	600	0.5	0.5	18	47	0.060	0.095	
BZX85C27G	27	8.0	30	750	0.25	0.5	20	41	0.060	0.095	
BZX85C30G	30	8.0	30	1000	0.25	0.5	22	36	0.060	0.095	
BZX85C33G	33	8.0	35	1000	0.25	0.5	24	33	0.060	0.095	
BZX85C36G	36	8.0	40	1000	0.25	0.5	27	30	0.060	0.095	
BZX85C39G	39	6.0	50	1000	0.25	0.5	30	28	0.060	0.095	
BZX85C43G	43	6.0	50	1000	0.25	0.5	33	26	0.060	0.095	
BZX85C47G	47	4.0	90	1500	0.25	0.5	36	23	0.060	0.095	
BZX85C51G	51	4.0	115	1500	0.25	0.5	39	21	0.060	0.095	
BZX85C56G	56	4.0	120	2000	0.25	0.5	43	19	0.060	0.095	
BZX85C62G	62	4.0	125	2000	0.25	0.5	47	16	0.060	0.095	
BZX85C68G	68	4.0	130	2000	0.25	0.5	51	15	0.055	0.095	
BZX85C75G	75	4.0	135	2000	0.25	0.5	56	14	0.055	0.095	
BZX85C82G	82	2.7	200	3000	0.25	0.5	62	12	0.055	0.095	
BZX85C91G	91	2.7	250	3000	0.25	0.5	68	10	0.055	0.095	
BZX85C100G	100	2.7	350	3000	0.25	0.5	75	9.4	0.055	0.095	
BZX85C110G	110	2.7	450	4000	0.25	0.5	82	8.6	0.055	0.095	
BZX85C120G	120	2.0	550	4500	0.25	0.5	91	7.8	0.055	0.095	
BZX85C130G	130	2.0	700	5000	0.25	0.5	100	7.0	0.055	0.095	
BZX85C150G	150	2.0	1000	6000	0.25	0.5	110	6.4	0.055	0.095	
BZX85C160G	160	1.5	1100	6500	0.25	0.5	120	5.8	0.055	0.095	
BZX85C180G	180	1.5	1200	7000	0.25	0.5	130	5.2	0.055	0.095	
BZX85C200G	200	1.5	1500	8000	0.25	0.5	150	4.7	0.055	0.095	

Notes: (1) Measured with pulses tp = 5 ms

(2) Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case

(3) The type number listed have a standard tolerance on the nominal zener voltage of ± 5%.