

SURFACE MOUNT POSITIVE ADJUSTABLE 1.0 AMP VOLTAGE REGULATOR



Isolated Hermetic Surface Mount Package 1.0 Amp, Positive Adjustable Voltage Regulator

FEATURES

- Hermetic Isolated Surface Mount Package
- Adjustable Output Voltage
- Eliminates Stocking Fixed Voltages
- Built-In Thermal Overload Protection
- Short Circuit Current Limiting
- Product Is Available Hi-Rel Screened
- Electrically Similar To Industry Standard P/N LM117

DESCRIPTION

This three terminal positive regulator is supplied in a hermetically sealed metal surface mount package. All protective features are designed into the circuit, including thermal shutdown, current limiting and safe-area control. With heat sinking, they can deliver over 1.0 amp of output current. This unit features output voltages that can be trimmed using external resistors, from 1.2 volts to 37 volts.

ABSOLUTE MAXIMUM RATINGS

Input to Output Voltage Differential	405 V
Operating Junction Temperature Range	- 55°C to + 150°C
Storage Temperature Range	- 55°C to + 150°C
Typical Power/Thermal Characteristics:	
Rated Power @ 25°C	
T_C	17.5W
T_A	3W
Thermal Resistance:	
θ_{JC}	3.5°C/W
θ_{JA}	42°C/W
Lead Temperature at Case (5 sec)	225°C

3.5


ELECTRICAL CHARACTERISTICS $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $I_L = 8\text{mA}$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$V_{DIFF} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$	1.20	1.30	V
		$V_{DIFF} = 3.3\text{V}$	• 1.20	1.30	
		$V_{DIFF} = 40\text{V}$	• 1.20	1.30	
Line Regulation (Note 1)	R_{LINE}	$3.0\text{V} \leq V_{DIFF} \leq 40\text{V}$, $V_{out} = V_{ref}$, $T_A = 25^{\circ}\text{C}$	-9	9	mV
		$3.3\text{V} \leq V_{DIFF} \leq 40\text{V}$, $V_{out} = V_{ref}$	• -23	23	
Load Regulation (Note 1)	R_{LOAD}	$V_{DIFF} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$, $T_A = 25^{\circ}\text{C}$	-15	15	mV
		$V_{DIFF} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$	• -15	15	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 300\text{mA}$, $T_A = 25^{\circ}\text{C}$	-15	15	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 195\text{mA}$	• -15	15	
Thermal Regulation	V_{RTH}	$V_{in} = 14.6\text{V}$, $I_L = 1.5\text{A}$ $P_d = 20\text{ Watts}$, $t = 20\text{ ms}$, $T_A = 25^{\circ}\text{C}$	-16	16	mV
Ripple Rejection (Note 2)	R_N	$f = 120\text{ Hz}$, $V_{out} = V_{ref}$ $C_{Adj} = 10\text{ }\mu\text{F}$, $I_{out} = 100\text{ mA}$	• 66		dB
Adjustment Pin Current	I_{Adj}	$V_{DIFF} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$		100	μA
		$V_{DIFF} = 3.3\text{V}$	•	100	
		$V_{DIFF} = 40\text{V}$	•	100	
Adjustment Pin Current Change	I_{Adj}	$V_{DIFF} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$, $T_A = 25^{\circ}\text{C}$	-5	5	μA
		$V_{DIFF} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$	• -5	5	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 300\text{mA}$, $T_A = 25^{\circ}\text{C}$	• -5	5	
		$V_{DIFF} = 40\text{V}$, $10\text{mA} \leq I_L \leq 195\text{mA}$	• -5	5	
		$3.0\text{V} \leq V_{DIFF} \leq 40\text{V}$, $T_A = 25^{\circ}\text{C}$	-5	5	
		$3.3\text{V} \leq V_{DIFF} \leq 40\text{V}$	• -5	5	
Minimum Load Current	I_{Lmin}	$V_{DIFF} = 3.0\text{V}$, $V_{OUT} = 1.4\text{V}$ (forced)		5.0	mA
		$V_{DIFF} = 3.3\text{V}$, $V_{OUT} = 1.4\text{V}$ (forced)	•	5.0	
		$V_{DIFF} = 40\text{V}$, $V_{OUT} = 1.4\text{V}$ (forced)	•	5.0	
Current Limit (Note 2)	I_{CL}	$V_{DIFF} = 15\text{V}$	• 1.5	3.5	A
		$V_{DIFF} = 40\text{V}$, $T_A = 25^{\circ}\text{C}$	0.18	1.5	


Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

MECHANICAL OUTLINE

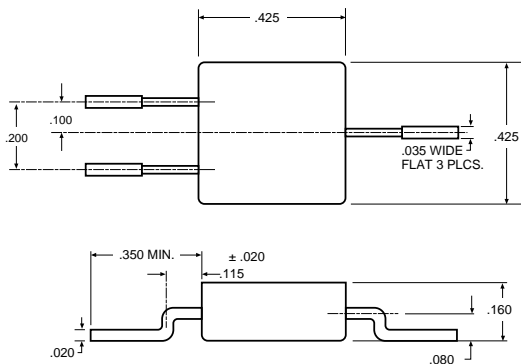

PIN CONNECTION

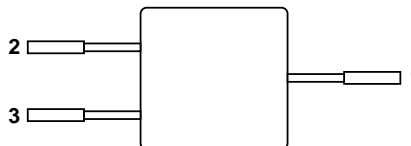

Pin 1: V_{OUT}
 Pin 2: Adjust
 Pin 3: V_{IN}
 Case: Isolated