

# SRAF1020 - SRAF10150

Isolated 10.0 AMPS. Schottky Barrier Rectifiers  
ITO-220AC




## Features

- ✧ Isolated Plastic package.
- ✧ Low power loss, high efficiency.
- ✧ High current capability, Low VF.
- ✧ High reliability
- ✧ High surge current capability.
- ✧ Epitaxial construction.
- ✧ Guard-ring for transient protection.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application

## Mechanical Data

- ✧ Cases: ITO-220AC molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Pure tin plated, lead free. solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/ .25", (6.35mm) from case.
- ✧ Weight: 2.24 grams
- ✧ Mounting torque: 5 in – 1bs. max.

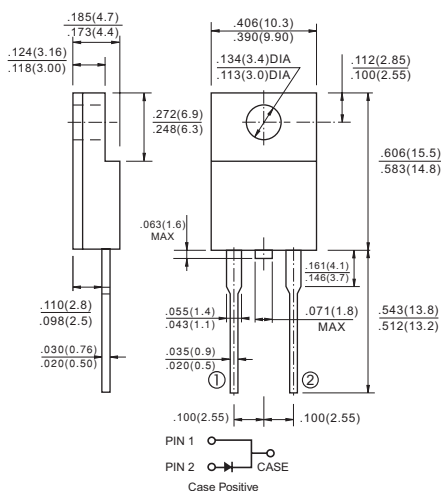

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SRAF 1020	SRAF 1030	SRAF 1040	SRAF 1050	SRAF 1060	SRAF 1090	SRAF 10100	SRAF 10150	Units	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	V	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	63	70	105	V	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	90	100	150	V	
Maximum Average Forward Rectified Current @Tc=110 °C	$I_{(AV)}$	10.0								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	200								A	
Maximum Instantaneous Forward Voltage 10.0A	$V_F$	0.55		0.70		0.85		0.95		V	
Maximum D.C. Reverse Current @ Tc=25 °C at Rated DC Blocking Voltage @ Tc=100 °C	$I_R$	0.5					0.1		5.0		mA mA
Typical Junction Capacitance (Note 2)	$C_j$	420			280		165			pF	
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	4.0								°C/W	
Operating Junction Temperature Range	$T_J$	-65 to +125				-65 to +150					°C
Storage Temperature Range	$T_{STG}$	-65 to +150								°C	

- Notes:
1. Thermal Resistance from Junction to Case Per Leg
  2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.
  3. Mounted on Heatsink Size of 2" x 3" x 0.25" Al-Plate.

## RATINGS AND CHARACTERISTIC CURVES (SRAF1020 THRU SRAF10150)

FIG.1- FORWARD CURRENT DERATING CURVE

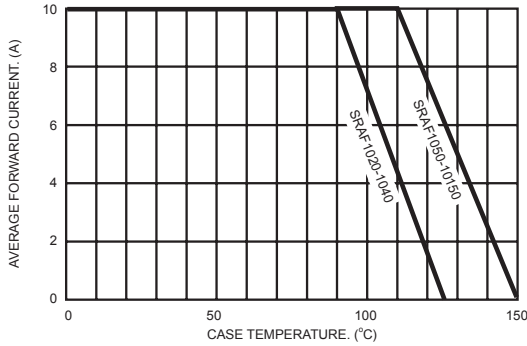


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

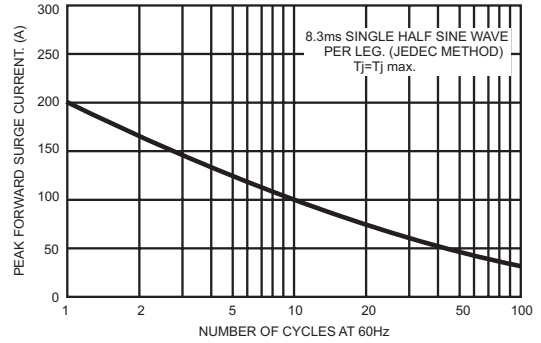


FIG.3- TYPICAL FORWARD CHARACTERISTICS

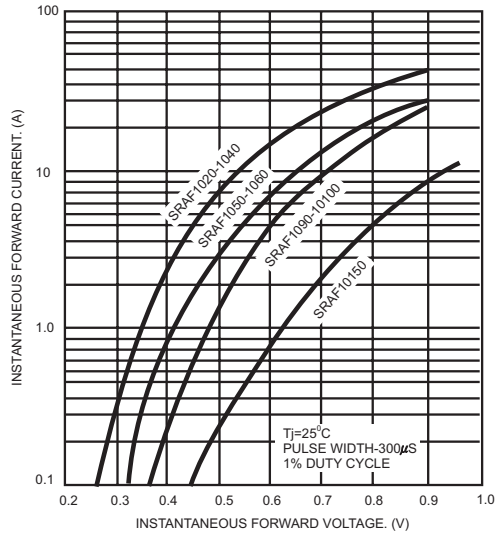


FIG.4- TYPICAL REVERSE CHARACTERISTICS

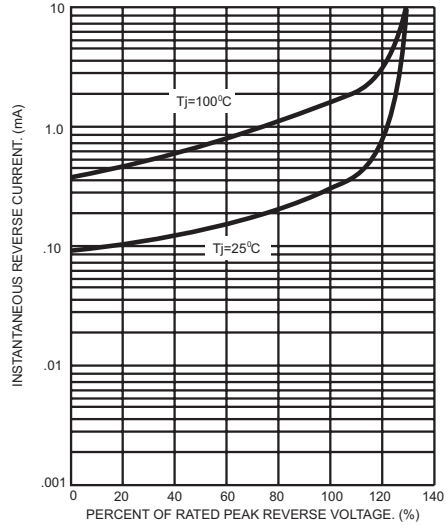


FIG.5- TYPICAL JUNCTION CAPACITANCE

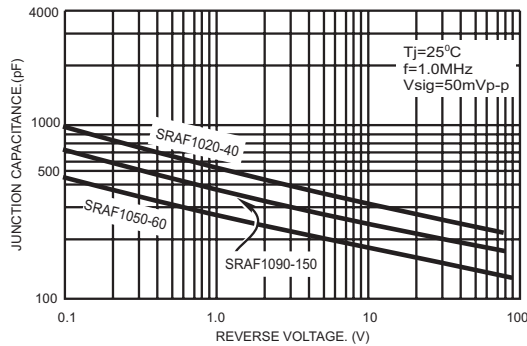


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

