

319-134 Composite EMI/RFI Ultra Low-Profile Shield Sock with Shrink Boot Porch and Self Locking Rotatable Coupling

A

CONNECTOR DESIGNATOR:	
F	MIL-DTL-38999 Series I, II
H	MIL-DTL-38999 Series III and IV
SELF-LOCKING	
ROTATABLE COUPLING	
STANDARD PROFILE	

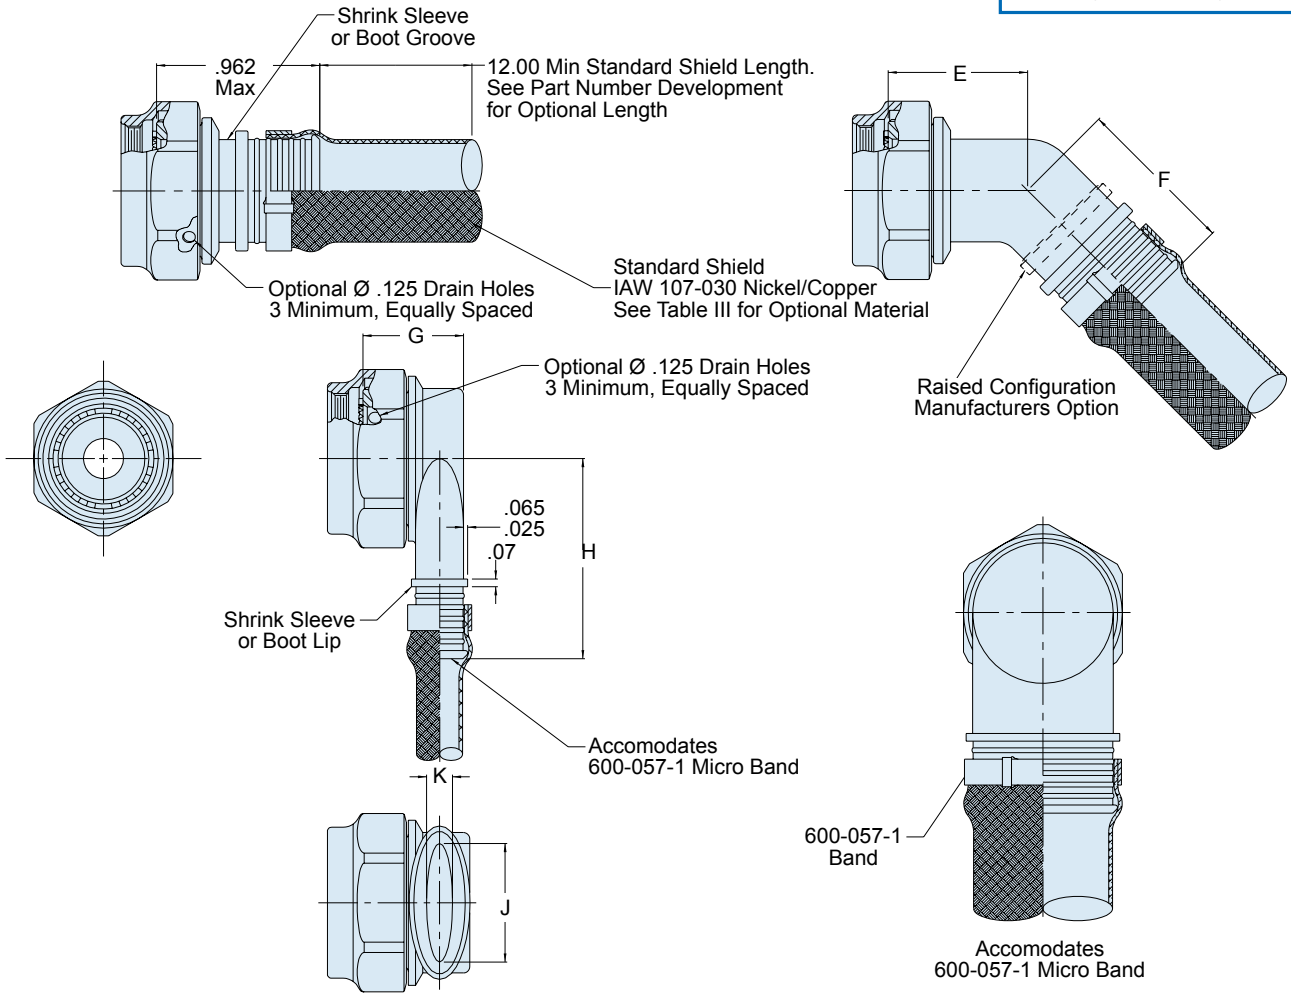
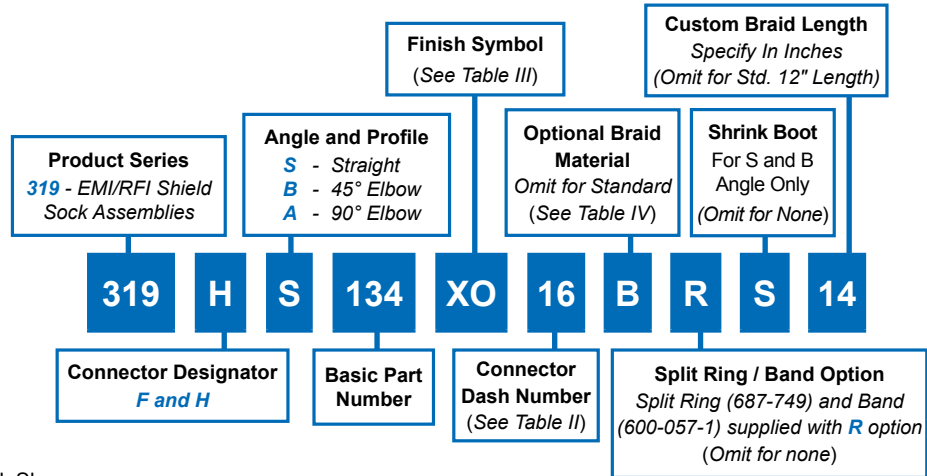


TABLE II: SHELL SIZE

Shell Size		E ± .06	F ± .09	G Max	H ± .03	J	K
F	H						
08	09	.72 (18.3)	.87 (22.1)	.63 (16.0)	1.042 (26.5)	.304 (7.7)	.160 (4.1)
10	11	.75 (19.1)	.93 (23.6)	.66 (16.8)	1.107 (28.1)	.432 (11.0)	.174 (4.4)
12	13	.75 (19.1)	1.00 (25.4)	.72 (18.3)	1.174 (29.8)	.546 (13.9)	.195 (5.0)
14	15	.76 (19.3)	1.03 (26.2)	.83 (21.1)	1.241 (31.5)	.670 (17.0)	.315 (8.0)
16	17	.78 (19.8)	1.05 (26.7)	.91 (23.1)	1.305 (33.1)	.796 (20.2)	.385 (9.8)
18	19	.79 (20.1)	1.06 (26.9)	.93 (23.6)	1.371 (34.8)	.902 (22.9)	.445 (11.3)
20	21	.82 (20.8)	1.09 (27.7)	1.04 (26.4)	1.438 (36.5)	1.027 (26.1)	.525 (13.3)
22	23	.86 (21.8)	1.13 (28.7)	1.12 (28.4)	1.505 (38.2)	1.152 (29.3)	.595 (15.1)
24	25	.89 (22.6)	1.16 (29.5)	1.18 (30.0)	1.572 (39.9)	1.276 (32.4)	.655 (16.6)

TABLE III: FINISH

Symbol	Finish Description
XM	2000 Hour Corrosion Resistant Electroless Nickel
XMT	2000 Hour Corrosion Resistant Ni-PTFE, Nickel-Fluorocarbon Polymer. <i>1000 Hour Grey™</i>
XW	2000 Hour Corrosion Resistant Cadmium Olive Drab Over Electroless Nickel

TABLE IV: BRAID TYPE

Symbol	Braid Type
A	100% AmberStrand®
B	75%/25% AmberStrand® Blend
Standard	Nickel/Copper 34awg
T	Tin/Copper 34awg

NOTES

1. 770-001S**-0 shrink boot supplied with T option. See shrink boot product page for more details.
2. Coupling nut supplied unplated.
3. See Table I in Intro for front end dimensional details.