

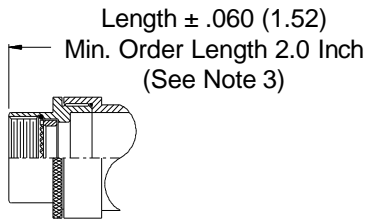
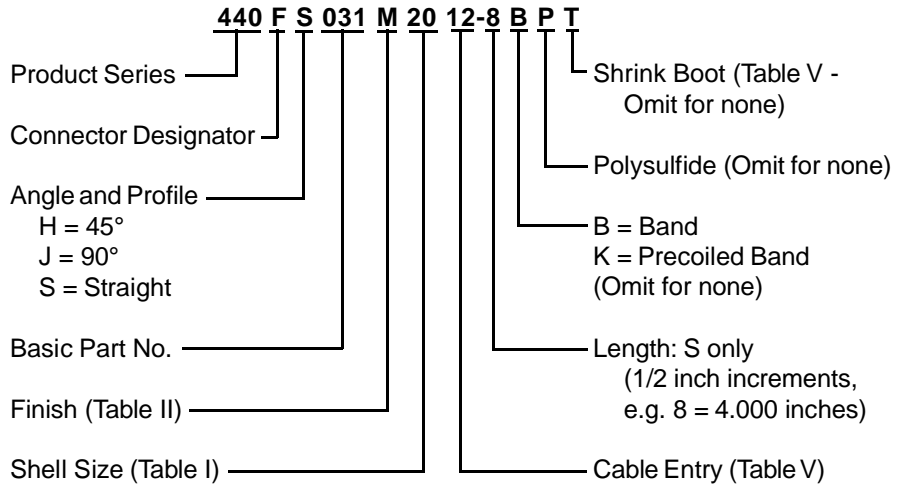
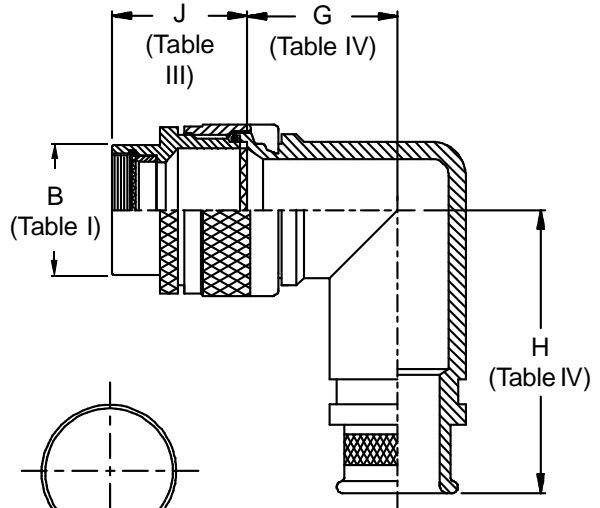



CONNECTOR DESIGNATORS
A-B*-C-D-E-F
G-H-J-K-L-S
 * Conn. Desig. B See Note 5
DIRECT COUPLING

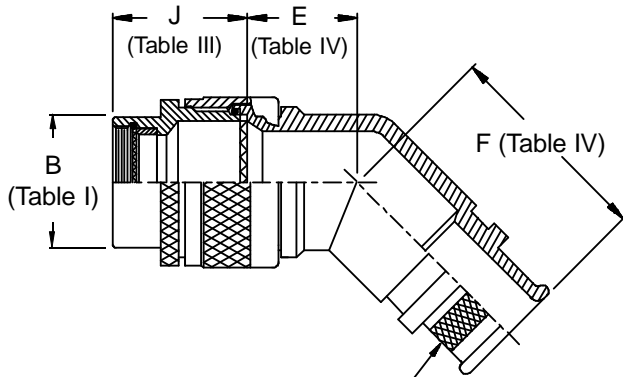

STYLE 2 (STRAIGHT)
 See Note 1)

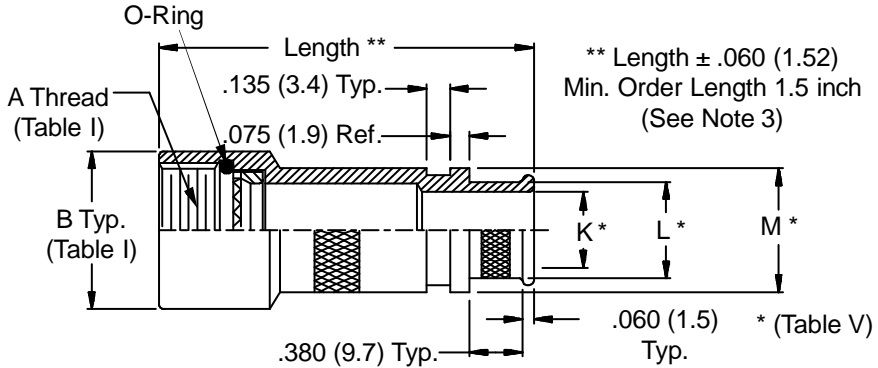

Termination Area Free of Cadmium. Knurl or Ridges Mfr's Option



Polysulfide Stripes
 P Option

Band Option
 (K Option Shown - See Note 6)

440-031
EMI/RFI Banding and Shrink Boot Adapter
Direct Coupling - Standard Profile



See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: FRONT ADAPTER			
Shell Size	J Max - Conn. Designator		
	A-E-F		
	J-H-L-S	D-B-G-K	C
08/09	1.180 (30.0)	1.250 (31.8)	
10/11	1.180 (30.0)	1.250 (31.8)	
12/13	1.180 (30.0)	1.250 (31.8)	1.735 (44.1)
14/15	1.180 (30.0)	1.250 (31.8)	1.915 (48.6)
16/17	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
18/19	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
20/21	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
22/23	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
24/25	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
28/29	1.610 (40.9)	1.560 (39.6)	1.915 (48.6)
32/33	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
36	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
40	1.610 (40.9)	2.190 (55.6)	1.915 (48.6)

TABLE IV: ELBOW DIMENSIONS									
Dash No.(s)	E Max		F Max		G Max		H Max		
01	.625	(15.9)	.940	(23.9)	.732	(18.6)	1.078	(27.4)	
02 & 31	.625	(15.9)	.940	(23.9)	.732	(18.6)	1.078	(27.4)	
03 & 32	.688	(17.5)	1.000	(25.4)	.757	(19.2)	1.108	(28.1)	
04 & 33	.711	(18.1)	1.050	(26.7)	.781	(19.8)	1.128	(28.7)	
05 & 34	.781	(19.8)	1.150	(29.2)	.825	(21.0)	1.178	(29.9)	
06 & 35	.841	(21.4)	1.188	(30.2)	.896	(22.8)	1.190	(30.2)	
07 & 36	.866	(22.0)	1.208	(30.7)	1.093	(27.8)	1.250	(31.8)	
08 & 37	.893	(22.7)	1.248	(31.7)	1.250	(31.8)	1.320	(33.5)	
09 & 38	.916	(23.3)	1.278	(32.5)	1.312	(33.3)	1.380	(35.1)	
10	1.134	(28.8)	1.448	(36.8)	1.375	(34.9)	1.500	(38.1)	
11	1.134	(28.8)	1.448	(36.8)	1.375	(34.9)	1.500	(38.1)	
12	1.185	(30.1)	1.488	(37.8)	1.687	(42.8)	1.620	(41.1)	
13	1.185	(30.1)	1.488	(37.8)	1.687	(42.8)	1.620	(41.1)	
14	1.225	(31.1)	1.538	(39.1)	1.812	(46.0)	1.750	(44.5)	
15	1.225	(31.1)	1.538	(39.1)	1.812	(46.0)	1.750	(44.5)	

TABLE V: CABLE ENTRY							
Dash No.	K		L		M		Shrink Boot *
01	.125	(3.2)	.250	(6.4)	.312	(7.9)	n/a
31	.188	(4.8)	.312	(7.9)	.374	(9.5)	202K121-25-0
02	.250	(6.4)	.375	(9.5)	.437	(11.1)	202K121-25-0
32	.312	(7.9)	.438	(11.1)	.500	(12.7)	202K121-25-0
03	.375	(9.5)	.500	(12.7)	.562	(14.3)	202K121-25-0
33	.438	(11.1)	.562	(14.3)	.624	(15.8)	202K132-25-0
04	.500	(12.7)	.625	(15.9)	.687	(17.4)	202K132-25-0
34	.562	(14.3)	.688	(17.5)	.750	(19.1)	202K132-25-0
05	.625	(15.9)	.750	(19.1)	.812	(20.6)	202K132-25-0
35	.688	(17.5)	.812	(20.6)	.874	(22.2)	202K142-25-0
06	.750	(19.1)	.875	(22.2)	.937	(23.8)	202K142-25-0
36	.812	(20.6)	.938	(23.8)	1.000	(25.4)	202K153-25-0
07	.875	(22.2)	1.000	(25.4)	1.062	(27.0)	202K153-25-0
37	.938	(23.8)	1.062	(27.0)	1.124	(28.5)	202K153-25-0
08	1.000	(25.4)	1.125	(28.6)	1.187	(30.1)	202K153-25-0
38	1.062	(27.0)	1.188	(30.2)	1.250	(31.8)	202K163-25-0
09	1.125	(28.6)	1.250	(31.8)	1.312	(33.3)	202K163-25-0
10	1.250	(31.8)	1.375	(34.9)	1.437	(36.5)	202K163-25-0
11	1.375	(34.9)	1.500	(38.1)	1.562	(39.7)	202K174-25-0
12	1.500	(38.1)	1.625	(41.3)	1.687	(42.8)	202K174-25-0
13	1.625	(41.3)	1.750	(44.5)	1.812	(46.0)	202K174-25-0
14	1.750	(44.5)	1.875	(47.6)	1.937	(49.2)	202K185-25-0
15	1.875	(47.6)	2.000	(50.8)	2.062	(52.4)	202K185-25-0
16	2.000	(50.8)	2.125	(54.0)	2.187	(55.5)	202K185-25-0

* Raychem Shrink Boot Supplied with "T" Option (see Part Number Development)

1. When maximum cable entry (page 22) is exceeded, Style 2 will be supplied. (Function S only).
2. Metric dimensions (mm) are indicated in parentheses.
3. Consult factory for shorter lengths on straight backshells.
4. See page 40 for Shrink Boot Reference Information.
5. When using Connector Designator B refer to pages 18 and 19 for part number development.
6. Backshells supplied with 600-052-* band, see Glenair Series 600 Tool Catalog for installation.