



1. Dimensions:

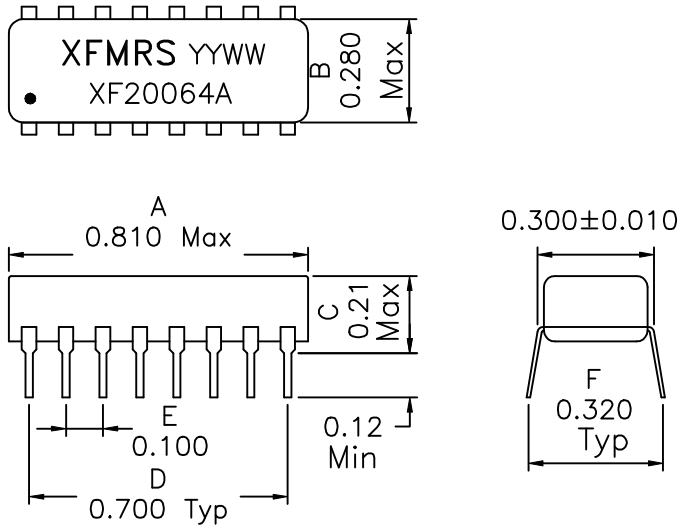

2. Schematic:

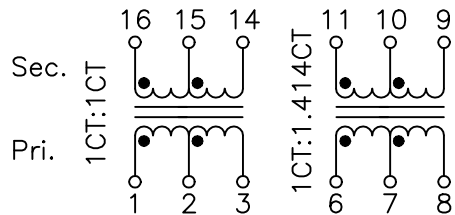

3. Electrical Specifications:@25°C

- Isolation: 1500 Vrms
- Turns Ratio: (1-2-3:16-15-14) 1CT:1CT ±5%
- Turns Ratio: (6-7-8:11-10-9) 1CT:1.414CT ±5%
- PRI OCL: 200 ±20%uH @100KHz 50mV
- Cw/w: 15pF Maximum (PRI/SEC) @100KHz 50mV
- PRI LL: 0.30uH Maximum @100KHz 50mV SEC Shorted
- DC Resistance: 0.40 Ohm Max. (PRI & SEC)

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

DOC. REV: B/2

XFMRs Inc	Title: 10 BASE-T ISOLATION MAGNETICS		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010 inch Dimensions in INCH	P/N: XF20064A	REV. B
	DWN.	廖玉坤	Dec-07-00
	CHK.	李清儿	Dec-07-00
SCALE 2:1 SHT 1 OF 1	APP.	BW	Dec-07-00