


JMK, Inc

ZF-1543-3.5B

Operating Voltage = 115 / 250 VAC
Operating Current = 3.5 Ampere
Temperature Range (Storage) = -40 to 125 C
Temperature Range (Operating) = -40 to 50 C
Dielectric Withstand (L-Grd), (1 Minute) = 1500 VAC
Dielectric Withstand (L-L), (1 Minute) = 1500 VDC



Order P/N: ZF-1543-3.5B

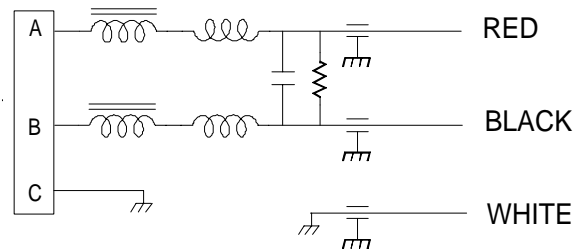

The ZF-1543-3.5B filter has been designed for systems operating under the requirements of MIL-STD-461C and or tempest applications.

The filter case is environmentally sealed and is designed to handle the shock and vibration of wheeled vehicle installations.

The circuit uses feed through capacitors the insertion loss is 60 db to 1.0 Ghz and beyond.

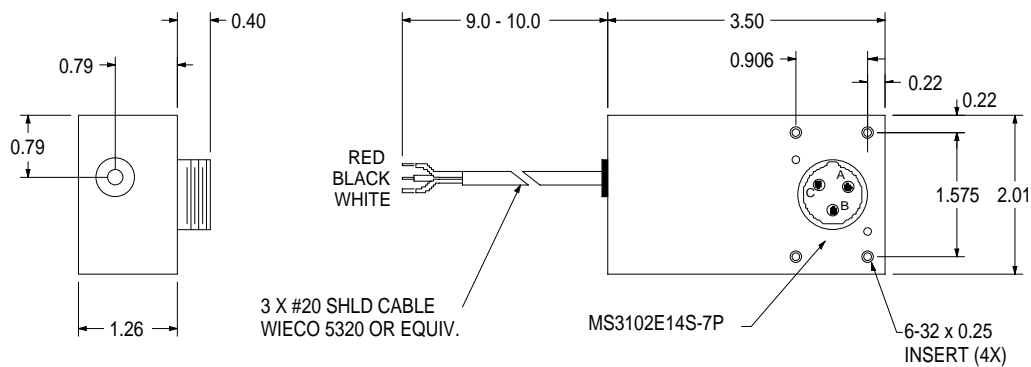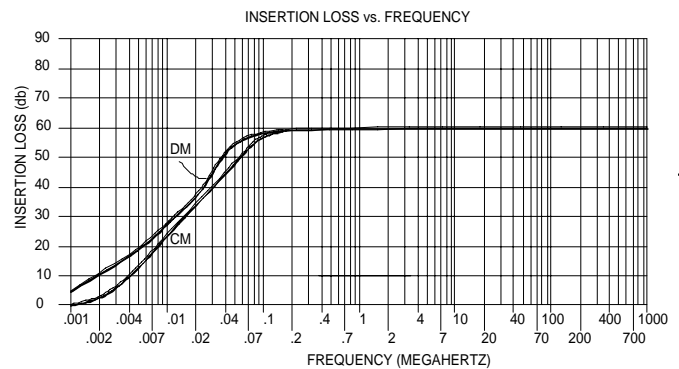

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
email: info@jmkfilters.com
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141-589-1884