


<b>SILICON BRIDGE RECTIFIERS</b>	<b>REVERSE VOLTAGE - 50 to 1000Volts</b> <b>FORWARD CURRENT - 10/15/25/35/50 Amperes</b>
----------------------------------	---

**FEATURES**

- Surge overload -240~500 amperes peak
- Low forward voltage drop
- Mounting position: Any
- Electrically isolated base -2000 Volts
- Solderable 0.25" FASTON terminals
- Materials used carries U/L recognition

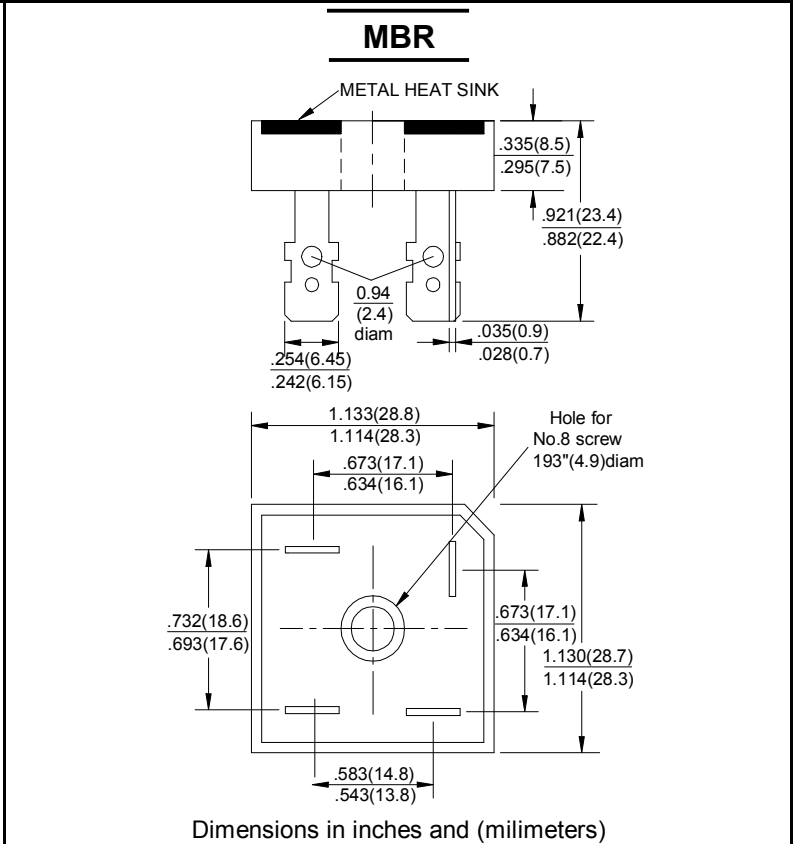

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
 Resistive or inductive load 60HZ.  
 For capacitive load current by 20%

CHARACTERISTICS	SYMBOL									UNIT
		MBR 10005	MBR 1001	MBR 1002	MBR 1004	MBR 1006	MBR 1008	MBR 1010		
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000		V
Maximum RMS Bridge Input Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700		V
Maximum Average Forward Rectified Output Current @T <sub>c</sub> =55°C	I <sub>(AV)</sub>	10	15	25	35	50				A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	I <sub>FSM</sub>	240	300	400	400	500				A
Maximum Forward Voltage Drop Per Element at 5.0/7.5/12.5/17.5/25.0 Peak	V <sub>F</sub>	1.1								V
Maximum Reverse Current at Rated DC Blocking Voltage Per Element @T <sub>A</sub> =25°C	I <sub>R</sub>	10.0								µA
Operating Temperature Rang	T <sub>J</sub>	-55 to +125								°C
Storage Temperature Rang	T <sub>STG</sub>	-55 to +125								°C

# RATING AND CHARACTERISTIC CURVES

## MBR10/15/25/35/50A SERIES

FIG.1-MAXIMUM FORWARD SURGE CURRENT

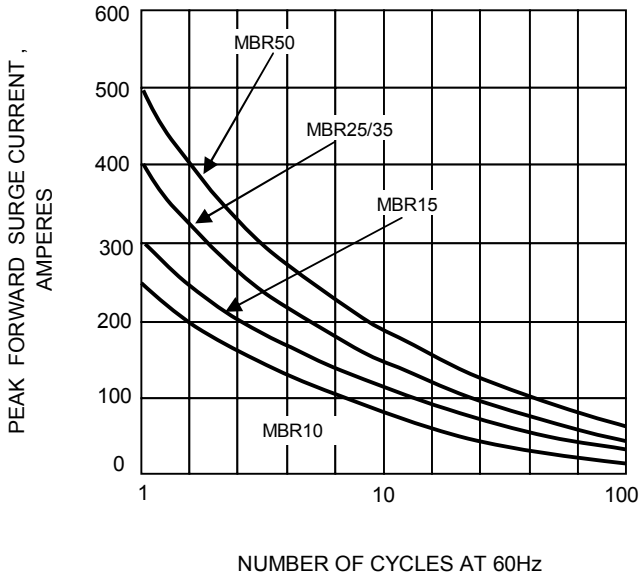


FIG.2- DERATING CURVE  
OUTPUT RECTIFIED CURRENT

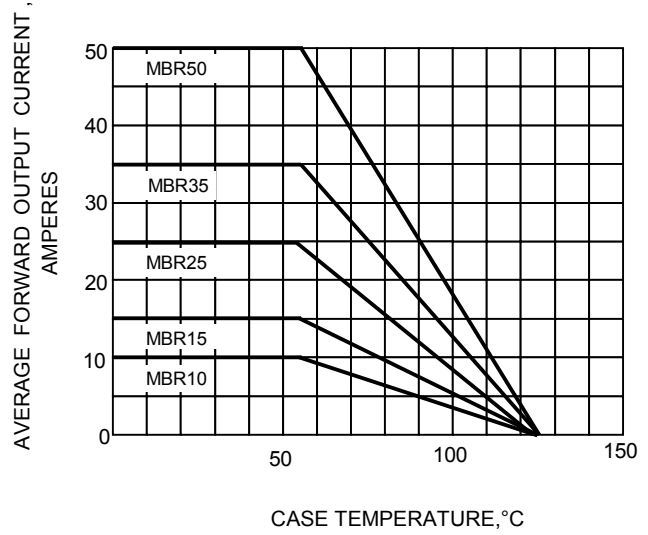


FIG.4-TYPICAL FORWARD CHARACTERISTICS

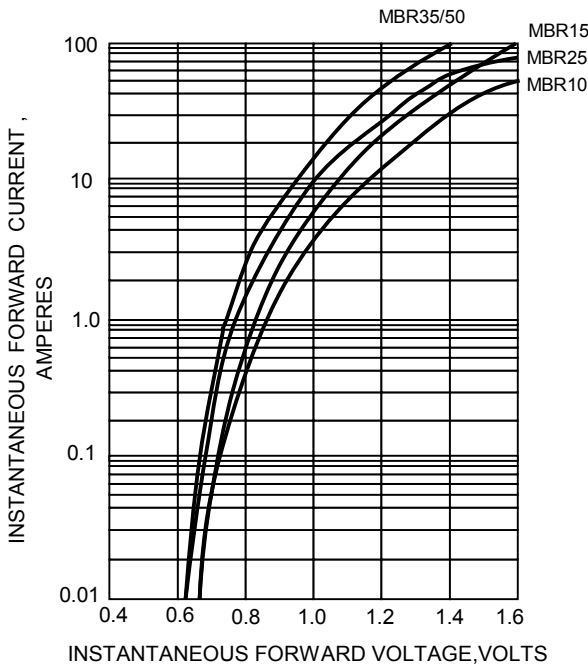


FIG.5-TYPICAL REVERSE CHARACTERISTICS

