


## NX8045GD (J Lead Type)

For Car Electronics

### ■ Features

A small surface-mount type crystal unit, ideal for an engine control CPU clock; delivering the high reliability that is particularly demanded by car electronics. Compatible with low frequencies starting from 5MHz.(8.0 × 4.5 × 2.0mm typ.)

- Stable start-up characteristic even under extremely severe environmental conditions.
- Excellent environmental characteristics, including heat, vibration and shock resistance.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- Excellent performance for wide temperature range heat cycles (-40 to +125 ° C) when mounted on a glass epoxy circuit board.
- Conforms to AEC-Q200.

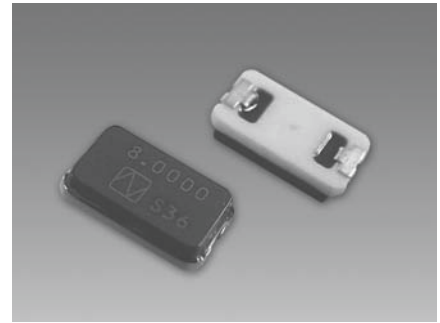

RoHS Compliant  
Directive 2002/95/EC

### ■ Specifications

Item	Model	NX8045GD (J Lead)
Frequency Range		5 to 40MHz
Overtone Order		Fundamental
Frequency Tolerance (25 ±3°C)		±50 × 10 <sup>-6</sup>
Temperature Characteristics (with reference to +25°C)		±150 × 10 <sup>-6</sup>
Operating Temperature Range		-40 to +125°C
Equivalent Series Resistance		Refer to *1
Drive Level		10μW(Max:500μW)
Load Capacitance		8pF

The above specifications are standard for this NDK product.

Custom-made specifications such as load capacitance and temperature characteristics are also available.

Please contact NDK sales with your enquiries.


### ■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following :

Model name - Frequency (Max : 9 digits) M - Number for specifying an order      Example NX8045GD-10.000M-STD-CJJ-1

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).

### ■ Dimensions

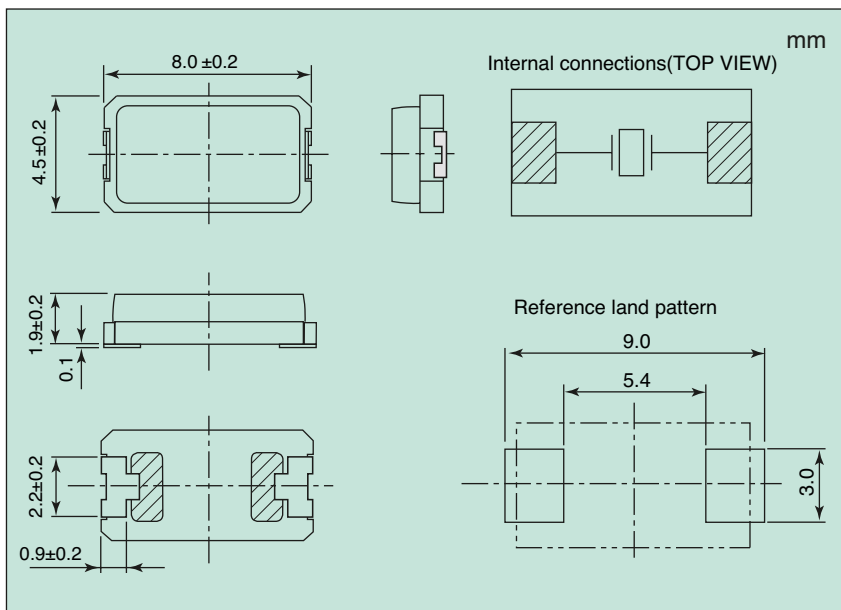

\*1 Equivalent Series Resistance

Frequency (MHz) (Range)	Equivalent Series Resistance max.[Ω]
5 to 8	300
8 to 10	220
10 to 20	150
20 to 40	100