

**APPLIED  
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453  
Tully, New York 13159-0453  
Phone: (315) 696-6676 Fax: (315) 696-9923  
www.acipower.com

**AC5-24-1016**

*PRELIMINARY DATA SHEET*

10/6/99

**CCFL INVERTER**  
*(For Multiple Tube Applications)*

The AC5-24-1016 is designed to power 8 CCFL's to a nominal power level of 22 watts.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 5 of CON1.

Enable control is accomplished at pin 3 of CON1 (0V=off, 5V=on).

All outputs are open and short circuit protected.

Meets nominal drive requirements for Landmark 8 tube backlight BL-C053G


**Specifications:**

- Vin = +24V +/- 10%
- CCFL strike voltage = 1200Vrms @ Vin=24V
- CCFL tube current = 7.0mA/tube @ 100% intensity/Vin=24V)
- Recommended CCFL sustaining voltage = 300Vrms - 500Vrms
- Nominal tube current frequency = 42khz +/- 10%
- Nominal pwm frequency = 98Hz +/- 3%
- Pwm duty cycle range = 0 to 100%
- Average electrical efficiency >90%
- External PWM signal input control via enable pin
- Output PWM sync signal @ pin 6 of CON1

**Additional control capability:\***

- Supports multiple units ie:Master/Slave(s)
- Synchronization to display frame-rate
- Low power sleep-mode and soft-start
- UL 1950 Recognized

\* Please contact factory for information

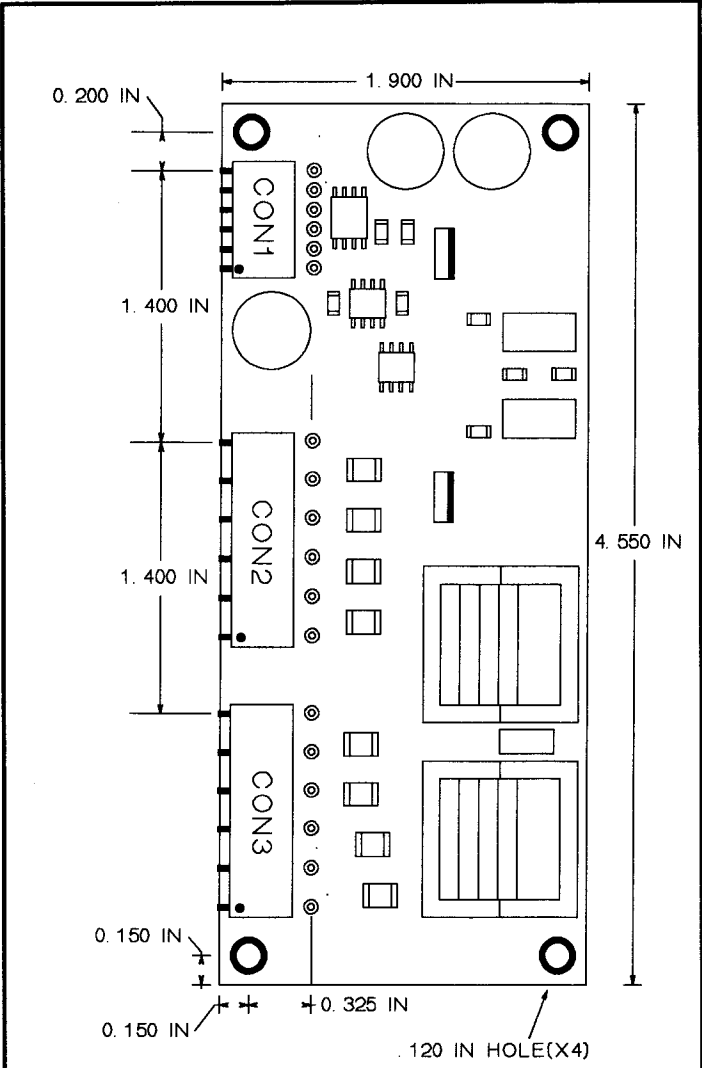

PROFILE = .560 IN

CON1 MOLEX 22-28-3060		CON2(CON3) MOLEX 22-28-3110	
PIN #		PIN #	
1	+12V	1	NC
2	GND	2	NC
3	ENABLE	3	CCFL 1(2)
4	LOGIC HI	4	NC
5	VCNTL	5	CCFL 3(4)
6	PWM OUT	6	NC
		7	CCFL 5(6)
		8	NC
		9	CCFL 7(8)
		10	NC
		11	CCFL COMMON