

# Encoder 10mm Size Hollow Shaft Type

EC10E Series



A series of compact and long-life encoders with unique hollow shaft design.

Detector

Push

Slide

Rotary


Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Custom-  
Products

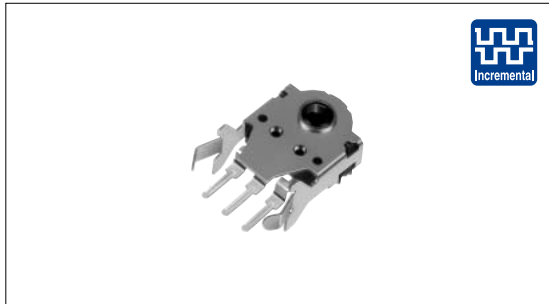

## Typical Specifications

Items	Specifications
Rating	1mA 5V DC
Operating life	100,000cycles

## Product Line

Mount height (mm)	Detent torque (mN·m)	Number of detent	Number of pulse	Operating direction	Minimum order unit(pcs.)	Product No.
7	5 ± 3	24	12	Horizontal	1,600	EC10E1220505
9						EC10E1220501
11						EC10E1220503

## Dimensions





Unit:mm

Style	PC board mounting hole dimensions

Incremental  
Type

Absolute  
Type

## List of Varieties

Type	Hollow shaft		Magnetic				
	5mm size	10mm size	11mm size	20mm size			
Series	EC05E	EC10E	EM11B	EM20B			
Detector							
Push							
Slide	Incremental						
Rotary Encoders Power Dual-in-line Package Type TACT Switch™ Custom-Products	Outline specifications	Shaft types		Single-shaft			
		Operating direction		Vertical			
		Number of pulse/ Number of detent		12/12	12/24	16/16	40/40
		Push switch (Travel mm)		Without		With( 0.5 )	Without/With( 0.5 )
		Optional functions				Display function	
		Changeover angle					
Dimensions (mm)	W	5.7	9.8	10.8	20		
	D	2.7	12.6	11	22.25		
	H	6.5	4.4	7.5	13		
Soldering	Manual soldering	350 max. 3s max.					
	Dip soldering	—	260 ± 5 , 3 ± 1s	260 max. 3s max.			
	Reflow soldering	Please see P.189					
Operating temperature range	- 30 to + 85			-10 to + 70			
Maximum operating current( resistive load)	0.55mA	1mA	V <sub>HI</sub> : + 4.0V min. V <sub>LO</sub> : 0.5V max. ( Isink=5mA )				
Incremental Type Absolute Type	Electrical performance	Output signal		Output of A and B signals, proportionate to phase difference			
		Output type		A,B( Square wave )			
		Instulation resistance		Incremental			
		Voltage proof		50M min. 50V DC	100M min. 100V DC	100M min. 250V DC	
Mechanical performance	Rotational torque		7mN·m max.				
	Detent torque		1.6 ± 1.3mN·m	5 ± 3mN·m	10 ± 5mN·m		
	Push-pull strength		100N				
Environmental performance	Cold		- 40 ± 3 for 240h	- 40 ± 3 for 96h	- 30 ± 3 for 240h		
	Dry heat		85 ± 3 for 240h	85 ± 3 for 96h	80 ± 3 for 240h		
	Damp heat		40 ± 2 , 90 to 95%RH for 240h	40 ± 2 , 90 to 95%RH for 96h	40 ± 2 , 90 to 95%RH for 240h		
Page	195	198	199	200			

### Push-on Switch Specifications

Items	EM11B	EM20B
Contact arrangement	Single pole and single throw( Push-on )	
Travel( mm )	0.5 <sup>+ 0.3</sup> <sub>- 0.2</sub>	0.5 <sup>+ 0.4</sup> <sub>- 0.3</sub>
Operating force ( N )	5.5 ± 3	6 ± 3
Rating	5mA 5V DC ( 50mA 12V DC )	
Contact resistance	500m max for initial period;5 max after operating life	100m max for initial period;200m max after operating life
Operating life	1,000,000times min.	
	25,000times min.	

Encoders Attached Parts .....	209
Encoders Cautions .....	210, 211

### Note

※ The operating temperature range for automotive applications can be raised upon request. Please contact us for requirements of this kind.