

NT90TP(T92)



32.4(50)×27×28.5



CH0050401-2000 CE E9930952



E174722



R2033977.07



LR956331

Features

- Small size, light weight. Low coil power consumption, heavy contact load. Strong anti-shock and anti-vibration, high reliability, long life.
- Suitable for automobile, machine, electronic equipment, air conditioner and household appliance applications.

Contact Data

Contact Arrangement	1A, 1B, 1C		
Contact Material	Ag·CdO Ag·SnO ₂ Ag·SnO ₂ ·In ₂ O ₃		
Contact Rating (resistive)	NO:30A/240VAC,14VDC; NC:20A/240VAC ;30A/14VDC NO;40A/250VAC,28VDC; NC:30A/250VAC,28VDC (0.9W)		
Max. Switching Power	1100W	7200VA	
Max. Switching Voltage	110VDC	250VAC	Max. Switching Current40A
Contact Resistance or Voltage drop	30mΩ Max		Item 3.12 of IEC255-7
Operation life	Electrical	10 ⁵	Item 3.30 of IEC255-7
	Mechanical	10 ⁷	Item 3.31 of IEC255-7

Coil Parameter

DC Coil Parameter							AC Coil Parameter			
Coil voltage VDC		Coil resistance Ω±10%	Pick up voltageE VDC(max) (75%of rated voltage)	Release voltage VDC(min) (10%of rated voltage)	Coil power W	Operate Time ms Max	Release Time ms Max	Rated voltage VAC	Coil resistance Ω±10%	Coil power
Rated	Max									
3	3.9	10/15	2.25	0.3	0.9/0.6	15	10	12	(27)	2VA
5	6.5	28/42	3.75	0.5				24	(120)	
6	7.8	40/60	4.50	0.6				110	(2360)	
9	11.7	90/135	6.75	0.9				120	(3040)	
12	15.6	160/240	9.00	1.2				220	(13490)	
15	19.5	250/375	10.25	1.5						
18	23.4	360/540	13.50	1.8						
24	31.2	640/960	18.00	2.4						
48	62.4	2560/3840	36.00	4.8						
110	143	13445/20167	82.50	11.0						

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition

Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC255-5
Dielectric Strength		
Between contacts	50Hz 1500V	Item 6 of IEC255-5
Between contact and coil	50Hz 2500V	Item 6 of IEC255-5
Shock resistance	200m/s ² 11ms	IEC68-2-27 Test Ea method 1
Vibration resistance	10~55Hz double amplitude 1.5mm	IEC68-2-6 Test Fc
Terminals strength	10N	IEC68-2-21 Test Ua1
Solderability	230 °C± 2 °C 10± 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-55~100 °C -55~125 °C	
Relative Humidity	85% (at 40 °C)	IEC68-2-3Test Ca
Mass	37g	

Qualification inspection:

Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

Ordering Information

NT90TP H A S DC12V C B 0.9

Coil power consumption:0.6:0.6W, 0.9:0.9W, 2:2VA

Resist heat class :B:130°C, F:155°C

Contact material :Ni:Ag·SnO₂·In₂O₃, C:Ag·CdO, S:Ag·SnO₂

Coil rated Voltage
DC:3V, 5V, 6V, 9V, 12V, 15V, 18V, 24V, 48V, 110V
AC:12V, 24V, 110V, 120V, 220V


S:Sealed type, D:Dust Cover, E:Covered , O:Open type

Contact Arrangement :A:1A, B:1B, C:1C

H:30A, NL:40A, Heavy load


Part number:NT90TP (T92)

Dimensions (Unit: mm)

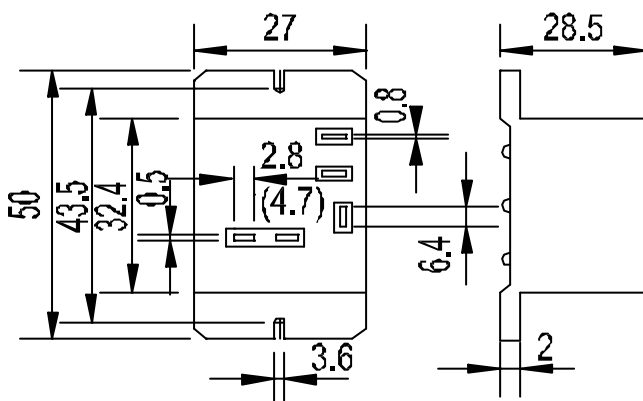

mm	inch
0.5	0.020
0.8	0.031
2.8	0.110
3.6	0.142
4.7	0.185
6.4	0.252
27	1.063
28.5	1.122
32.4	1.275
43.5	1.713
50	1.969

Dimensions

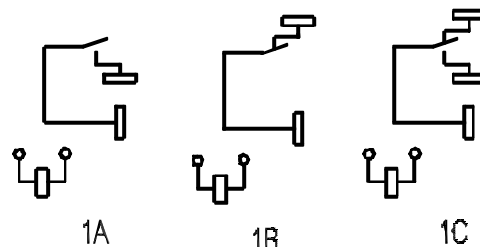

Wiring diagram

NOTES 1).Dimensions are in millimeter.

2).Inch equivalents are given for general information only.

Reference Data

