


Si photodiode

S6428-01, S6429-01, S6430-01, S7505-01

RGB color sensor

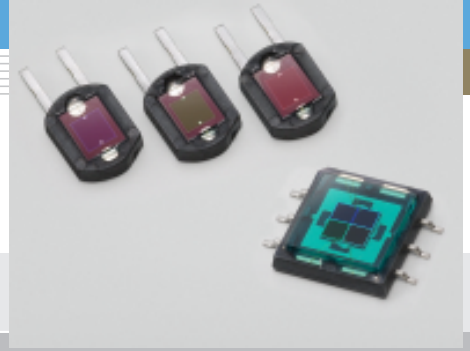

S6428-01, S6429-01 and S6430-01 are color sensors designed to respectively detect monochromatic colors of blue ($\lambda_p=460$ nm), green ($\lambda_p=540$ nm) and red ($\lambda_p=660$ nm).

S7505-01 use a 3-channel (RGB) photodiode having blue, green and red sensitivities, and is molded into a surface-mountable package.

Features

S6428-01, S6429-01, S6430-01

- Plastic package (6 × 8 mm)
- Spectral response range
 - S6428-01: 400 to 540 nm ($\lambda_p=460$ nm)
 - S6429-01: 480 to 600 nm ($\lambda_p=540$ nm)
 - S6430-01: 590 to 720 nm ($\lambda_p=660$ nm)
- Insensitive to near IR range
- High sensitivity
 - S6428-01: 0.22 A/W Typ. ($\lambda=\lambda_p$)
 - S6429-01: 0.27 A/W Typ. ($\lambda=\lambda_p$)
 - S6430-01: 0.45 A/W Typ. ($\lambda=\lambda_p$)
- Low dark current

S7505-01

- 3 ch (RGB) Si photodiode
- Surface mountable plastic package (9 × 9.6 mm)
- High sensitivity

Applications

- White balance adjustment
- Color identification
- Projector and TV brightness level detection
- Color control
- Light source color temperature detection

General ratings / Absolute maximum ratings


Type No.	Dimensional outline	Active area size (mm)	Effective active area (mm ²)	Absolute maximum ratings		
				Reverse voltage V _R Max. (V)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)
S6428-01	①	2.4 × 2.8	6.7	10	-10 to +60	-20 to +70
S6429-01						
S6430-01						
S7505-01	②	Green, red: 1.5 × 1.5 Blue : 1.5 × 1.5 (2 elements)	Green, red: 2.25 Blue : 4.5			

Electrical and optical characteristics (Typ. T_a=25 °C, unless otherwise noted)

Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λ_p (nm)	Photo sensitivity S $\lambda=\lambda_p$ (A/W)	Dark current I _D V _R =1 V		Temp. coefficient of I _D (times/°C)	Rise time t _r V _R =0 V R _L =1 k Ω 10 to 90 % (μ s)	Terminal capacitance C _t V _R =0 V f=10 kHz		Spectral response half width FWHM *2 (nm)
				Typ. (pA)	Max. (pA)			Typ. (pF)	Max. (pF)	
S6428-01	400 to 540	460	0.22	5	20	1.12	0.5	200	400	90
S6429-01	480 to 600	540	0.27							70
S6430-01	590 to 720	660	0.45							90
S7505-01	Blue	400 to 540	460	0.18	10 *1	200 *1		150	300	90
	Green	480 to 600	540	0.23						60
	Red	590 to 720	620	0.16						70

*1: All elements.

*2: Defined as shown in the figure at right.




KSPDC0031EA

SOLID STATE DIVISION


Si photodiode S6428-01, S6429-01, S6430-01, S7505-01

■ Spectral response (S6428-01, S6429-01, S6430-01)

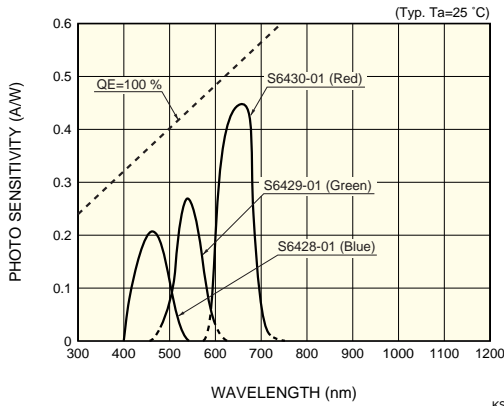


KSPDB0141EC

■ Spectral response (S7505-01)

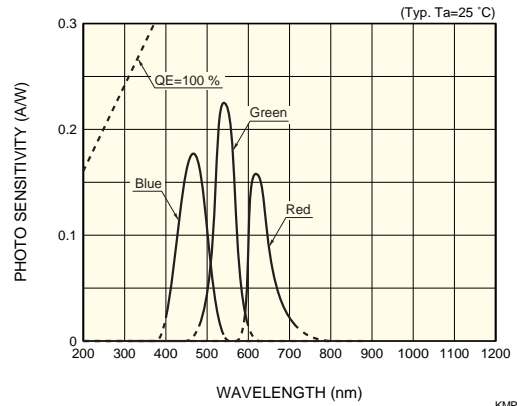


KMPDB0217EA

■ Dark current vs. reverse voltage

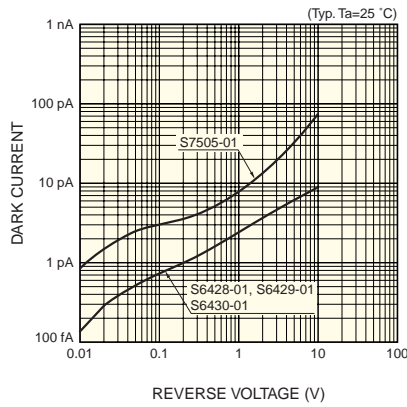

KSPDB0142EC


■ Terminal capacitance vs. reverse voltage

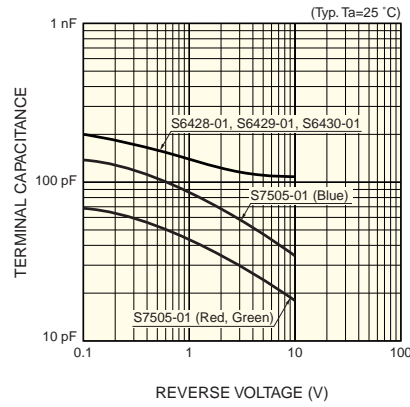

KSPDB0143EC


■ Dimensional outlines (unit: mm)

① S6428-01, S6429-01, S6430-01

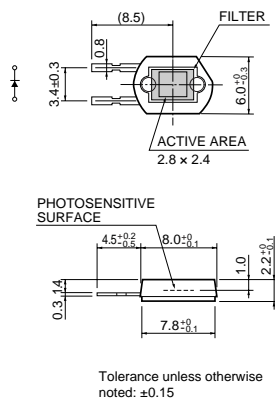

KSPDA0066EA

② S7505-01

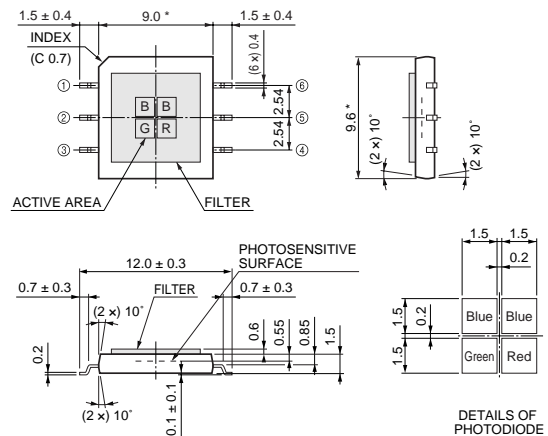

- ① ANODE (Blue)
 - ② CATHODE COMMON
 - ③ ANODE (Green)
 - ④ ANODE (Red)
 - ⑤ CATHODE COMMON
 - ⑥ NC
- Tolerance unless otherwise noted: ± 0.1
Chip position accuracy with respect to the package: dimensions marked *
 $X, Y \leq \pm 0.2$
 $\theta \leq \pm 2^\circ$

KMPDA0073ED

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2003 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Twin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KSPD1013E04
Jul. 2003 DN