



1. Dimensions:

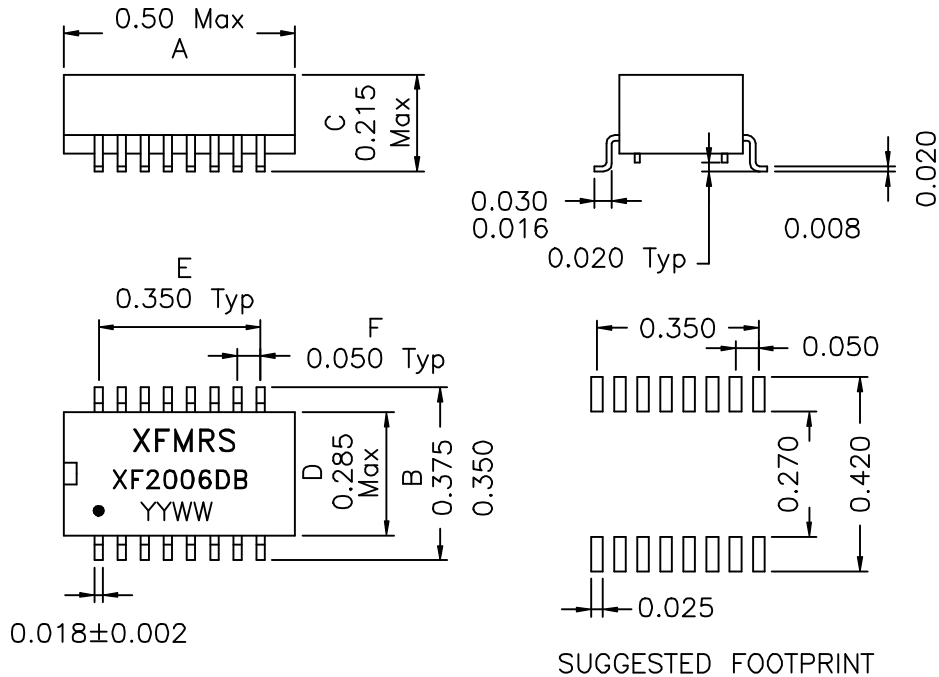

2. Schematic:

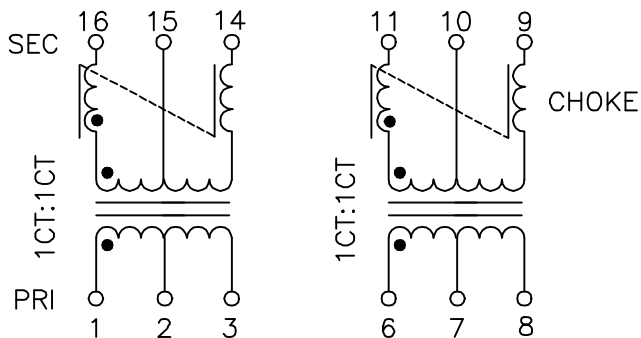

3. Electrical Specifications:@25°C

- Isolation Voltage: 1500 VAC
- Turns Ratio: (1-2-3):(16-15-14)=1CT:1CT ±2%
- Turns Ratio: (6-7-8):(11-10-9)=1CT:1CT ±2%
- PRI OCL: 200uH ±20% @100KHz 50mV
- Cw/w: 15pF Maximum @100KHz 50mV (Pri/Sec)
- Leakage Inductance: 0.25uH Maximum @100KHz 50mV @PRI, WITH SEC SHORTED
- PRI DC Resistance: 0.35 Ohms Maximum
- SEC DC Resistance: 0.80 Ohms Maximum

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV: A/2

XFMRs Inc	Title: 10 BASE T ISOLATION MAGNETICS		
	UNLESS OTHERWISE SPECIFIED	P/N: XF2006DB	REV. A
	TOLERANCES: .xxx ±0.010	DWN. 廖玉坤	Dec-15-00
	Dimensions in Inch	CHK. 李清儿	Dec-15-00
SHEET 1 OF 1	APP. BW	Dec-15-00	