

---

# 2SC4899

Silicon NPN Epitaxial

# HITACHI

---

## Application


VHF / UHF wide band amplifier

## Features

- High gain bandwidth product  
 $f_T = 9 \text{ GHz Typ}$
- High gain, low noise figure  
 $PG = 14.0 \text{ dB Typ, NF} = 1.2 \text{ dB Typ at } f = 900 \text{ MHz}$

## Outline

CMPAK



1. Emitter
2. Base
3. Collector

### Absolute Maximum Ratings (Ta = 25°C)

| Item                         | Symbol    | Ratings     | Unit |
|------------------------------|-----------|-------------|------|
| Collector to base voltage    | $V_{CBO}$ | 15          | V    |
| Collector to emitter voltage | $V_{CEO}$ | 9           | V    |
| Emitter to base voltage      | $V_{EBO}$ | 1.5         | V    |
| Collector current            | $I_C$     | 20          | mA   |
| Collector power dissipation  | $P_C$     | 100         | mW   |
| Junction temperature         | $T_j$     | 150         | °C   |
| Storage temperature          | $T_{stg}$ | -55 to +150 | °C   |


### Electrical Characteristics (Ta = 25°C)

| Item                         | Symbol    | Min  | Typ  | Max  | Unit | Test conditions   |
|------------------------------|-----------|------|------|------|------|---|
| Collector cutoff current:    | $I_{CBO}$ | —    | —    | 10   | μA   | $V_{CB} = 15\text{ V}, I_E = 0$                               |
|                              | $I_{CEO}$ | —    | —    | 1    | mA   | $V_{CE} = 9\text{ V}, R_{BE} = \infty$                        |
| Emitter cutoff current       | $I_{EBO}$ | —    | —    | 10   | μA   | $V_{EB} = 1.5\text{ V}, I_C = 0$                              |
| DC current transfer ratio    | $h_{FE}$  | 50   | 120  | 250  |      | $V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$                     |
| Collector output capacitance | $C_{ob}$  | —    | 0.5  | 0.85 | pF   | $V_{CB} = 5\text{ V}, I_E = 0, f = 1\text{ MHz}$              |
| Gain bandwidth product       | $f_T$     | 6.0  | 9.0  | —    | GHz  | $V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$                     |
| Power gain                   | PG        | 11.0 | 14.0 | —    | dB   | $V_{CE} = 5\text{ V}, I_C = 10\text{ mA}, f = 900\text{ MHz}$ |
| Noise figure                 | NF        | —    | 1.2  | 2.5  | dB   | $V_{CE} = 5\text{ V}, I_C = 5\text{ mA}, f = 900\text{ MHz}$  |


Note: Marking is "YH-".

Attention: This is electrostatic sensitive device.


Maximum Collector Dissipation Curve

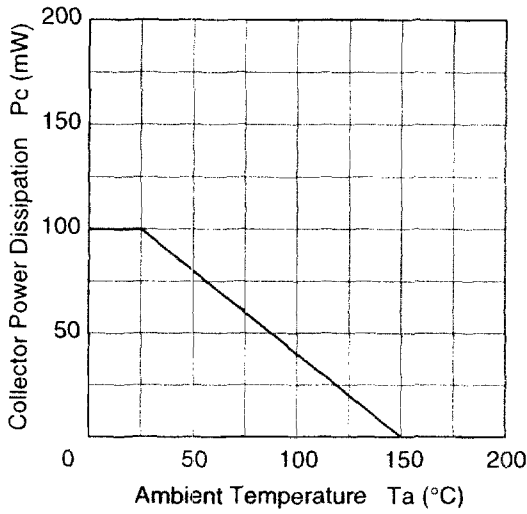


DC Current Transfer Ratio vs. Collector Current

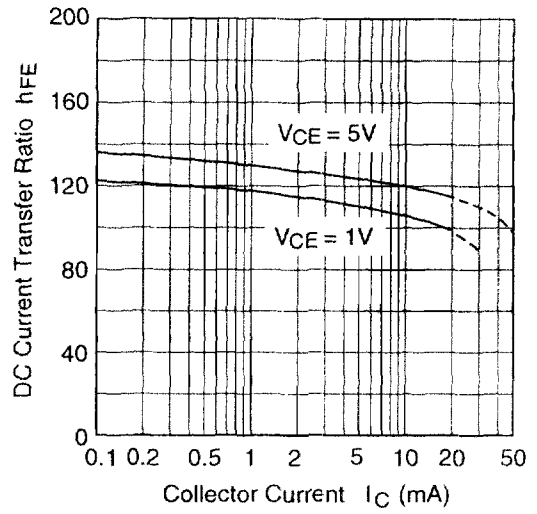


Gain Bandwidth Product vs. Collector Current

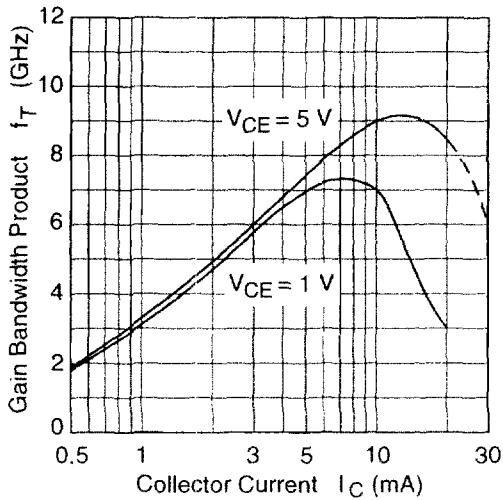


Collector Output Capacitance vs. Collector to Base Voltage

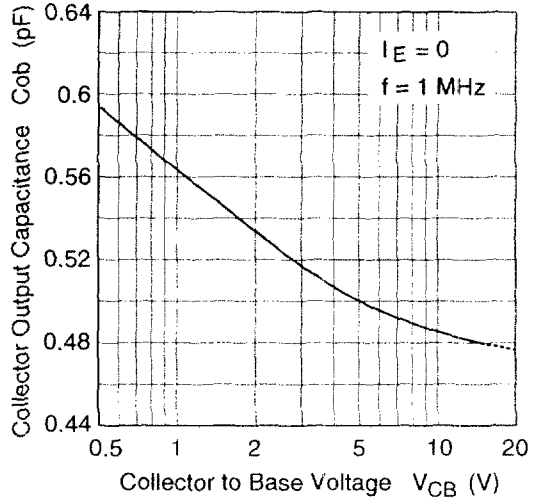


Power Gain vs. Collector Current

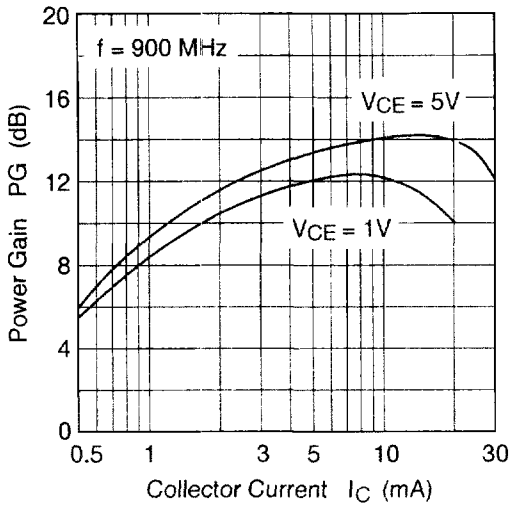


Noise Figure vs. Collector Current

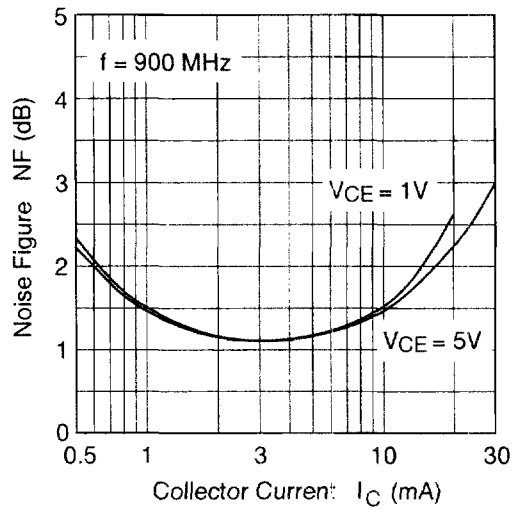

S21 Parameter vs. Collector Current

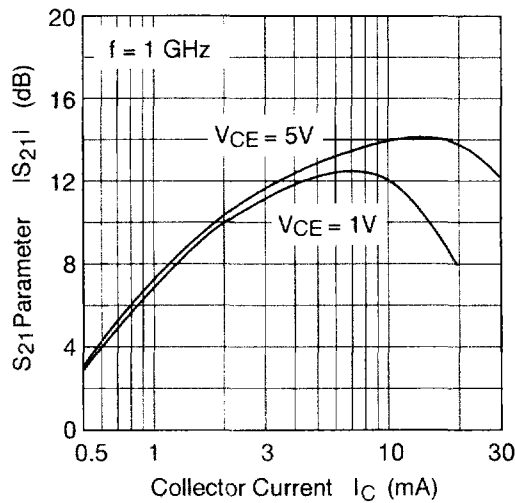


S11 Parameter vs. Frequency

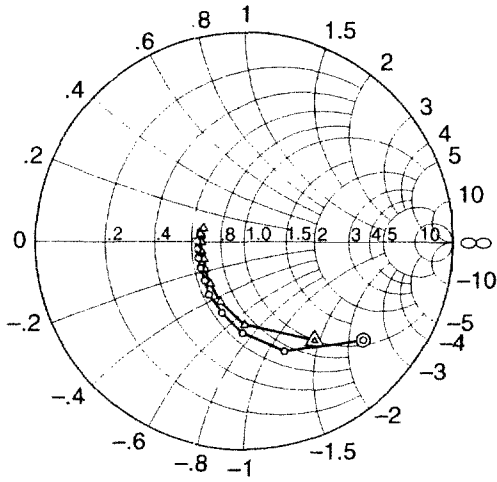


Condition:  $V_{CE} = 5\text{ V}$ ,  $Z_o = 50\ \Omega$   
 200 to 2000 MHz (200 MHz step)  
 ○ — ○ ( $I_C = 5\text{ mA}$ )  
 △ — △ ( $I_C = 10\text{ mA}$ )

S21 Parameter vs. Frequency

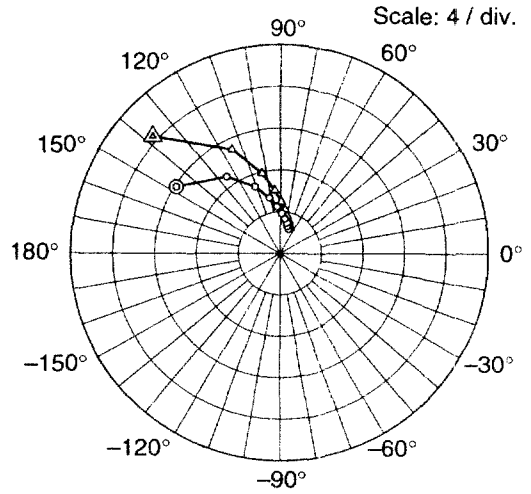


Condition:  $V_{CE} = 5\text{ V}$ ,  $Z_o = 50\ \Omega$   
 200 to 2000 MHz (200 MHz step)  
 ○ — ○ ( $I_C = 5\text{ mA}$ )  
 △ — △ ( $I_C = 10\text{ mA}$ )

S12 Parameter vs. Frequency

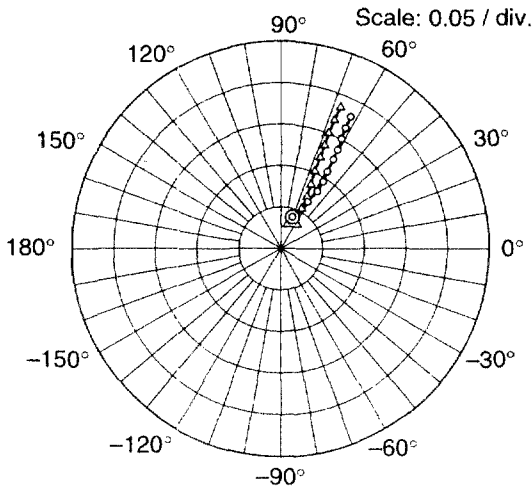


Condition:  $V_{CE} = 5\text{ V}$ ,  $Z_o = 50\ \Omega$   
 200 to 2000 MHz (200 MHz step)  
 ○ — ○ ( $I_C = 5\text{ mA}$ )  
 △ — △ ( $I_C = 10\text{ mA}$ )

S22 Parameter vs. Frequency

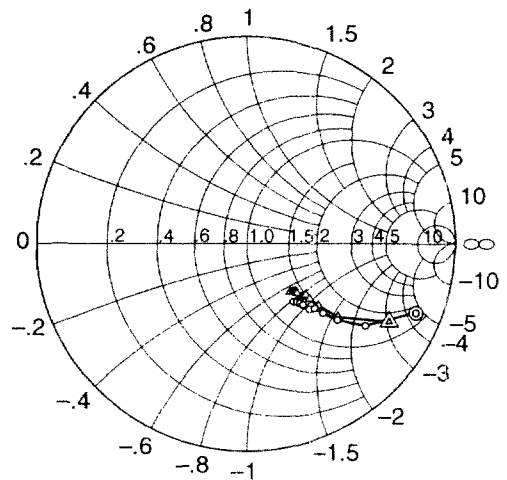

Condition:  $V_{CE} = 5\text{ V}$ ,  $Z_o = 50\ \Omega$   
 200 to 2000 MHz (200 MHz step)  
 ○ — ○ ( $I_C = 5\text{ mA}$ )  
 △ — △ ( $I_C = 10\text{ mA}$ )


S11 Parameter vs. Frequency

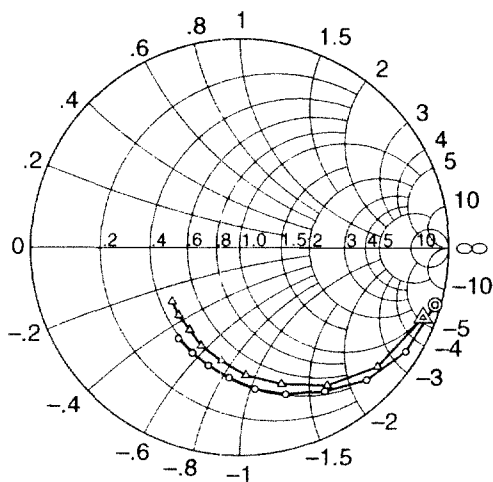

Condition:  $V_{CE} = 1\text{ V}$ ,  $Z_o = 50\ \Omega$   
200 to 2000 MHz (200 MHz step)

○ (I<sub>C</sub> = 0.5 mA)  
△ (I<sub>C</sub> = 1 mA)


S21 Parameter vs. Frequency

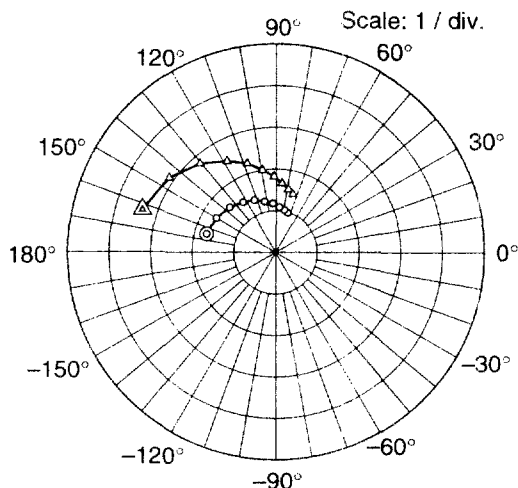

Condition:  $V_{CE} = 1\text{ V}$ ,  $Z_o = 50\ \Omega$   
200 to 2000 MHz (200 MHz step)

○ (I<sub>C</sub> = 0.5 mA)  
△ (I<sub>C</sub> = 1 mA)


S12 Parameter vs. Frequency

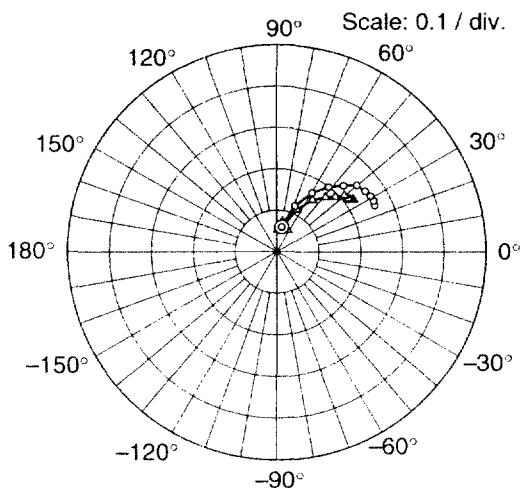

Condition:  $V_{CE} = 1\text{ V}$ ,  $Z_o = 50\ \Omega$   
200 to 2000 MHz (200 MHz step)

○ (I<sub>C</sub> = 0.5 mA)  
△ (I<sub>C</sub> = 1 mA)

S22 Parameter vs. Frequency

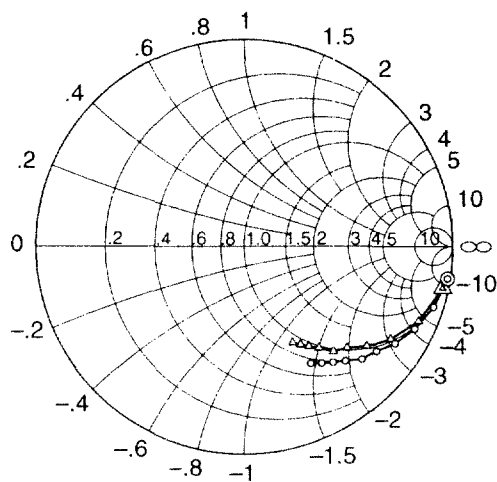

Condition:  $V_{CE} = 1\text{ V}$ ,  $Z_o = 50\ \Omega$   
200 to 2000 MHz (200 MHz step)

○ (I<sub>C</sub> = 0.5 mA)  
△ (I<sub>C</sub> = 1 mA)

## 2SC4899

**S Parameter** ( $V_{CE} = 5 \text{ V}$ ,  $I_C = 5 \text{ mA}$ ,  $Z_o = 50 \Omega$ , Emitter Common)

| Freq.<br>(MHz) | S11   |        | S21   |       | S12    |      | S22   |       |
|----------------|-------|--------|-------|-------|--------|------|-------|-------|
|                | MAG.  | ANG.   | MAG.  | ANG.  | MAG.   | ANG. | MAG.  | ANG.  |
| 100            | 0.814 | -20.5  | 13.23 | 163.0 | 0.0214 | 79.4 | 0.961 | -11.8 |
| 200            | 0.740 | -39.5  | 11.84 | 147.6 | 0.0403 | 70.6 | 0.878 | -22.3 |
| 300            | 0.648 | -56.3  | 10.34 | 134.9 | 0.0550 | 64.1 | 0.780 | -29.7 |
| 400            | 0.563 | -69.7  | 8.99  | 125.2 | 0.0653 | 60.6 | 0.694 | -34.9 |
| 500            | 0.499 | -80.8  | 7.81  | 117.6 | 0.0744 | 58.4 | 0.626 | -38.1 |
| 600            | 0.439 | -90.8  | 6.81  | 111.1 | 0.0821 | 57.9 | 0.571 | -40.3 |
| 700            | 0.393 | -99.1  | 6.11  | 106.0 | 0.0888 | 57.8 | 0.528 | -41.8 |
| 800            | 0.356 | -107.0 | 5.44  | 101.6 | 0.0956 | 58.1 | 0.497 | -42.6 |
| 900            | 0.322 | -115.5 | 4.93  | 97.7  | 0.102  | 58.3 | 0.469 | -43.0 |
| 1000           | 0.303 | -123.2 | 4.51  | 94.6  | 0.109  | 59.2 | 0.452 | -43.7 |
| 1100           | 0.275 | -129.7 | 4.17  | 91.6  | 0.116  | 60.3 | 0.442 | -43.8 |
| 1200           | 0.263 | -135.1 | 3.86  | 88.7  | 0.125  | 59.8 | 0.435 | -46.3 |
| 1300           | 0.253 | -141.7 | 3.61  | 85.9  | 0.130  | 60.2 | 0.414 | -47.3 |
| 1400           | 0.242 | -148.6 | 3.37  | 83.5  | 0.137  | 60.6 | 0.399 | -47.4 |
| 1500           | 0.237 | -154.2 | 3.17  | 81.1  | 0.144  | 61.2 | 0.360 | -47.8 |
| 1600           | 0.232 | -160.0 | 3.00  | 78.7  | 0.151  | 61.5 | 0.383 | -48.1 |
| 1700           | 0.224 | -166.4 | 2.83  | 77.0  | 0.158  | 61.8 | 0.376 | -48.8 |
| 1800           | 0.225 | -171.0 | 2.70  | 74.9  | 0.165  | 62.0 | 0.370 | -49.5 |
| 1900           | 0.228 | -176.5 | 2.59  | 73.0  | 0.172  | 62.2 | 0.363 | -50.2 |
| 2000           | 0.223 | 179.7  | 2.47  | 71.3  | 0.180  | 62.3 | 0.359 | -51.4 |

**S Parameter** ( $V_{CE} = 5 \text{ V}$ ,  $I_C = 10 \text{ mA}$ ,  $Z_0 = 50 \Omega$ , Emitter Common)

| Freq.<br>(MHz) | S11   |        | S21   |       | S12    |      | S22   |       |
|----------------|-------|--------|-------|-------|--------|------|-------|-------|
|                | MAG.  | ANG.   | MAG.  | ANG.  | MAG.   | ANG. | MAG.  | ANG.  |
| 100            | 0.688 | -29.6  | 20.06 | 156.3 | 0.0201 | 76.3 | 0.921 | -16.8 |
| 200            | 0.582 | -54.7  | 16.54 | 137.5 | 0.0349 | 67.8 | 0.780 | -28.9 |
| 300            | 0.479 | -74.0  | 13.31 | 124.0 | 0.0459 | 64.0 | 0.653 | -35.6 |
| 400            | 0.399 | -89.5  | 10.97 | 114.9 | 0.0544 | 63.0 | 0.564 | -39.0 |
| 500            | 0.345 | -101.3 | 9.20  | 108.4 | 0.0624 | 62.6 | 0.501 | -40.4 |
| 600            | 0.309 | -111.2 | 7.87  | 103.1 | 0.0702 | 63.7 | 0.456 | -41.0 |
| 700            | 0.280 | -120.4 | 6.90  | 98.7  | 0.0782 | 64.3 | 0.424 | -41.1 |
| 800            | 0.257 | -128.5 | 6.09  | 95.2  | 0.0857 | 65.2 | 0.402 | -41.2 |
| 900            | 0.243 | -137.6 | 5.45  | 92.0  | 0.0936 | 66.0 | 0.384 | -41.0 |
| 1000           | 0.227 | -145.3 | 4.97  | 89.3  | 0.102  | 66.6 | 0.375 | -40.8 |
| 1100           | 0.216 | -153.0 | 4.56  | 86.8  | 0.111  | 67.3 | 0.373 | -40.8 |
| 1200           | 0.207 | -156.5 | 4.22  | 84.2  | 0.120  | 66.9 | 0.369 | -43.5 |
| 1300           | 0.206 | -163.1 | 3.93  | 82.2  | 0.126  | 67.1 | 0.350 | -44.4 |
| 1400           | 0.209 | -168.6 | 3.65  | 80.0  | 0.135  | 67.6 | 0.339 | -44.5 |
| 1500           | 0.204 | -176.8 | 3.43  | 77.9  | 0.143  | 67.5 | 0.334 | -44.4 |
| 1600           | 0.203 | 180.0  | 3.24  | 75.9  | 0.151  | 67.7 | 0.330 | -44.6 |
| 1700           | 0.207 | 173.7  | 3.06  | 74.2  | 0.160  | 67.6 | 0.325 | -45.5 |
| 1800           | 0.211 | 169.8  | 2.91  | 72.5  | 0.168  | 67.5 | 0.322 | -46.1 |
| 1900           | 0.215 | 164.6  | 2.78  | 71.1  | 0.177  | 67.4 | 0.317 | -47.2 |
| 2000           | 0.204 | 161.2  | 2.66  | 69.2  | 0.185  | 67.2 | 0.314 | -48.2 |



## 2SC4899

S Parameter ( $V_{CE} = 1\text{ V}$ ,  $I_C = 0.5\text{ mA}$ ,  $Z_0 = 50\ \Omega$ , Emitter Common)

| Freq.<br>(MHz) | S11   |        | S21   |       | S12    |      | S22   |       |
|----------------|-------|--------|-------|-------|--------|------|-------|-------|
|                | MAG.  | ANG.   | MAG.  | ANG.  | MAG.   | ANG. | MAG.  | ANG.  |
| 100            | 0.983 | -7.8   | 1.76  | 172.6 | 0.0295 | 85.3 | 0.996 | -4.5  |
| 200            | 0.974 | -16.2  | 1.71  | 165.0 | 0.0604 | 79.3 | 0.987 | -9.1  |
| 300            | 0.958 | -24.3  | 1.69  | 157.1 | 0.0910 | 73.8 | 0.972 | -13.7 |
| 400            | 0.936 | -32.1  | 1.65  | 149.9 | 0.118  | 68.9 | 0.954 | -17.9 |
| 500            | 0.904 | -39.4  | 1.59  | 142.8 | 0.143  | 64.1 | 0.933 | -22.0 |
| 600            | 0.877 | -46.3  | 1.55  | 135.7 | 0.165  | 59.6 | 0.909 | -26.0 |
| 700            | 0.845 | -53.1  | 1.48  | 129.3 | 0.184  | 55.5 | 0.886 | -29.3 |
| 800            | 0.799 | -59.4  | 1.44  | 123.2 | 0.199  | 51.9 | 0.861 | -32.9 |
| 900            | 0.781 | -66.6  | 1.39  | 117.4 | 0.214  | 48.3 | 0.835 | -35.9 |
| 1000           | 0.738 | -72.6  | 1.36  | 112.3 | 0.225  | 45.3 | 0.810 | -38.5 |
| 1100           | 0.714 | -78.0  | 1.32  | 107.2 | 0.235  | 43.5 | 0.791 | -40.9 |
| 1200           | 0.683 | -83.8  | 1.25  | 102.6 | 0.249  | 40.2 | 0.783 | -44.0 |
| 1300           | 0.657 | -89.0  | 1.21  | 98.3  | 0.253  | 37.0 | 0.758 | -46.7 |
| 1400           | 0.626 | -94.6  | 1.18  | 93.8  | 0.256  | 34.8 | 0.734 | -48.7 |
| 1500           | 0.603 | -99.6  | 1.14  | 89.8  | 0.259  | 32.9 | 0.717 | -50.9 |
| 1600           | 0.585 | -104.8 | 1.09  | 85.9  | 0.260  | 31.1 | 0.702 | -52.7 |
| 1700           | 0.567 | -109.5 | 1.06  | 82.5  | 0.261  | 29.6 | 0.687 | -54.7 |
| 1800           | 0.553 | -114.2 | 1.04  | 79.1  | 0.261  | 28.0 | 0.674 | -56.6 |
| 1900           | 0.538 | -119.8 | 1.02  | 76.5  | 0.260  | 27.1 | 0.659 | -58.7 |
| 2000           | 0.524 | -123.9 | 0.994 | 73.7  | 0.258  | 25.6 | 0.647 | -60.5 |

**S Parameter** ( $V_{CE} = 1 \text{ V}$ ,  $I_C = 1 \text{ mA}$ ,  $Z_O = 50 \Omega$ , Emitter Common)

| Freq.<br>(MHz) | S11   |        | S21  |       | S12    |      | S22   |       |
|----------------|-------|--------|------|-------|--------|------|-------|-------|
|                | MAG.  | ANG.   | MAG. | ANG.  | MAG.   | ANG. | MAG.  | ANG.  |
| 100            | 0.956 | -10.5  | 3.49 | 171.1 | 0.0298 | 83.7 | 0.991 | -6.1  |
| 200            | 0.938 | -20.8  | 3.37 | 162.3 | 0.0596 | 77.0 | 0.972 | -12.0 |
| 300            | 0.912 | -31.1  | 3.26 | 153.2 | 0.0874 | 70.7 | 0.945 | -18.1 |
| 400            | 0.871 | -40.9  | 3.12 | 145.1 | 0.112  | 65.1 | 0.910 | -23.4 |
| 500            | 0.830 | -50.1  | 2.94 | 137.9 | 0.133  | 60.0 | 0.871 | -28.1 |
| 600            | 0.782 | -57.6  | 2.80 | 130.6 | 0.151  | 56.0 | 0.831 | -32.5 |
| 700            | 0.740 | -65.8  | 2.63 | 124.0 | 0.164  | 51.9 | 0.795 | -36.1 |
| 800            | 0.686 | -73.0  | 2.48 | 118.2 | 0.175  | 48.8 | 0.759 | -39.4 |
| 900            | 0.656 | -80.7  | 2.35 | 112.5 | 0.185  | 45.9 | 0.725 | -42.4 |
| 1000           | 0.613 | -87.2  | 2.24 | 107.9 | 0.192  | 43.8 | 0.694 | -44.8 |
| 1100           | 0.582 | -93.3  | 2.13 | 103.8 | 0.200  | 42.8 | 0.672 | -47.0 |
| 1200           | 0.551 | -99.1  | 2.00 | 99.3  | 0.210  | 40.3 | 0.662 | -49.8 |
| 1300           | 0.532 | -104.7 | 1.91 | 95.3  | 0.210  | 38.1 | 0.631 | -52.4 |
| 1400           | 0.505 | -111.4 | 1.82 | 91.6  | 0.213  | 37.2 | 0.606 | -53.8 |
| 1500           | 0.483 | -116.3 | 1.74 | 88.1  | 0.215  | 36.3 | 0.587 | -55.6 |
| 1600           | 0.461 | -121.2 | 1.66 | 84.9  | 0.216  | 35.6 | 0.573 | -57.3 |
| 1700           | 0.445 | -127.2 | 1.59 | 81.9  | 0.217  | 34.9 | 0.558 | -58.6 |
| 1800           | 0.435 | -132.0 | 1.54 | 78.9  | 0.219  | 35.0 | 0.545 | -60.3 |
| 1900           | 0.425 | -137.6 | 1.49 | 76.7  | 0.221  | 34.7 | 0.531 | -61.8 |
| 2000           | 0.413 | -141.4 | 1.45 | 73.9  | 0.221  | 34.6 | 0.519 | -63.5 |