


R.F.I. Suppressors - WYE Specifications

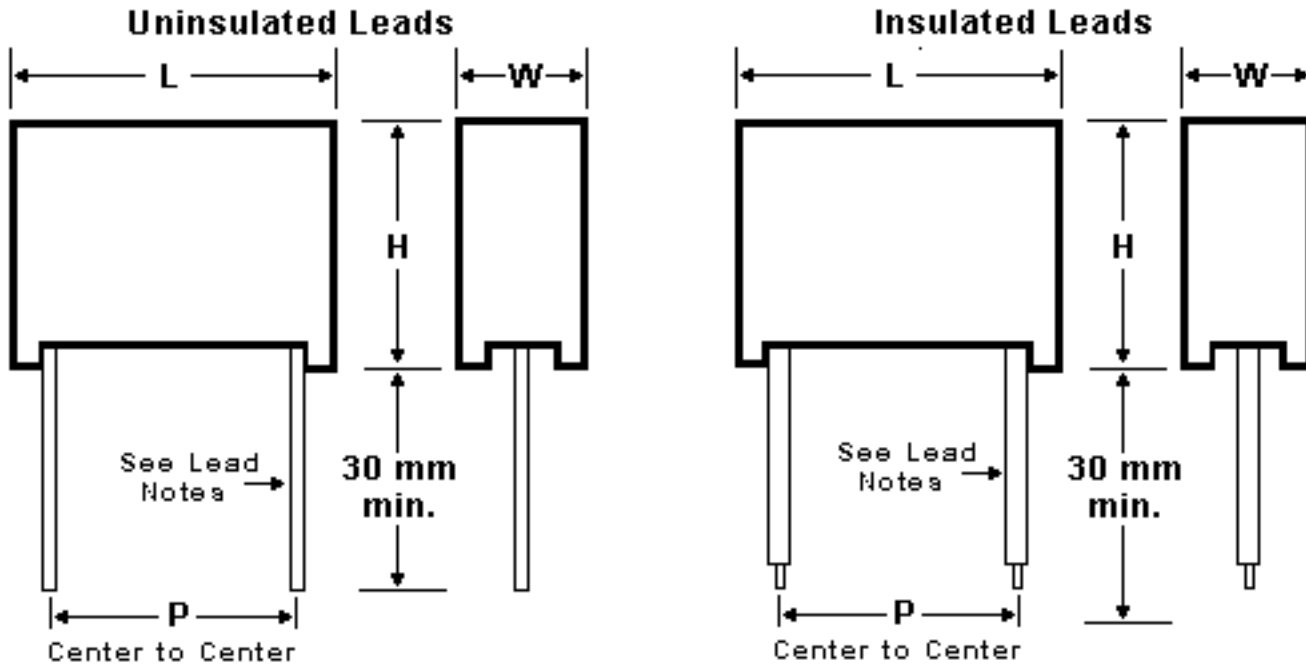

Available with uninsulated or insulated leads

Lead Notes:

1. (AB) = 2 digits leads length code in mm.
2. All insulated leads have 0.7mm striped and tinned ends.

Standard Lead Lengths		
Lead cuts L04, L05, L06 Suffixes 4mm, 5mm, 6mm ± 1mm	6mm ± 1mm short leads	Solid uninsulated wire $\varnothing = 0.8$ mm
Standard	35mm ± 5mm long leads	Solid uninsulated wire $\varnothing = 0.8$ mm
Suffix - 02	35mm ± 5mm solid cu wire	0.8 mm diameter, PCV insulated
Suffix - 03	35mm ± 5mm stranded cu wire	0.5 mm ² PCV insulated
Non-standard Lead Lengths		
Suffix - 02*(AB)	Solid cu wire	0.8 mm diameter, PCV insulated
Suffix - 03*(AB)	Stranded cu wire	0.5 mm ² PCV insulated

R.F.I. Suppressors - WYE Specifications - CONTINUED

WYE Specifications							
Part Number	Cap. (μF)	L max mm	H max mm	W max mm	P ±0.5 mm	Quantity Per Box	
						Long Lead 30-35mm	Short Lead 4, 5, 6mm
WYE-102M	0.0010	13.0	10.5	4.5	10.0	1000	2200
WYE-152M	0.0015	13.0	10.5	4.5	10.0	1000	2200
WYE-222M	0.0022	13.0	10.5	5.5	10.0	1000	1800
WYE-252M	0.0025	13.0	10.5	5.5	10.0	1000	1800
WYE-332M	0.0033	13.0	12.5	5.5	10.0	800	1500
WYE-392M	0.0039	13.0	12.5	5.5	10.0	800	1500
WYE-472M	0.0047	13.0	13.5	5.5	10.0	800	1400
WYE-682M	0.0068	18.0	14.0	5.5	15.0	500	1000
WYE-103M	0.0100	18.0	13.5	7.5	15.0	400	750
WYE-153M	0.0150	18.0	14.5	8.5	15.0	400	650
WYE-223M	0.0220	18.0	17.0	8.5	15.0	300	550

dv/dt up to 0.0047μF = 1000v/μs
 dv/dt 0.0068μF to 0.022μF = 600v/μs