



MCZ SERIES

105°C Ultra Low ESR.

◆ FEATURES

- Ultra Low ESR for VRM.
- Enabled high ripple current by a reduction of ESR at high frequency range.
- RoHS compliance.



◆ SPECIFICATIONS

Items	Characteristics															
Category Temperature Range	−40～+105°C															
Rated Voltage Range	6.3～16V.DC															
Capacitance Tolerance	±20% (20°C, 120Hz)															
Leakage Current(MAX)	I=0.03CV (After 2 minutes application of rated voltage) I=Leakage Current(μ A) C=Rated Capacitance(μ F) V=Rated Voltage(V)															
Dissipation Factor(MAX) (tan δ)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> </tr> <tr> <td>tan δ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> </tr> </table> <p>(20°C, 120Hz)</p> <p>When rated capacitance is over 1000 μ F, tan δ shall be added 0.02 to the listed value with increase of every 1000 μ F.</p>				Rated Voltage (V)	6.3	10	16	tan δ	0.22	0.19	0.16				
Rated Voltage (V)	6.3	10	16													
tan δ	0.22	0.19	0.16													
Endurance	<p>After applying rated voltage with rated ripple current for 2000hrs at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td colspan="3">Within ±25% of the initial value.</td></tr> <tr> <td>Dissipation Factor</td> <td colspan="3">Not more than 200% of the specified value.</td></tr> <tr> <td>Leakage Current</td> <td colspan="3">Not more than the specified value.</td></tr> </table>				Capacitance Change	Within ±25% of the initial value.			Dissipation Factor	Not more than 200% of the specified value.			Leakage Current	Not more than the specified value.		
Capacitance Change	Within ±25% of the initial value.															
Dissipation Factor	Not more than 200% of the specified value.															
Leakage Current	Not more than the specified value.															
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> </tr> <tr> <td>Z(−25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(−40°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> <p>(120Hz)</p>				Rated Voltage (V)	6.3	10	16	Z(−25°C)/Z(20°C)	2	2	2	Z(−40°C)/Z(20°C)	3	3	3
Rated Voltage (V)	6.3	10	16													
Z(−25°C)/Z(20°C)	2	2	2													
Z(−40°C)/Z(20°C)	3	3	3													

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient


Frequency (Hz)	120	1k	10k	100k≤
Coefficient	0.50	0.80	0.90	1.00

◆ PART NUMBER

□□□ MCZ □□□□□ □ □□□ □□ DXL
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆DIMENSIONS

(mm)

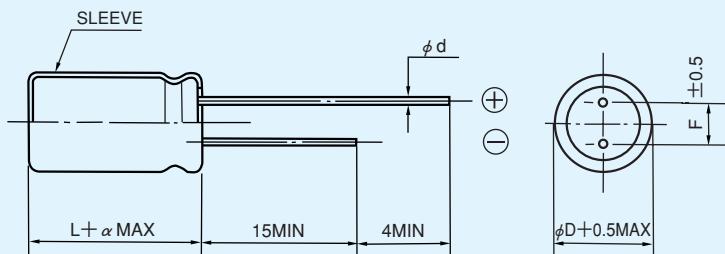

ϕD	8	10
ϕd	0.6	
F	3.5	5.0
α	$L \leq 16 : \alpha = 1.5$ $L \geq 20 : \alpha = 2.0$	

◆STANDARD SIZE

Rated voltage 6.3V(0J)			
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	ESR (mΩ MAX/20°C, 100kHz)
820	8X11.5	1340	21
1200	8X16	1850	18
1800	8X20	2350	12
1500	10X12.5	1960	16
1800	10X16	2460	12.5
2200	10X20	2770	11
3300	10X25	3230	9

Rated voltage 10V(1A)			
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	ESR (mΩ MAX/20°C, 100kHz)
680	8X11.5	1340	21
1000	8X16	1850	18
1500	8X20	2350	12
1000	10X12.5	1960	16
1500	10X16	2460	12.5
1800	10X20	2770	11
2200	10X25	3230	9

Rated voltage 16V(1C)			
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	ESR (mΩ MAX/20°C, 100kHz)
470	8X11.5	1340	21
680	8X16	1850	18
1000	8X20	2350	12
680	10X12.5	1960	16
1000	10X16	2460	12.5
1500	10X20	2770	11
1800	10X25	3230	9