


## KF42X Series Dual Port D-Sub with Ferrite

Pictured with Board Lock Option, Dimensions in mm [In]

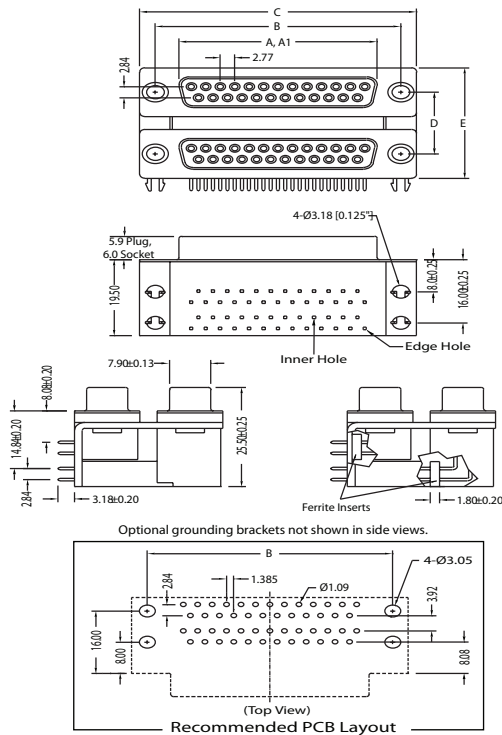

Number of Contacts (Shell Size)	Dimensions (Inch/mm)			
	A	A1	B	C
9 (E)	.643 16.33	.666 16.92	.984 24.99	1.213 30.81
15 (A)	.971 24.66	.994 25.25	1.312 33.32	1.541 39.14
25 (B)	1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04

Center to Center Spacing	D	E
A	.750 19.05	1.244 31.60
B	.900 22.86	1.394 35.41
C	.625 15.88	1.119 28.42

A1 = Interior of Male Shell (P) A = Exterior of Female Shell (S)

## FERRITE D-SUBMINIATURE

### KF42X Series

#### Documentation & Ordering Information


Kycon Part #

#### Part Builder

Series	Top Shell Size Connector Type	Bottom Shell Size Connector	Center Distance	Board Lock	Jack Screws	Plating Option
--------	-------------------------------	-----------------------------	-----------------	------------	-------------	----------------

#### Series

KF42X - Dual-Port D-Subminiature Connector

#### Top Shell Size

- E - 9 Contacts
- A - 26 Contacts
- B - 25 Contacts
- C - 62 Contacts
- E - 15 Contacts (High Density)

#### Top Connector Type

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

#### Bottom Shell Size

- E - 9 Contacts
- A - 15 Contacts
- B - 44 Contacts
- C - 62 Contacts
- E - 15 Contacts (High Density)

#### Bottom Connector Type

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

#### Center to Center Distance

- A - .750"
- B - .900"
- C - .625"

#### Board Locks Option

- Blank - No Board Lock
- 2N - Board Locks in rear only
- 4N - Board Locks in ( Most Popular)

#### Jack Screws Option

- Blank - No Jack Screws
- J - 4-40 HEX Removable Jack Screws
- R - Round Riveted Jack Screws

#### Plating Option

- Blank - Gold Flash
- 15 - 15µ" Gold
- 30 - 30µ" Gold