

RoHS Compliant

Features

- Crystal unit for Consumer Products
- Small and low profile 0.9mm max. (3.2×2.5×0.8mm)
- Ceramic package
- Product with lead free terminations
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products

How to Order

CX3225GB 27000

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series ② Frequency
③ Load Capacitance ④ Frequency Stability

B0	6 pF	—	P	±50×10 ⁻⁶	Std.
D0	8 pF	Std.			
F0	10 pF	—			

- ⑤ Operating Temp. Range ⑥ Frequency Temp. Stability

ES	-10 to +70°C	±50×10 ⁻⁶	Std.
-----------	--------------	----------------------	------

- ⑦ Individual Specification... Std.Spec. as "ZZ"

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	10000 to 54000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	
Frequency Stability	f _{tol}	±50	×10 ⁻⁶	@ 25°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-10 to +70	°C	
Storage Temp. Range	T _{stg}	-40 to +85	°C	
Frequency Temp. Characteristics	f _{tem}	±50	×10 ⁻⁶	ref. @ 25°C over operating temperature range

* Please contact us for other specifications.

Typical Frequencies and Part Numbers

Frequency (kHz)	Standard Part Number
10000.000	CX3225GB10000D0PESZZ
12000.000	CX3225GB12000D0PESZZ
13560.000	CX3225GB13560D0PESZZ
14318.180	CX3225GB14318D0PESZZ
14745.600	CX3225GB14745D0PESZZ
16000.000	CX3225GB16000D0PESZZ
18432.000	CX3225GB18432D0PESZZ
19200.000	CX3225GB19200D0PESZZ
20000.000	CX3225GB20000D0PESZZ
22579.200	CX3225GB22579D0PESZZ
24000.000	CX3225GB24000D0PESZZ
24576.000	CX3225GB24576D0PESZZ
25000.000	CX3225GB25000D0PESZZ
27000.000	CX3225GB27000D0PESZZ
27120.000	CX3225GB27120D0PESZZ
30000.000	CX3225GB30000D0PESZZ
32000.000	CX3225GB32000D0PESZZ
33333.000	CX3225GB33333D0PESZZ
38400.000	CX3225GB38400D0PESZZ
40000.000	CX3225GB40000D0PESZZ
48000.000	CX3225GB48000D0PESZZ
54000.000	CX3225GB54000D0PESZZ


Table1 Motional Series Resistance Table2 Level of Drive

Frequency Range	Motional Series Resistance	Units
10000 to 11999kHz	500 max.	ohm
12000 to 13999kHz	300 max.	
14000 to 15999kHz	200 max.	
16000 to 26999kHz	100 max.	
27000 to 54000kHz	50 max.	

Frequency Range	Drive Level	Units
10000 to 54000kHz	10 (100 max.)	μW

Dimensions

(Unit: mm)

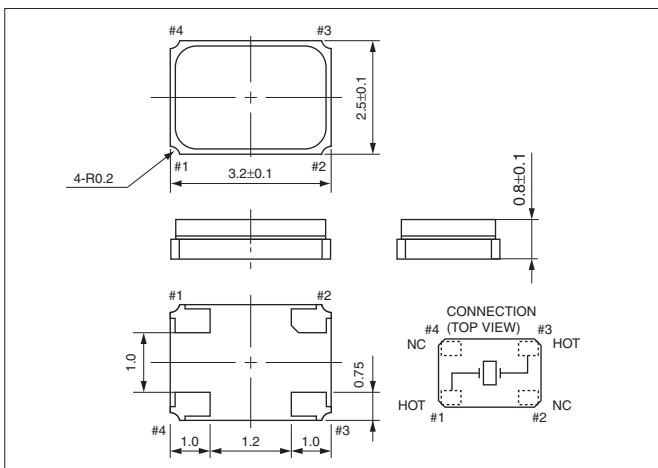

Recommended Land Pattern

(Unit: mm)

