


Metal Film, Cylindrical Resistors

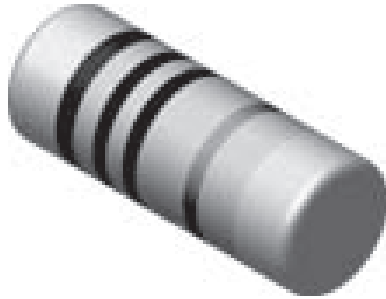

FEATURES

- Metal film resistor with high power rating
- Stable metal film on high quality ceramic
- Good thermal distribution
- Force fitted steel caps, tin plated on nickel barrier
- Reliable solderable terminations to facilitate surface mounting.

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	POWER RATING $P_{70^{\circ}\text{C}}^{1)}$ W	LIMITING ELEMENT VOLTAGE MAX. ²⁾ V_{\cong}	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
SMM0207	1.0	350	50	0.5	1R0 – 2M21	24 – 96
SMM0207	1.0	350	50	1	1R0 – 10M	24 – 96
SMM0207	1.0	350	100	5	R16 – R91	24

Zero-Ohm-Resistor : OMM0207 $R_{\text{max}} = 10\text{m}\Omega$ $I_{\text{max}} = 5\text{A}$

¹⁾ Power rating depends on the maximum temperature at the solder point, the component placement density and the substrate material.

²⁾ Rated voltage: $\sqrt{P \times R}$

- Further values and tolerances on request
- Coating: light green
- Marking: see appropriate catalog or web page
- Zero ohm resistor has one black band only


TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	SMM0207
Rated Dissipation at 70 °C	W	1
Limiting Element Voltage ²⁾	V_{\cong}	350
Insulation Voltage (1 min)	$V_{\text{dc/ac peak}}$	> 500
Thermal Resistance	K/W	see table
Insulation Resistance	Ω	$\geq 10^{11}$
Category Temperature Range	°C	- 55 / + 125 (+ 155)
Failure Rate	10^{-9} /h	< 5
Weight / 1000pcs	g	77

ORDERING INFORMATION


SMM0207	50	562R	1%	BP
MODEL	TC ppm / K	RESISTANCE VALUE Ω	TOLERANCE \pm %	PACKAGING BP-Blistertape 1500 pcs

DIMENSIONS

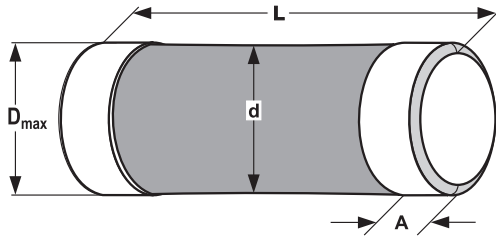

MODEL	DIMENSIONS [in millimeters]				
	D _{max}	d *	L	A _{max}	A _{min}
SMM0207	2.2	D -0.2	5.8 - 0.3	1.2	0.6

* d measured in the middle of the resistor






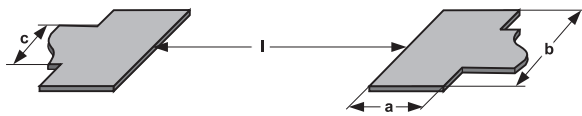




SOLDER PAD DIMENSIONS [in millimeters]					
a x b (mm)	LINE-WIDTH C (mm)	P ₇₀ for 35μ (W)	R _{th} for 35μ (K/W)	P ₇₀ for 70μ (W)	R _{th} for 70μ (K/W)
6 x 6	6	0.82	103	0.99	86
3 x 3	3	0.70	121	0.82	104
2 x 3	2	0.62	137	0.71	120
3 x 3	2	0.65	131	0.75	114
1 x 3	1	0.51	166	0.58	147
3 x 3	1	0,57	148	0.63	134
2.4 x 2	0.5	0.46	184	0.50	171
2.4 x 2	0.5	0.48	177	0.52	163

• Line length 30mm min, l = 2.8mm

PACKAGING						
MODEL	REEL				BULK	
	TAPE WIDTH	DIAMETER	PIECES / REEL	CODE	LOOSE IN PLASTIC CONTAINER PIECES / MAGAZINE	
					PIECES	CODE
SMM0207	12mm	180mm	1500	BP	1000	L1
OMM0207	Blisertape	330mm	7500	BS		

• Further information about packaging see appropriate catalog or web page.

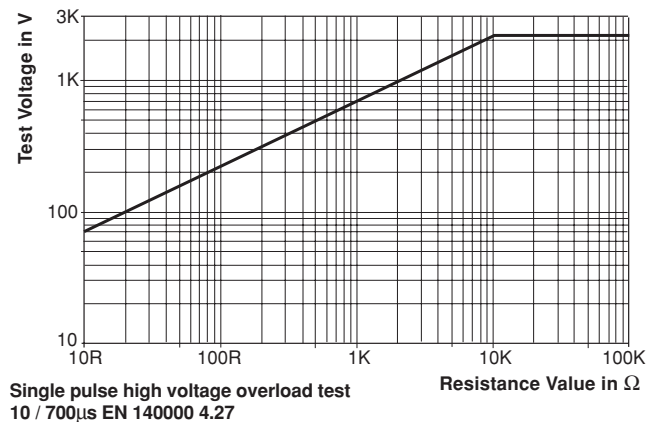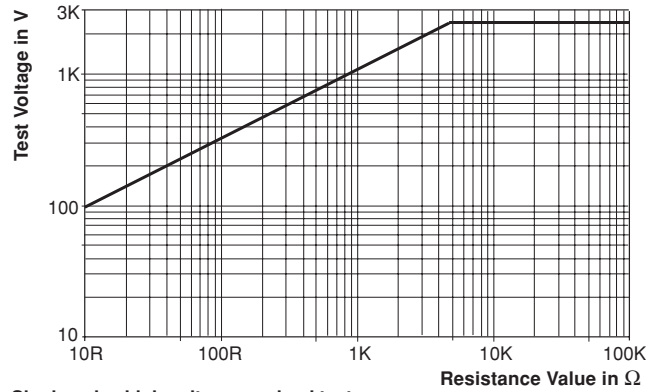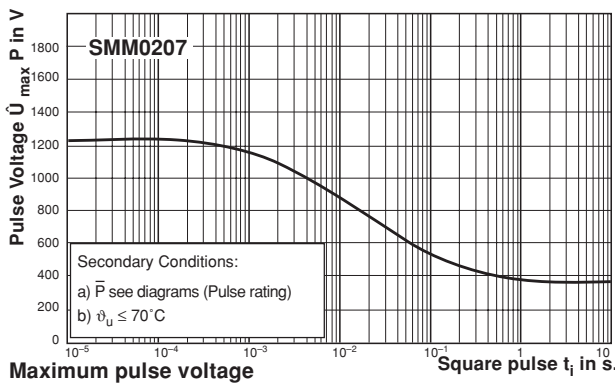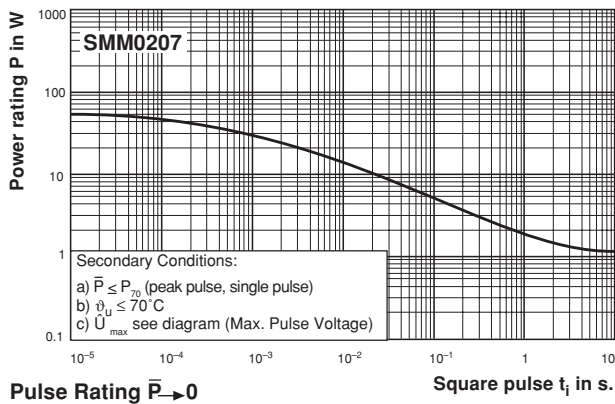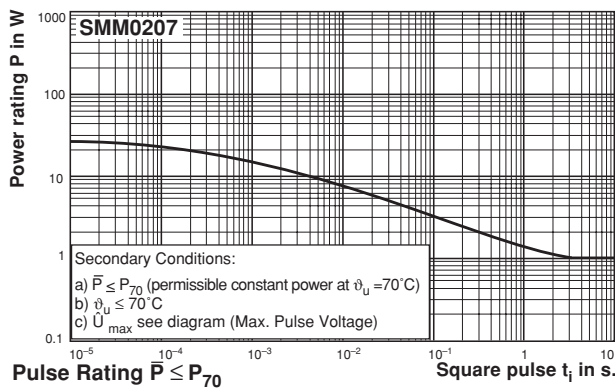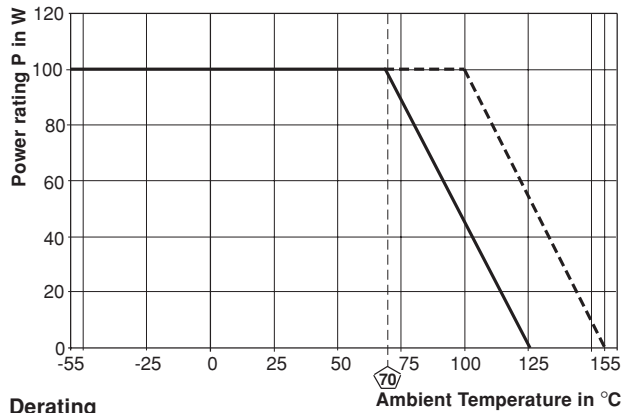

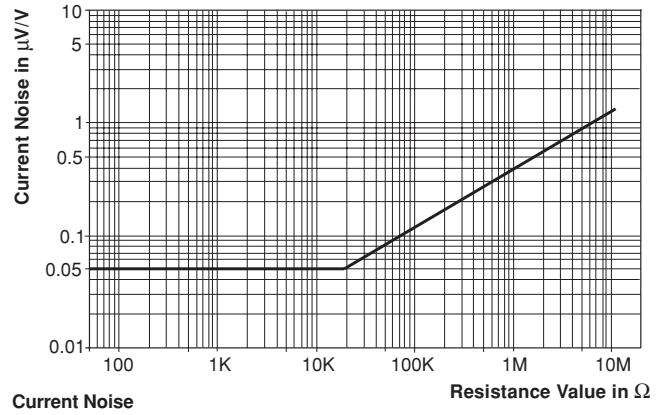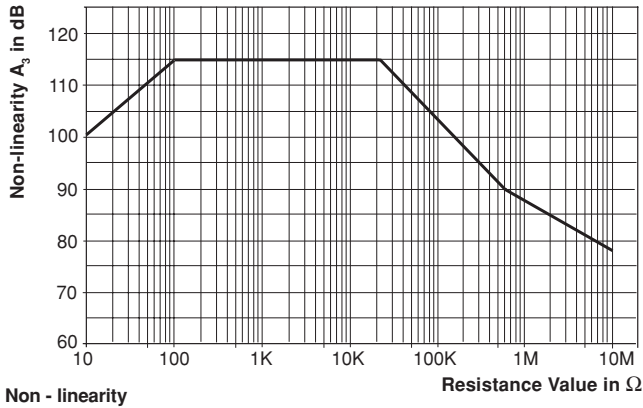

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST RESULTS ¹⁾
Endurance Test at 70°C IEC 60115-1 4.25.1	1000 hours at 70°C 1.5 hours "ON" 0.5 hours "OFF"	≤ ± 0.5 %
Endurance at UCT IEC 60115-1 4.25.3	1000 hours at 125 °C without load	≤ ± 0.5 %
Overload Test IEC 60115-1 4.13	Short time overload for 2 seconds 2.5 x rated voltage or ≤ 2 x limiting element voltage	≤ ± 0.5 %
Thermal Shock IEC 60115-1 4.19 IEC 60068-2-14	Rapid change between upper and lower category temperature	≤ ± 0.1 %
Damp Heat Steady State IEC 60115-1 4.24 IEC 60068-2-3	56 days at 40°C and 93% relative humidity	≤ ± 0.5 %
Resistance to Soldering Heat IEC 60115-1 4.18 IEC 60068-2-20	10 seconds at 260°C solder bath temperature	≤ ± 0.25 %

¹⁾ for a resistance range from 10Ω to 1MΩ

APPLICABLE SPECIFICATIONS
<ul style="list-style-type: none"> • CECC40000 / 40400 / 40401-803 • EN140400 / IEC 60115 – 1



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.