
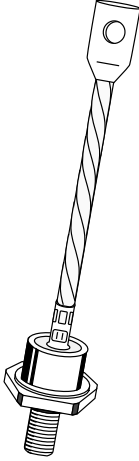
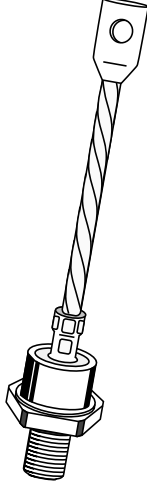


Rectifiers, General Purpose

(Continued)

I_O (AMPS)	60	80	150	250
@ T_C (°C)	150	150	150	150
I_{FSM} (AMPS)	900	1500	3000	5000
CASE	 DO-5*		 DO-8*	 DO-9*
V_{RRM} (VOLTS)				
100	CR60-010	CR80-010	CR150-010	CR250-010
200	CR60-020	CR80-020	CR150-020	CR250-020
400	CR60-040	CR80-040	CR150-040	CR250-040
600	CR60-060	CR80-060	CR150-060	CR250-060
800	CR60-080	CR80-080	CR150-080	CR250-080
1000	CR60-100	CR80-100	CR150-100	CR250-100
1200	CR60-120	CR80-120	CR150-120	CR250-120

V_F MAX @ $I_F = I_O$	1.1V	1.2V	1.1V	1.1V
-------------------------	------	------	------	------

I_R MAX @ V_{RRM}	100 μ A	100 μ A	1.0mA	2.0mA
-----------------------	-------------	-------------	-------	-------

* Standard polarity is cathode to case. For reverse polarity add "R" suffix to part number.

(6-December 2004)

Central[™]
Semiconductor Corp.
www.centalsemi.com