
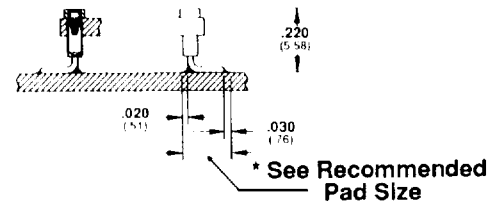
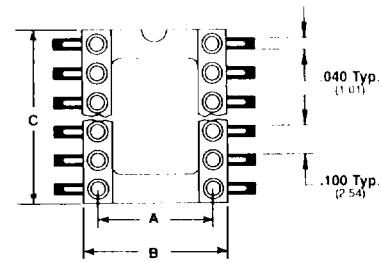


Surface Mount DIP Sockets





Features:

- Sockets surface mounted to PCB.
- Available in high temperature thermoplastic.
- Multiple finger contacts for reliability.
- Tapered entry for ease of insertion.
- Closed end construction for ease of insertion.

Body Material:

HLS - High Temp. Glass Filled Thermoplastic, U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)

Terminal Information:



* Recommended Pad Size
.145" (3.65mm)

* Recommended Pad Size
.165" (4.19mm)

Dimensional Information

# of Pins	A	B	C
8	.300 (7.62)	.400 (10.16)	.400 (10.16)
14	.300 (7.62)	.400 (10.16)	.700 (17.78)
16	.300 (7.62)	.400 (10.16)	.800 (20.32)
18	.300 (7.62)	.400 (10.16)	.900 (22.86)
20	.300 (7.62)	.400 (10.16)	1.000 (25.40)
22	.300 (7.62)	.400 (10.16)	1.100 (27.94)
24	.300 (7.62)	.400 (10.16)	1.200 (30.48)
28	.300 (7.62)	.400 (10.16)	1.400 (35.56)
22	.400 (10.16)	.500 (12.70)	1.100 (27.94)
24	.400 (10.16)	.500 (12.70)	1.200 (30.48)
24	.600 (15.24)	.700 (17.78)	1.200 (30.48)
28	.600 (15.24)	.700 (17.78)	1.400 (35.56)
32	.600 (15.24)	.700 (17.78)	1.600 (40.64)
40	.600 (15.24)	.700 (17.78)	2.000 (50.80)
48	.600 (15.24)	.700 (17.78)	2.400 (60.96)
64	.900 (22.86)	1.000 (25.40)	3.200 (81.28)

How To Order

