


PARAMETER		UNITS
Impedance Primary /Secondary	600/600	$\Omega$
Primary DC Resistance	65	$\Omega$
Secondary DC Resistance	85	$\Omega$
Maximum Power	+ 7	dBm
DC Current	0	mA
Frequency Response 300 - 3500Hz	$\pm 2.5$	dB
Insertion Loss @ 1kHz	2.5	dB
Total Harmonic Distortion (max)	76 (.016%)	dB
Longitudinal Balance (min)	60	dB
Isolation (min)	1500	V <sub>rms</sub>


## Audio Matching Transformer

### Schematic Diagram

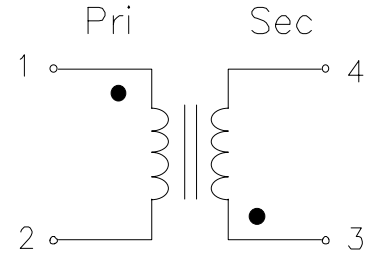

**Supplementary Insulation and 1.5 mm Creepage per IEC 950**

### Physical Dimensions inches (mm)

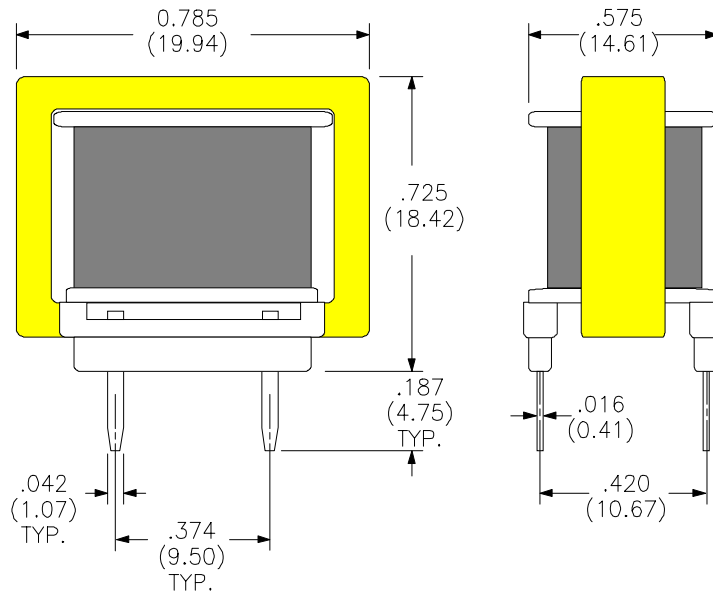

RHOMBUS P/N: **T-30006**

CUST P/N:

NAME:

DATE: **9/19/95**

SHEET: 1 OF 1