

# VDSL LINE TRANSFORMER SURFACE MOUNT MAGNETICS


- EN60950 Basic Insulation compliant 250Vrms
- SMD compact foot print design
- Industrial operating temp: -40°C to +85°C

## Electrical Specifications @25°C

Part Number	Turns Ratio (10KHz,0.1V)	OCL (10KHz,0.1V)	LL (100KHz,0.1V)	Cww (100KHz,0.1V)		
AEP010SI	1-4:8-6 (short 2-3,5-7)	1-4 (short 2-3)	8-6 (short 1-2-3-4, 5-7)	1-8 (short 2-3,5-7)		
	2:1 ±2%	420uH ±10%	1.0uH max	25pF max		
	Continue					
	DCR		LB			
	1-4(short 2-3)	8-6( short 5-7)	12MHz	17MHz	30MHz	
0.9Ω max	0.5Ω max	-44 dB min	-42 dB min	-30 dB min	THD 30KHz,2.7Vrms	Hi-Pot VAC (1mA/60s)
					-74dB max	1500

All specifications subject to change without notice.

## MECHANICAL

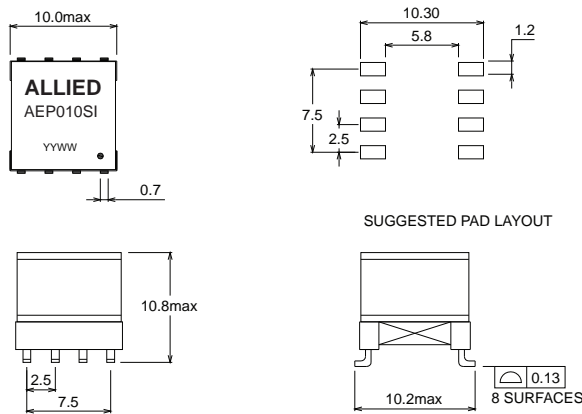

Units:mm  
Unless otherwise specified all tolerances are: ±0.25 in mm

## SCHEMATICS

