

PRODUCT SPECIFICATION

DATE:04/24/2012

cosmo ELECTRONICS CORPORATION	Photocoupler : KPS2801	NO.61P05017	REV.
		SHEET 1 OF 6	5

High Isolation Voltage DC Input Response Type SSOP Photocoupler

●Features

- 1.Halogen Free.
- 2.Pb free and RoHS compliant.
- 3.High isolation voltage(BV=3750Vrms).
- 4.Small and thin package(4pin SOP,Pin pitch 1.27mm).
- 5.High collector to emitter voltage(VCEO=80V).
- 6.High-speed switching $t_r=3\mu s$ (typ.), $t_f=5\mu s$ (typ.).
- 7.Agency Approvals
 - UL approved : No.E169586
 - CUL approved : No.E169586
 - VDE approved : No.40010469
 - FIMKO approved : EN 60065 , EN 60950-1 No.FI23460

●Applications


1. Programmable logic controllers.
2. Measuring instruments.
3. Power supply.
4. Hybrid IC.

PRODUCT SPECIFICATION

DATE:04/24/2012


cosmo ELECTRONICS CORPORATION	Photocoupler : KPS2801	NO.61P05017	REV. 5
		SHEET 2 OF 6	

1. OUTSIDE DIMENSION : UNIT (mm)

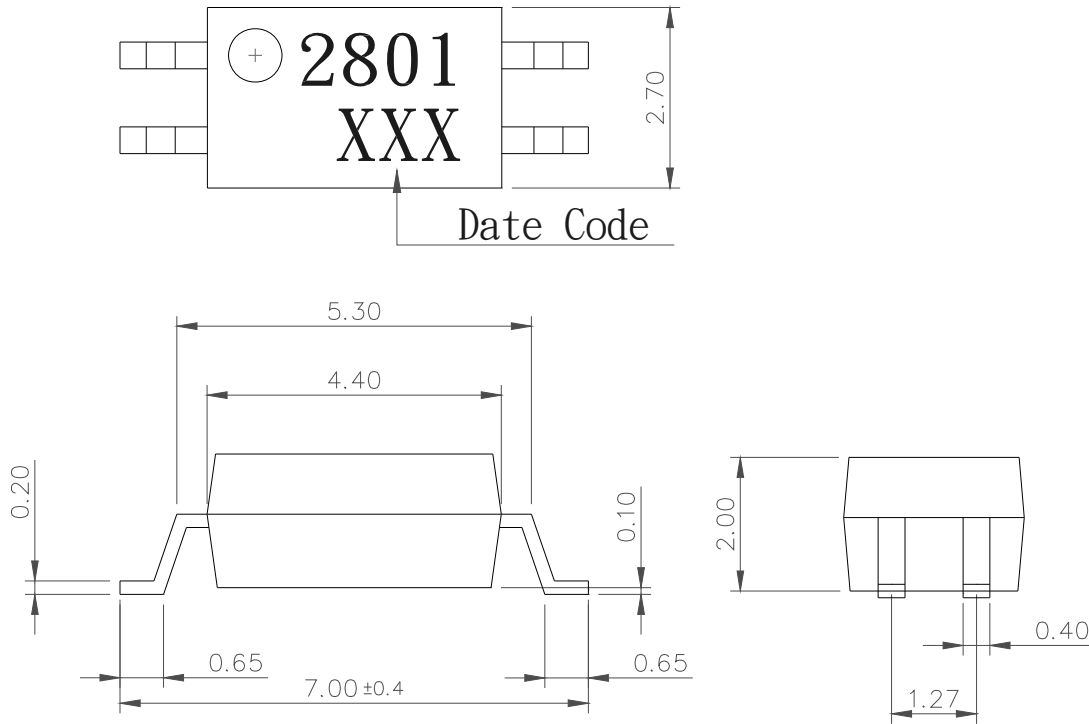

TOLERANCE : ±0.2mm

2. SCHEMATIC : TOP VIEW

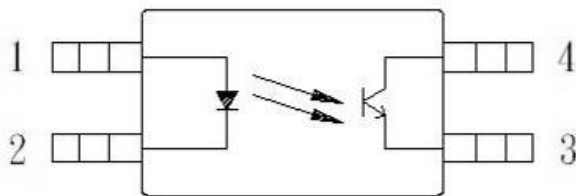

- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

PRODUCT SPECIFICATION

DATE:04/24/2012

cosmo ELECTRONICS CORPORATION	Photocoupler :	NO.61P05017	REV. 5
	KPS2801	SHEET 3 OF 6	

●Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	
Input	Forward current	I_F	50	mA
	Peak forward current(*1)	I_{FP}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	60	mW
	Power dissipation derating	$P_D/^\circ C$	0.6	mW/ $^\circ C$
Output	Collector-emitter voltage	V_{CEO}	80	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	160	mW
	Collector power dissipation derating	$P_C/^\circ C$	1.2	mW/ $^\circ C$
Isolation voltage 1 minute(*2)	V_{iso}	3750	V_{rms}	
Operating temperature	T_{opr}	-30 to +115	$^\circ C$	
Storage temperature	T_{stg}	-55 to +150	$^\circ C$	

*1 $PW=100\mu s$, Duty Cycle=1%.


*2 AC voltage for 1minute at $T=25^\circ C$, $RH=60\%$ between input and output.

●Electro-optical Characteristics

$T_a=25^\circ C$

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F $I_F=5mA$	-	1.1	1.4	V
	Reverse current	I_R $V_R=5V$	-	-	5	μA
	Terminal capacitance	C_t $V=0, f=1MHz$	-	60	-	pF
Output	Collector dark current	I_{CEO} $V_{CE}=80V, I_F=0mA$	-	-	100	nA
Transfer characteristics	Current transfer ratio(I_C/I_F)	CTR $I_F=5mA, V_{CE}=5V$	50	-	600	%
	Collector-emitter saturation	$V_{CE(sat)}$ $I_F=10mA, I_C=2mA$	-	0.1	0.3	V
	Isolation resistance	R_{iso} $DC500V$	5×10^{10}	10^{11}	-	ohm
	Floating capacitance	C_f $V=0, f=1MHz$	-	0.4	-	pF
	Response time (Rise)(*3)	t_r	$V_{ce}=5V, I_C=2mA, R_L=100ohm$	-	3	18
Response time (Fall)(*3)	t_f	-		5	18	μs

*3 Test circuit for switching time

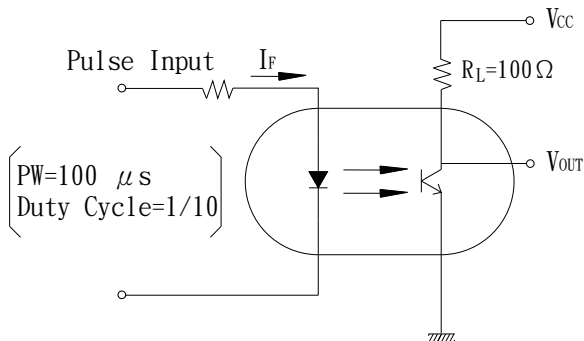

Classification table of current transfer ratio is shown below.

Model NO.	CTR(%)
KPS28010A	80 TO 160
KPS28010B	130 TO 260
KPS28010C	200 TO 400
KPS28010D	300 TO 600
KPS28010E	50 TO 600

PRODUCT SPECIFICATION

DATE:04/24/2012

cosmo

ELECTRONICS CORPORATION

Photocoupler :

KPS2801

NO.61P05017

SHEET 4 OF 6

REV.

5

Fig.1 Current Transfer Ratio vs. Forward Current

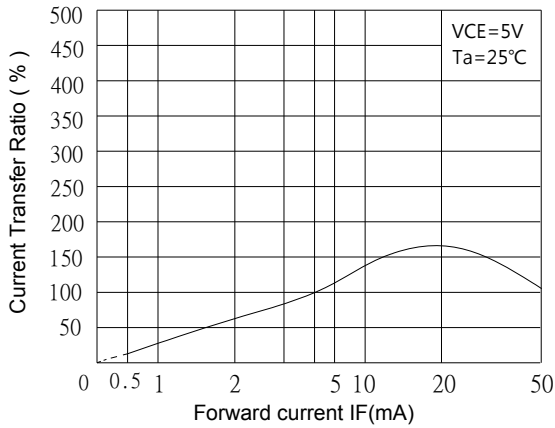


Fig.2 Collector Power Dissipation vs. Ambient Temperature

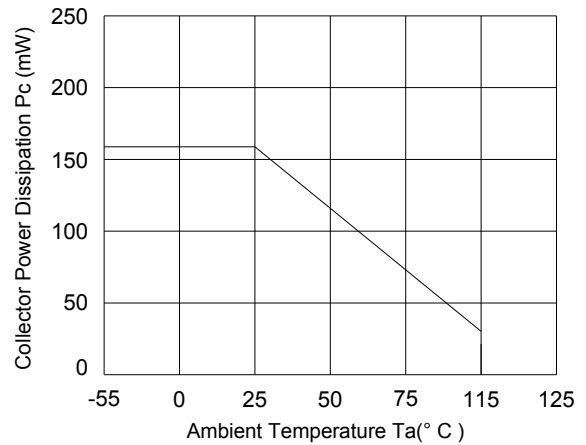


Fig.3 Collector Dark Current vs. Ambient Temperature

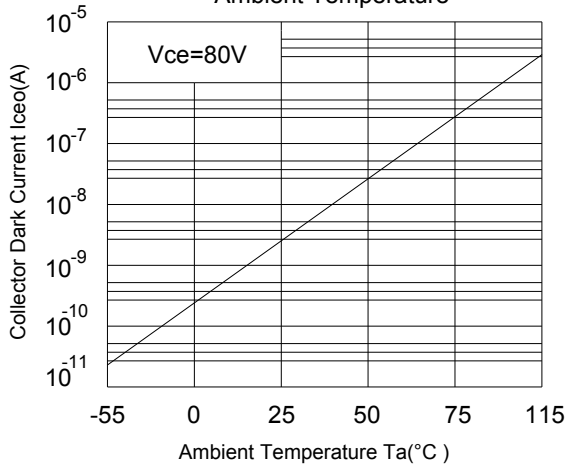


Fig.4 Forward Current vs. Ambient temperature

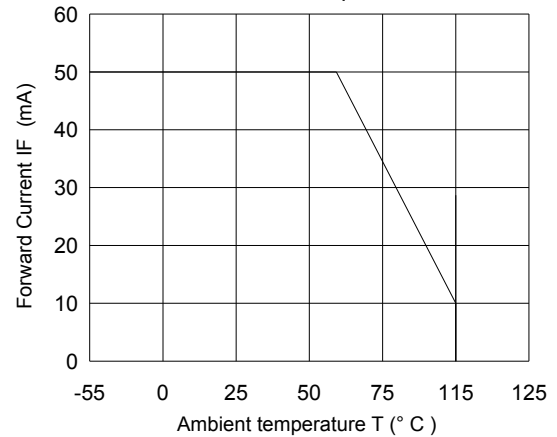


Fig.5 Forward Current vs. Forward Voltage


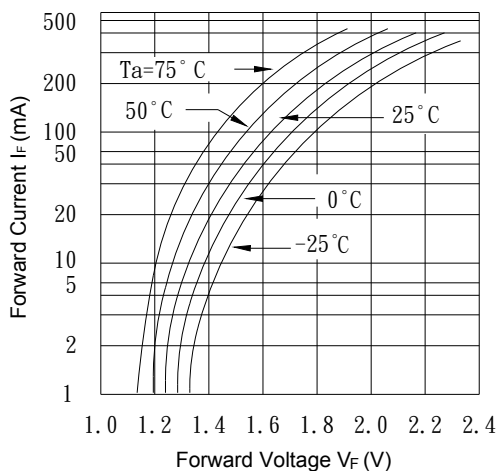


Fig.6 Collector Current vs. Collector-emitter Voltage

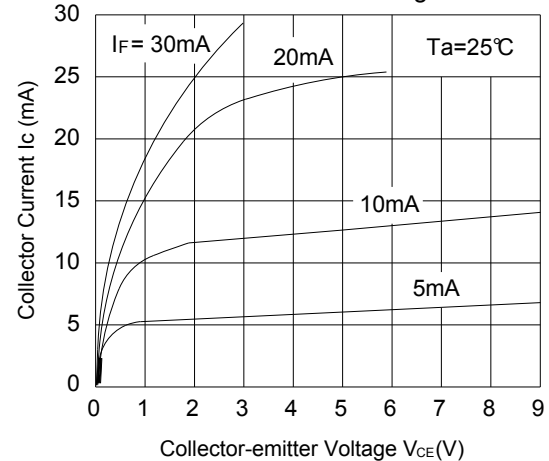

PRODUCT SPECIFICATION

DATE:04/24/2012

cosmo

ELECTRONICS CORPORATION

Photocoupler :

KPS2801

NO.61P05017

SHEET 5 OF 6

REV.

5

Fig.7 Collector-emitter Saturation Voltage vs. Ambient Temperature

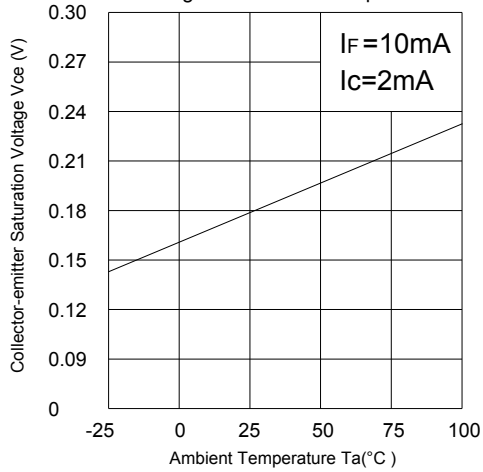


Fig.8 Collector-emitter Saturation Voltage vs. Forward Current

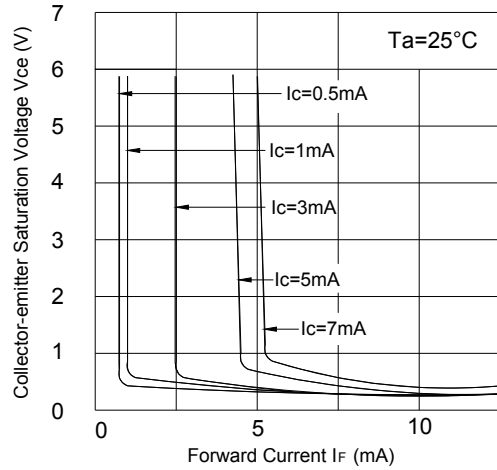


Fig.9 Response Time vs. Load Resistance

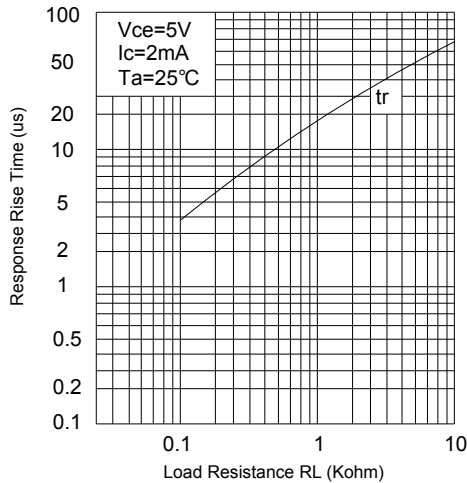


Fig.10 Response Time vs. Load Resistance


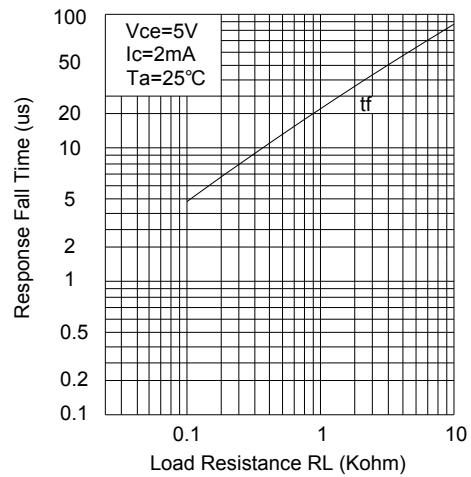


Fig.11 Relative Current Transfer Ratio vs. Ambient Temperature

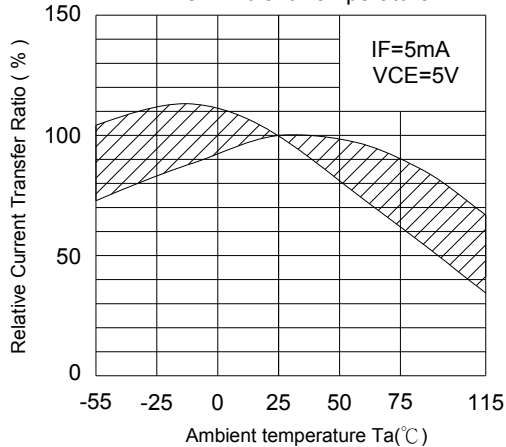

PRODUCT SPECIFICATION

DATE:04/24/2012

cosmo ELECTRONICS CORPORATION	Photocoupler : KPS2801	NO.61P05017	REV.
		SHEET 6 OF 6	5

NOTICE

The information contained in this document is a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as:

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.