


PARAMETER		UNITS
Turns Ratio	1 : 1 ±2%	
Primary Impedance	600	Ω
Secondary Impedance	600	Ω
Insertion Loss : 1 kHz	1.0 Max.	dB
Frequency Response: 200 Hz - 100 kHz	±2	dB
Return Loss : 200 Hz	20 Min.	dB
1 kHz	30 Min.	dB
10 kHz	25 Min.	dB
Primary DC Resistance	55 Max.	Ω
Secondary DC Resistance	70 Max.	Ω
Isolation (HI-POT)	1500	V _{RMS}
Primary DC	None	



DIAGRAM



Typical applications: telephone sets, PBXs, DLC systems, central office switches.

Optimized insertion loss and return loss for audio frequency range, including voiceband.

Physical Dimensions in inches (mm)

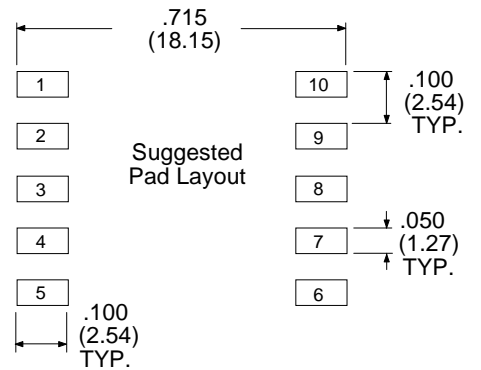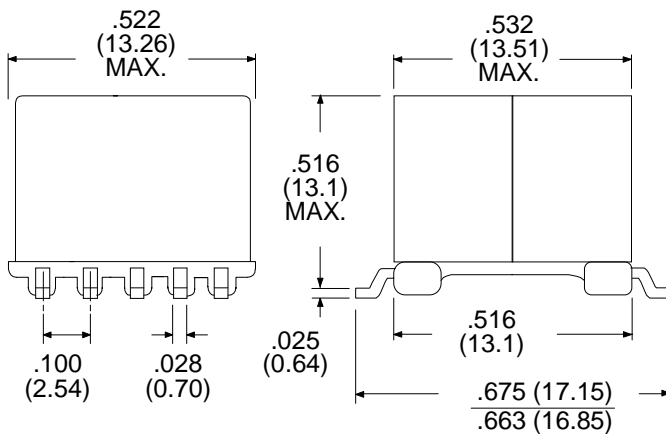

RHOMBUS P/N: **T-30411G**

CUST P/N:

NAME:

DATE: **11-29-00**

SHEET: 1 OF 1