


Customer Information Sheet

DRAWING No.: D840XXB-XX SHEET 2 OF 2 IF IN DOUBT - ASK © NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

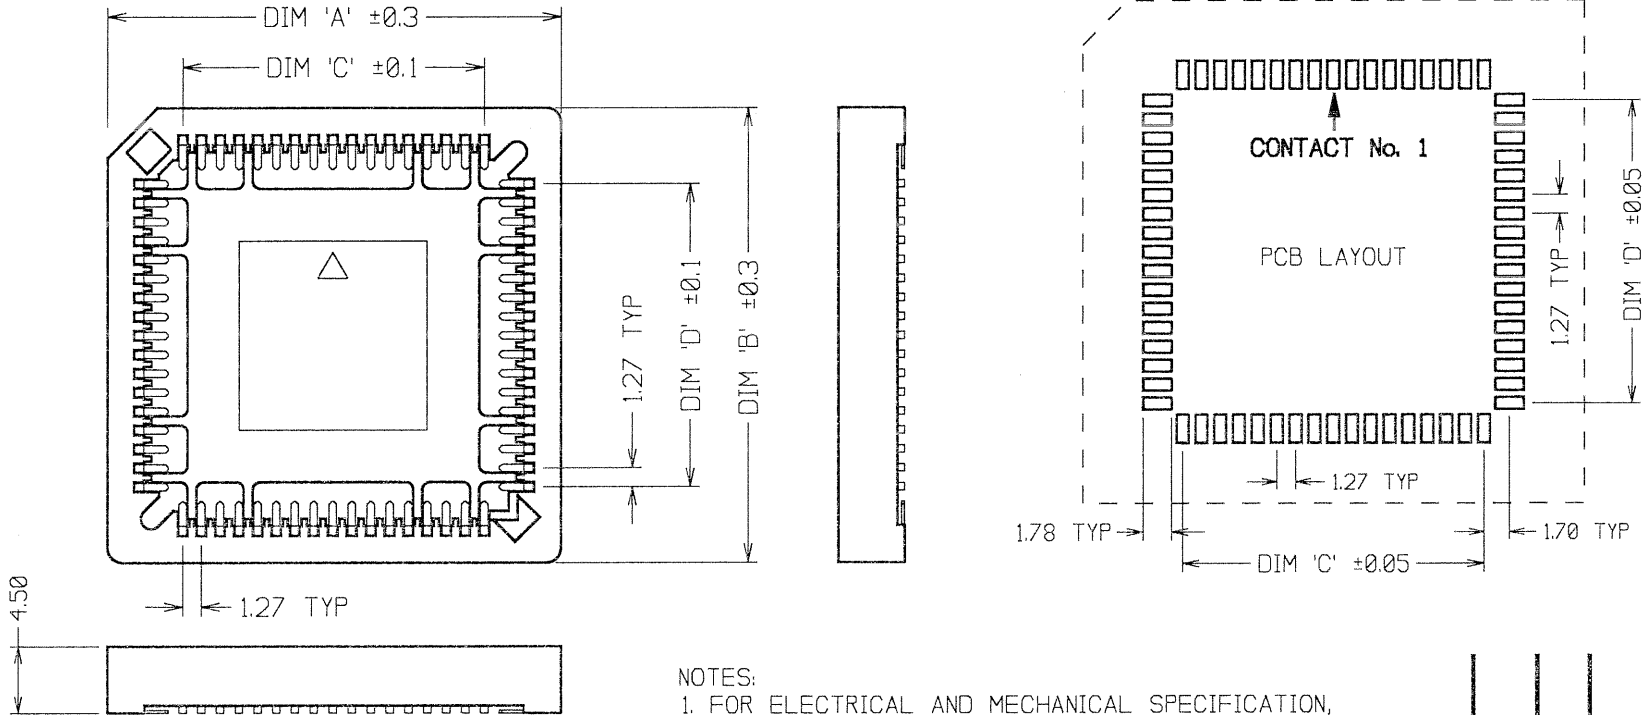

- NOTES:
- FOR ELECTRICAL AND MECHANICAL SPECIFICATION, SEE COMPONENT SPECIFICATION C020XX (LATEST ISSUE).
 - ALL TOLERANCES ARE ±0.20 UNLESS OTHERWISE STATED.

SPECIFICATION:

MATERIAL:
 MOULDING = PPS (BROWN) UL94V-0
 CONTACTS = PHOSPHOR BRONZE

FINISH:
 46 = 100% TIN

ELECTRICAL:
 CURRENT RATING = 1A
 CONTACT RESISTANCE = 30 MILLIOHMS MAX
 INSULATION RESISTANCE = 1000 MEGOHMS MIN

ENVIRONMENTAL:
 OPERATING TEMPERATURE = -50°C TO +105°C

PACKING:
 TUBE

No. OF CONTACTS	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'
32	18.20	20.74	7.62	10.16
44	23.28	23.28	12.70	12.70
68	30.90	30.90	20.32	20.32
84	35.98	35.98	25.40	25.40

ORDER CODE: **D840XXB-XX**

No. OF CONTACTS: _____
 (SEE TABLE)

FINISH: _____
 46 = 100% TIN

JMB	5	17.10.06	9520
NAME	ISS.	DATE	C/NOTE
APPROVED: <i>JMB</i>			
CHECKED: <i>NSBC</i>			
DRAWN: A. J. FILLINCHAM			
CUSTOMER REF.:			
ASSEMBLY DRG.:			



HARWIN USA
 TEL: 603 893 5376 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: LOW PROFILE SMT PLCC SOCKET NON - POLARIZED

DRAWING NUMBER: D840XXB-XX

SHT 2 OF 2