

D4 Patchcord

Description:

The D4 connector type patchcords are offered for MM or SM applications with PC polishing method. Two boot dimension allows to use different cable or fiber diameters.



Features:

- Singlemode and multimode versions available
- Terminates up to 3.00 mm diameter cable jacket
- Ceramic ferrules are configured for easy hand or machine "Super" PC and "Ultra" Polishing
- Optional boot colors available
- Protective dust cap included
- Hybrid patchcord version available


Specifications:

| | |
|-----------------------|---|
| Insertion loss (IL) | typ. 0.25 dB |
| Return loss (RL) | > 40 dB |
| Strain relief | 100 N |
| Operating temperature | -40 °C to +80 °C, conditioned by cable type |
| Durability | min 500 cycles |
| Assembly procedure | glue and polish |
| Connection | physical contact |
| Lock mechanism | Coupling nut |
| Standards | UL 94 V-0 rated material |
| Ferrule material | full ceramic zirconia |
| Connector material | nickel plated brass, thermoplastic rubber |


Application:

- LAN, WAN
- Measuring Technique
- Utilities
- Railways

Ordering code:

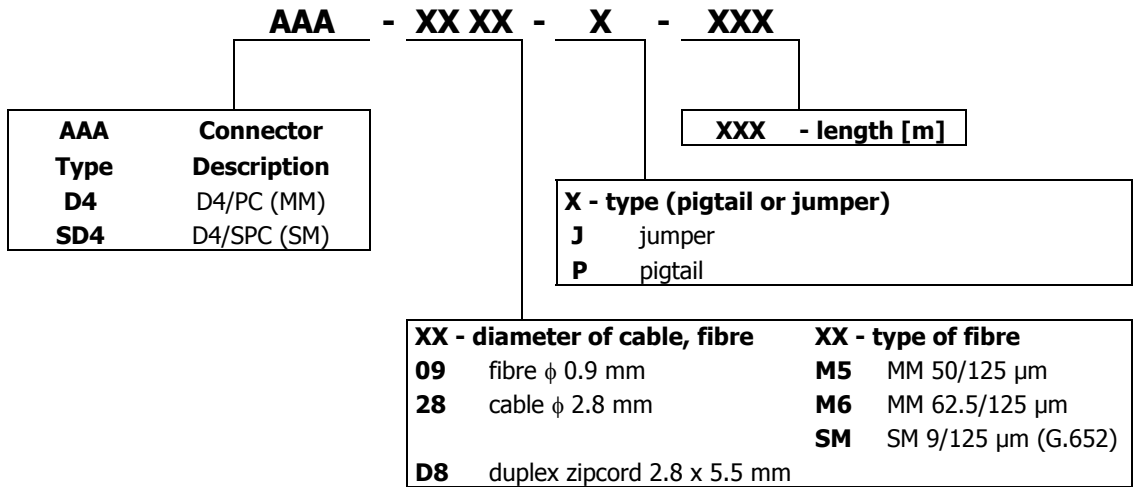

Dimensions:

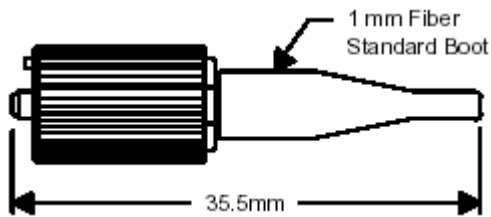

Sample:

SD4-SPC-28 SM-J-010

