

SMT Power Inductor


HAH1378 Type

Features

- RoHS compliant.
- Low profile (7.8mm max. height) SMD type.
- Magnetically shielded, suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor application.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



Mechanical Dimension:

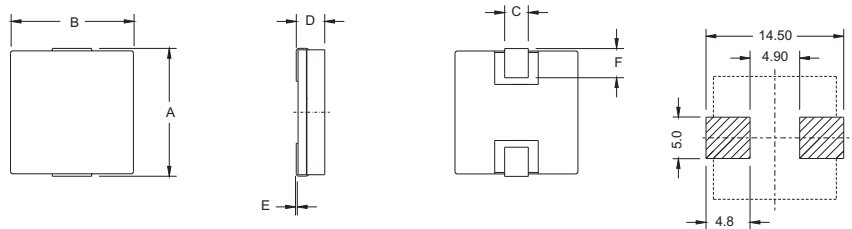

RECOMMENDED PAD PATTERNS

UNIT : mm / inch
 A = 13.0±0.5 / 0.512±0.020
 B = 12.7±0.4 / 0.500±0.016
 C = 2.40 / 0.094
 D = 7.80 / 0.307 Max.
 E = 0.03 / 0.001
 F = 3.00 / 0.118

Electrical Characteristics: At 25°C: 100KHz, 1V

PART NO.	Lo ¹ (uH)	Li (uH) ±20%	DCR (mΩ) MAX	Isat ² (Adc)
HAH1378-0R8	0.80	0.70	1.20	40
HAH1378-1R2	1.20	1.00	1.80	32
HAH1378-2R0	2.00	1.60	2.90	20
HAH1378-2R5	2.50	2.00	3.00	22
HAH1378-3R6	3.60	2.80	4.30	16
HAH1378-4R7	4.70	3.70	4.70	12
HAH1378-6R0	6.00	4.80	9.20	12
HAH1378-7R3	7.30	5.80	10.00	12
HAH1378-8R8	8.80	7.00	11.00	9
HAH1378-10R4	10.40	8.30	12.00	8

1. Lo is the initial inductance.
2. Isat is the DC current which cause the inductance drop to Li.
3. Operating temperature : -20°C to 105°C (including self-temperature rise).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

http://www.deltaww.com