DATA SHEET

Part No.	MVCA1Z MVCA2Z
Package Code No.	

MVCA1Z, MVCA2Z Panasonic

MVCA1Z, MVCA2Z

SD Card Host IP

Overview

The SD Memory Card, which is being jointly developed by Matsushita Electric Industrial Co., Ltd., Toshiba Corporation and SanDisk Corporation, is a memory card with a copyright protection function. Matsushita was the first company to develop an SD host I/F controller embedded with an authentication and cryptographic calculation module. We ensured the quality of the controller by detailed verification with the RTL and an evaluation board. Finally, we designated the controller as IP (Intellectual Property) by means of careful documentation and have maintained the design data which is easily reusable.

We have design support of this IP by collaboration with Toppan Printing Co., Ltd.

High performance, high quality and many IP reuse/adopt results have been widely praised, and an LSI IP Design Award has been granted to this IP.

■ Feature

- CPRM (Content Protection for Recordable Media*) function implementation with SD host device is easy to use with hardware IP.
- SD host device has low power consumption with SD audio header analyze function.
- With CPRM IP(MVCA1Z) or without CPRM IP(MVCA2Z) are freely selectable.

Applications

Any SD memory Card Host Device (cellular phone/PDA/DSC, etc.)


■IP deliverable

- Verilog-HDL RTL source code for function simulation
- Verilog-HDL RTL source code for synthesis
- Verilog-HDL test-bench/test-pattern source code for function simulation
- Verilog-HDL source code for function simulation
- Encrypted CPRM function model for function simulation
- Execution script
 - simulation execute script, synthesis script, etc.
- Implementation tool for CPRM
- Sample software
 - Card driver, file system, authentication library
- Documentation
 - register specifications, implementation manual, function specifications, How to implement CPRM, etc.
- * CPRM is a copy protection technology. It is developed by 4C Entity, LLC.

Note: The detailed information for this product is disclosed after non-disclosure agreement between your company and MEI.

SDC00061AEM 2

■ Block diagram

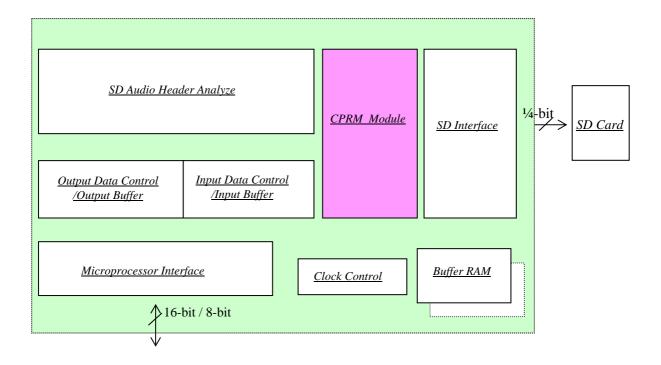

■ IP functions

IP original function	SD I/F, CPU I/F	 Full support for SD memory / IO card interface Can select single buffer or double buffer (SD card to Host interface buffer) Support 16-bit / 8-bit CPU interface, Fixed cycle or Handshake
	CPRM	Host IP implement authentication and secure access with hardware
	SD audio	 Includes Header analyze function SD Audio 1.1 Move, Preview support Available for play during download
	Low power	 For standby mode (Card not inserted) Available for card detection by supply only card detection clock Available for gated clock control of each function unit

SDC00061AEM 3

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
 Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support
 systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.