

1

2

3


4

5

6



7

A

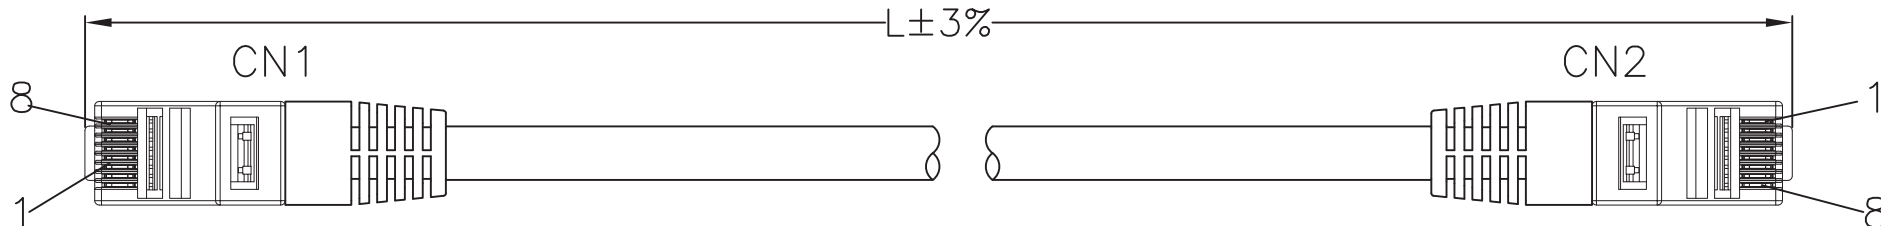




A

B

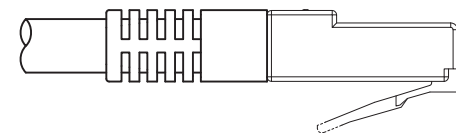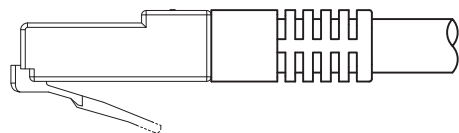

B

C

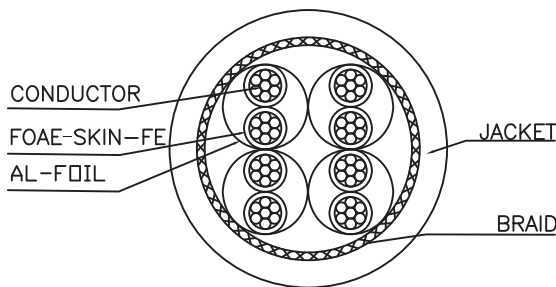


C

D

PIN OUT

CN1	WIRE COLOR	CN2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

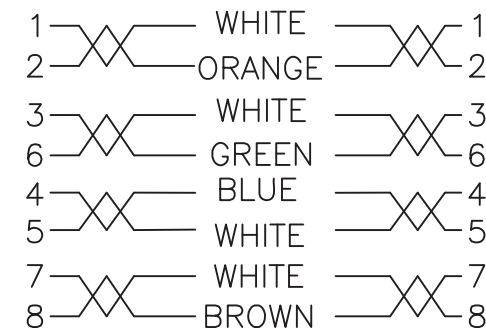

D

E

Material

- Cable: SSTP (26AWG*1PR+A)*4+B+PVC - OD:5.8±0.2mm
- RJ45 Connector: 8P8C, Two fork gold plated contacts 50μ" with metal housing
- Molding PVC: 45P
- Cable/Molding color: Grey

E

F

Electrical

- Open/short/intermittence: 100%

Order Code: A-MCSSP60xxx-R

Order lengths in meter: 0.5, 1, 2, 3, 5, 7, 10, 15, 20, 30

F

G

Unit: mm



Scale						Date	Name	Title
TOLERANCE						Drawn	Wilson	Cat6 SSTP Patch cable Shielded, 26AWG, Grey
X.	±X					Approved	Groll	ASSMANN WSW-No. A-MCSSP60xxx-R
X.X	±X							Drawing-No.
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°	①	Update	19.02.13	Wilson			rev01
Angle	TOL	Id.	Modification	Date	Name			Sheet
						<small>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</small>		1/1

G

H

H

1

2

3

4

5

6

7