



Bestückungsplan / contact layout



■ bestückt / assemble

Leiterplatten-Lochbild / PCB drillhole pattern

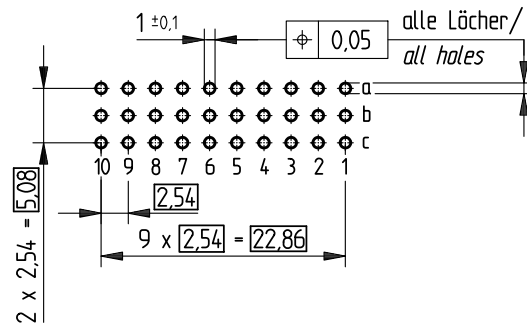

Elastische Einpresszone mit Übergabesteckzone / compliant pressfit zone with mating transfer zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6

diameter of drilled hole see drawing 164062/No.6

- 1) $\phi 1,0 \pm 0,09$ Durchmesser des metallisierten Loches
 $\phi 1,0 \pm 0,06$ Diameter of finished plated-through hole

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

ohne Flansch
without flange

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation Federleiste C/3, 30 EE Fem. Con. C/3, 30 Pressfit	
Subject to modification without prior notice. Drawing will not be updated.		 www.ERNI.com	284950	
Index	Date	H:00066096.SZA	STVC/3	