


Features

- High current capability
- High surge current capability
- High reliability
- High efficiency
- Low power loss
- Low forward voltage drop
- Low cost
- Pb / RoHS Free

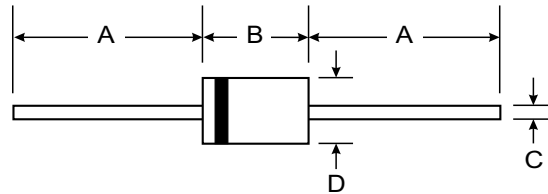

Mechanical Data

- Case : DO-41 Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 0.339 gram

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATING	SYMBOL	11DQ03	11DQ04	11DQ05	11DQ06	11DQ09	11DQ10	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	30	40	50	60	90	100	V
Maximum RMS Voltage	V _{RMS}	21	28	35	42	63	70	V
Maximum DC Blocking Voltage	V _{DC}	30	40	50	60	90	100	V
Maximum Average Forward Current	I _{F(AV)}	1.1						A
	T _C	75		84		75		°C
Maximum Peak Forward Surge Current single half sine wave superimposed on rated load	I _{FSM}	42		26		42		A
Maximum Forward Voltage at I _F = 1 A, T _J = 25°C	V _F	0.55		0.58		0.85		V
		at I _F = 2 A, T _J = 25°C		0.71		0.76		
Maximum Reverse Current at T _J = 25°C	I _R	1.0		1.0		0.5		mA
Rated DC Blocking Voltage T _J = 125°C	I _{R(H)}	6.0		11		1.0		
Junction Temperature Range	T _J	- 40 to + 150						°C
Storage Temperature Range	T _{STG}	- 40 to + 150						°C



RATING AND CHARACTERISTIC CURVES (11DQ03 - 11DQ10)

FIG.1 - FORWARD CURRENT DERATING CURVE

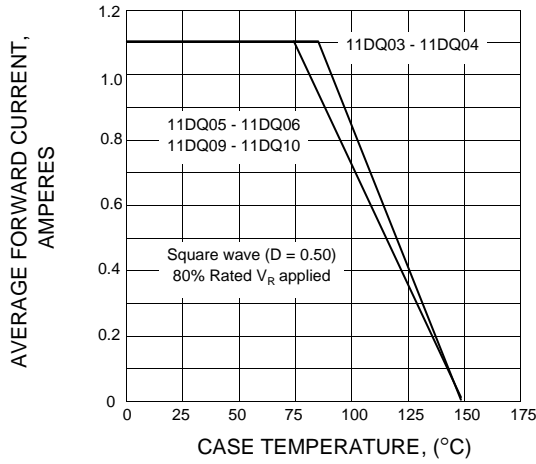


FIG.2 - MAXIMUM FORWARD SURGE CURRENT

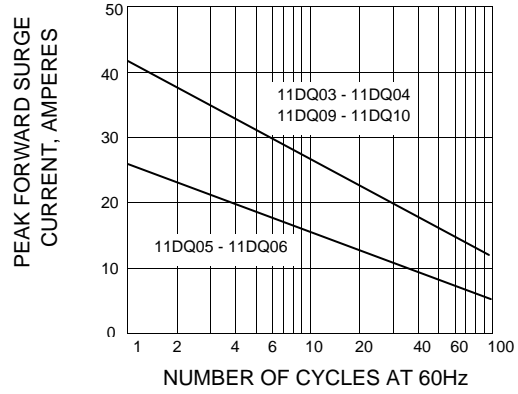


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

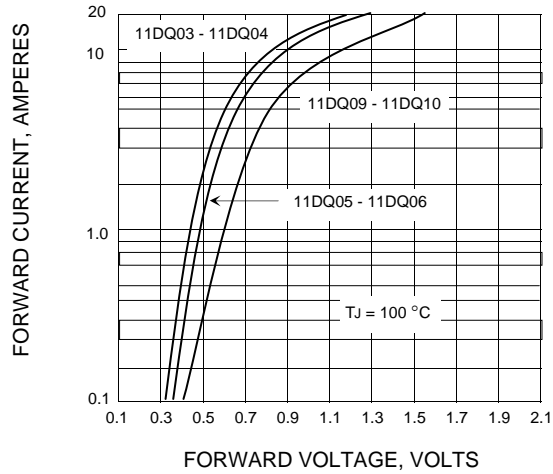


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

