


High Power Low Cost Inductors

Model HM53

Features and Benefits

- Insulation Resistance, Minimum 100 MΩ
- Operating Temperature Range -40°C to +125°C
- Ambient Temperature, Maximum 85°C
- Temperature Rise, Maximum 40°C
- Operating Frequency Up to 400kHz
- RoHS Compliant

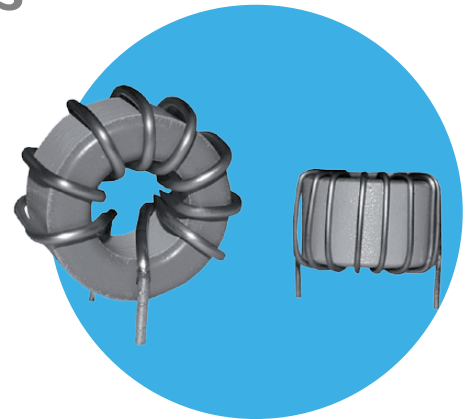

Specifications @ 25°C / Packaging

| Part Number | Inductance ⁽¹⁾ Control Value μH ±20% | Rated ⁽²⁾ Inductance μH Typ. | Rated Current Adc | DCR mΩ Max. | Dimensions (mm) L / W / Ht | | Quantity Per Carton (Units) | |
|----------------------|--|--|-------------------------|-------------------|-------------------------------|--------------------|--------------------------------|---------------|
| | | | | | Vert. Mount | Hor. Mount | Vert. Mount | Hor. Mount |
| HM53-0008VLF | 1.23 | 0.8 | 15.0 | 2.5 | 14.0 / 8.5 / 14.0 | - | 660 | - |
| HM53-001R1_LF V or H | 1.44 | 1.1 | 14.0 | 3.0 | 23.0 / 14.0 / 23.0 | 23.0 / 23.0 / 14.0 | 360 | 300 |
| HM53-001R6_LF V or H | 1.72 | 1.6 | 8.0 | 4.0 | 16.0 / 11.0 / 16.0 | 16.0 / 16.0 / 11.0 | 560 | 500 |
| HM53-001R8_LF V or H | 2.6 | 1.8 | 15.0 | 3.5 | 23.0 / 14.0 / 23.0 | 23.0 / 23.0 / 14.0 | 360 | 180 |
| HM53-001R9_LF V or H | 2.7 | 1.9 | 10.0 | 5.1 | 17.5 / 11.4 / 17.5 | 17.5 / 17.5 / 11.4 | 660 | 500 |
| HM53-002R0_LF V or H | 2.8 | 2.0 | 8.5 | 4.8 | 16.0 / 9.0 / 16.0 | 16.0 / 16.0 / 9.0 | 560 | 500 |
| HM53-003R0_LF V or H | 4.4 | 3.1 | 13.5 | 4.5 | 24.5 / 14.0 / 24.5 | 24.5 / 24.5 / 14.0 | 360 | 320 |
| HM53-005R5_LF V or H | 7.9 | 5.5 | 8.5 | 8.9 | 20.5 / 13.0 / 20.5 | 20.5 / 20.5 / 13.0 | 360 | 180 |
| HM53-007R8_LF V or H | 11.1 | 7.8 | 5.7 | 12.9 | 17.0 / 13.5 / 17.0 | 17.0 / 17.0 / 13.5 | 450 | 500 |
| HM53-009R5_LF V or H | 13.5 | 9.5 | 9.0 | 8.1 | 23.0 / 19.0 / 23.0 | 23.0 / 23.0 / 19.0 | 180 | 210 |
| HM53-101R5VLF | 2.7 | 1.5 | 15.0 | 3.3 | 18.0 / 10.0 / 18.0 | - | 560 | - |
| HM53-101R6VLF | 4.0 | 1.6 | 21.0 | 6.5 | 17.0 / 9.0 / 17.0 | - | 560 | - |
| HM53-103R3VLF | 4.0 | 3.3 | 10.0 | 10.0 | 15.0 / 8.0 / 15.0 | - | 560 | - |
| HM53-108R0_LF V or H | 10.1 | 8.0 | 3.0 | 10.5 | 16.2 / 8.5 / 16.2 | 16.2 / 16.2 / 8.5 | 660 | 500 |
| HM53-10180_LF V or H | 25.3 | 17.9 | 2.0 | 20.5 | 16.2 / 8.0 / 16.2 | 16.2 / 16.2 / 8.0 | 500 | 500 |
| HM53-10320_LF V or H | 50.3 | 32.3 | 2.6 | 59.1 | 16.2 / 9.0 / 16.2 | 16.2 / 16.2 / 9.0 | 560 | 500 |
| HM53-10650_LF V or H | 104.0 | 65.2 | 2.4 | 108.6 | 15.5 / 12.4 / 15.5 | 15.5 / 15.5 / 12.4 | 560 | 250 |
| HM53-10101VLF | 121.0 | 100.0 | 5.0 | 67.0 | 27.0 / 16.5 / 27.0 | - | 240 | - |
| HM53-10111_LF V or H | 151.7 | 106.4 | 2.3 | 165.9 | 20.7 / 9.4 / 20.7 | 20.7 / 20.7 / 9.4 | 360 | 300 |
| HM53-10171_LF V or H | 250.9 | 175.2 | 2.2 | 224.2 | 20.9 / 13.0 / 20.9 | 20.9 / 20.9 / 13.0 | 360 | 210 |
| HM53-10351_LF V or H | 505.0 | 354.3 | 1.9 | 375.1 | 24.0 / 15.3 / 24.0 | 24.0 / 24.0 / 15.3 | 180 | 140 |
| HM53-10531_LF V or H | 754.4 | 529.2 | 2.4 | 468.1 | 29.8 / 17.4 / 29.8 | 29.8 / 29.8 / 17.4 | 90 | 90 |
| HM53-10701_LF V or H | 1000.4 | 701.4 | 2.1 | 679.4 | 29.8 / 17.1 / 29.8 | 29.8 / 29.8 / 17.1 | 90 | 90 |
| HM53-208R0_LF V or H | 10.6 | 8.0 | 6.0 | 8.3 | 22.0 / 9.5 / 22.0 | 22.0 / 22.0 / 9.5 | 360 | 300 |
| HM53-20190_LF V or H | 25.0 | 19.1 | 4.0 | 20.3 | 22.0 / 9.0 / 22.0 | 22.0 / 22.0 / 9.0 | 360 | 300 |
| HM53-20350_LF V or H | 50.0 | 35.0 | 4.9 | 29.1 | 21.6 / 13.6 / 21.6 | 21.6 / 21.6 / 13.6 | 360 | 320 |
| HM53-20580_LF V or H | 73.9 | 58.1 | 2.5 | 59.9 | 22.0 / 9.0 / 22.0 | 22.0 / 22.0 / 9.0 | 360 | 300 |
| HM53-20710_LF V or H | 101.7 | 70.8 | 4.3 | 48.5 | 24.0 / 16.6 / 24.0 | 24.0 / 24.0 / 16.6 | 200 | 140 |
| HM53-20101_LF V or H | 148.0 | 103.6 | 4.0 | 70.5 | 30.6 / 11.4 / 30.6 | 30.6 / 30.6 / 11.4 | 90 | 135 |
| HM53-20171_LF V or H | 251.1 | 175.4 | 4.2 | 96.0 | 31.2 / 19.0 / 31.2 | 31.2 / 31.2 / 19.0 | 90 | 90 |
| HM53-20351_LF V or H | 499.4 | 349.0 | 3.3 | 183.0 | 36.7 / 14.8 / 36.7 | 36.7 / 36.7 / 14.8 | 45 | 75 |
| HM53-20521_LF V or H | 749.3 | 521.9 | 3.4 | 225.4 | 43.3 / 18.2 / 43.3 | 43.3 / 43.3 / 18.2 | 45 | 90 |
| HM53-306R8_LF V or H | 9.7 | 6.8 | 11.1 | 8.3 | 22.2 / 13.9 / 22.2 | 22.2 / 22.2 / 13.9 | 180 | 210 |
| HM53-30150_LF V or H | 21.3 | 14.9 | 9.3 | 17.8 | 24.5 / 16.6 / 24.5 | 24.5 / 24.5 / 16.6 | 200 | 140 |
| HM53-30350_LF V or H | 49.6 | 34.9 | 9.4 | 21.9 | 32.3 / 18.9 / 32.3 | 32.3 / 32.3 / 18.9 | 90 | 90 |
| HM53-30580_LF V or H | 78.0 | 58.5 | 4.0 | 40.9 | 30.0 / 13.0 / 30.0 | 30.0 / 30.0 / 13.0 | 200 | 140 |
| HM53-30690_LF V or H | 97.2 | 67.9 | 7.5 | 31.0 | 37.8 / 16.8 / 37.8 | 37.8 / 37.8 / 16.8 | 45 | 75 |
| HM53-30101_LF V or H | 150.6 | 105.4 | 7.5 | 45.6 | 46.4 / 19.8 / 46.4 | 46.4 / 46.4 / 19.8 | 45 | 90 |
| HM53-30181_LF V or H | 254.4 | 178.2 | 8.1 | 48.2 | 53.7 / 24.3 / 53.7 | 53.7 / 53.7 / 24.3 | 45 | 45 |
| HM53-407R0_LF V or H | 10.0 | 7.0 | 13.5 | 7.9 | 25.7 / 18.0 / 25.7 | 25.7 / 25.7 / 18.0 | 45 | 90 |
| HM53-40150_LF V or H | 21.0 | 14.7 | 14.5 | 11.5 | 32.4 / 19.8 / 32.4 | 32.4 / 32.4 / 19.8 | 90 | 90 |
| HM53-40360_LF V or H | 52.3 | 36.5 | 10.2 | 18.3 | 39.0 / 16.8 / 39.0 | 39.0 / 39.0 / 16.8 | 45 | 75 |
| HM53-40550_LF V or H | 74.5 | 54.8 | 6.0 | 26.1 | 35.0 / 16.0 / 35.0 | 35.0 / 35.0 / 16.0 | 90 | 90 |
| HM53-40710_LF V or H | 101.4 | 71.1 | 9.1 | 21.2 | 48.5 / 21.8 / 48.5 | 48.5 / 48.5 / 21.8 | 45 | 45 |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Model HM53

Specification @ 25°C / Packaging (Cont'd)


| Part Number | Inductance ⁽¹⁾ Control Value μH ±20% | Rated ⁽²⁾ Inductance μH Typ. | Rated Current A dc | DCR mΩ Max. | Dimensions (mm) L / W / Ht | | Quantity Per Carton (Units) | |
|----------------------|--|--|--------------------------|-------------------|-------------------------------|--------------------|--------------------------------|---------------|
| | | | | | Vert. Mount | Hor. Mount | Vert. Mount | Hor. Mount |
| HM53-40111_LF V or H | 152.8 | 106.8 | 10.5 | 29.8 | 54.5 / 25.4 / 54.5 | 54.5 / 54.5 / 25.4 | 45 | 45 |
| HM53-507R0_LF V or H | 10.0 | 7.0 | 20.9 | 5.6 | 34.0 / 21.4 / 34.0 | 34.0 / 34.0 / 21.4 | 90 | 75 |
| HM53-50150_LF V or H | 21.2 | 14.8 | 16.0 | 8.2 | 40.5 / 18.0 / 40.5 | 40.5 / 40.5 / 18.0 | 45 | 75 |
| HM53-50370_LF V or H | 52.4 | 36.7 | 12.7 | 15.2 | 47.5 / 21.3 / 47.5 | 47.5 / 47.5 / 21.3 | 45 | 45 |
| HM53-50550_LF V or H | 77.6 | 54.2 | 10.5 | 21.1 | 47.5 / 21.3 / 47.5 | 47.5 / 47.5 / 21.3 | 45 | 45 |
| HM53-50700_LF V or H | 99.4 | 69.5 | 13.0 | 13.6 | 57.0 / 27.5 / 57.0 | 57.0 / 57.0 / 27.5 | 45 | 45 |
| HM53-607R0_LF V or H | 9.9 | 6.9 | 29.3 | 4.3 | 50.3 / 24.0 / 50.3 | 50.3 / 50.3 / 24.0 | 45 | 45 |
| HM53-60130_LF V or H | 19.2 | 13.5 | 29.5 | 4.8 | 59.0 / 28.0 / 59.0 | 59.0 / 59.0 / 28.0 | 45 | 45 |
| HM53-60350_LF V or H | 50.2 | 35.1 | 21.0 | 9.2 | 63.0 / 36.0 / 63.0 | 63.0 / 63.0 / 36.0 | 20 | 20 |

Notes: (1) Inductance is measured at 100kHz, 0.1V without DC current.
 (2) Value with rated DC current and the operating ETop across the inductor.

Outline Dimensions (mm)

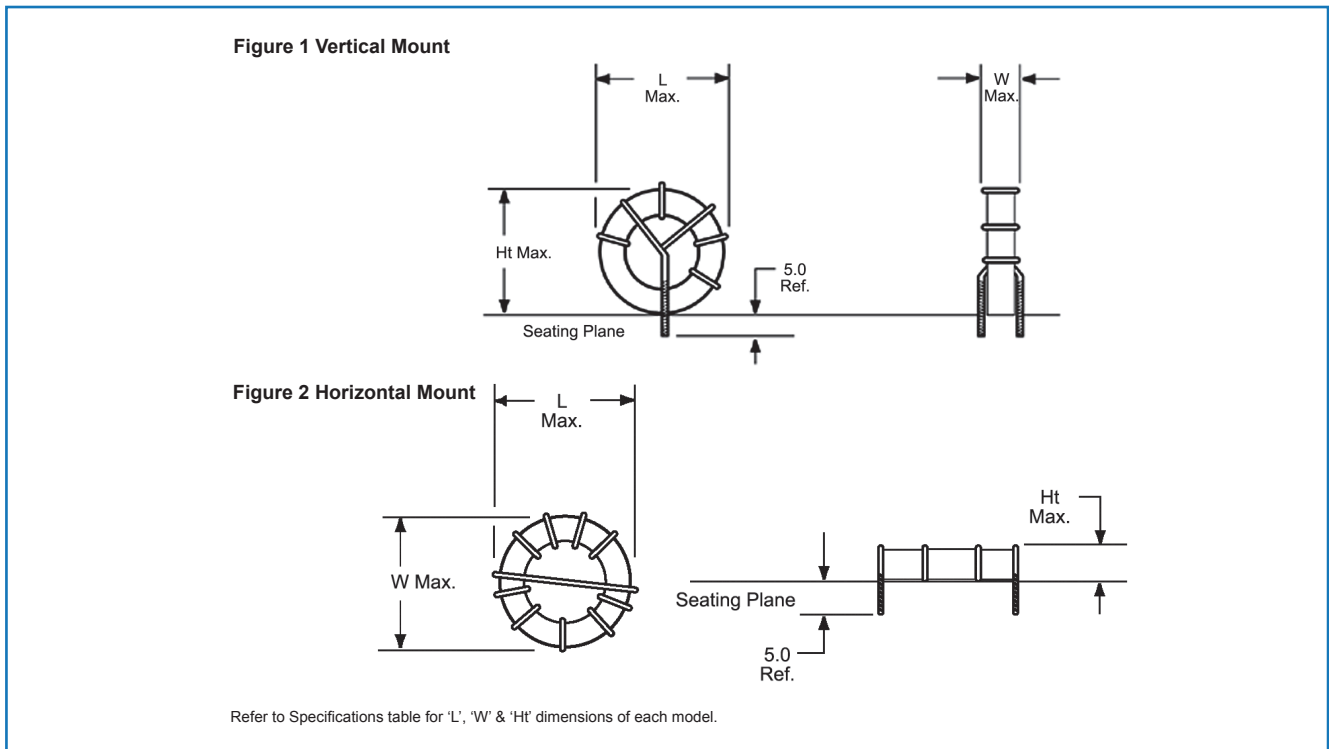

Ordering Information




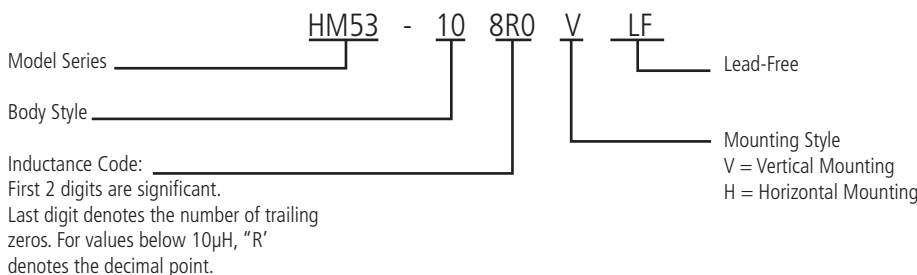


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Model HM53

Electrical Characteristics @ 25°C

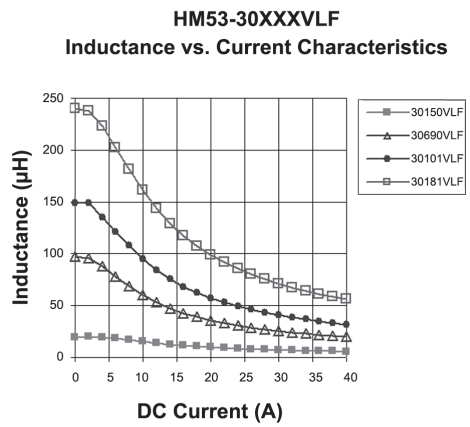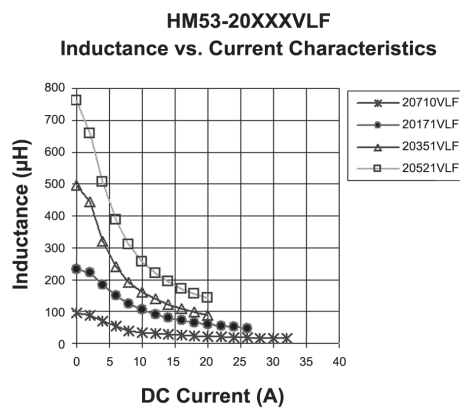
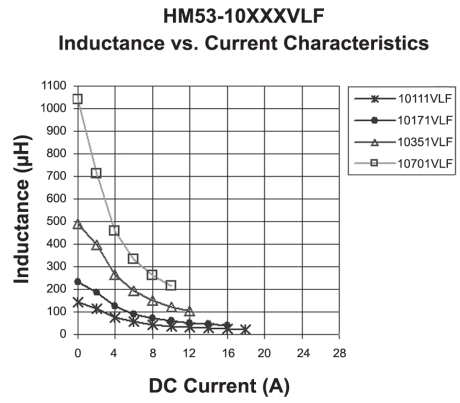
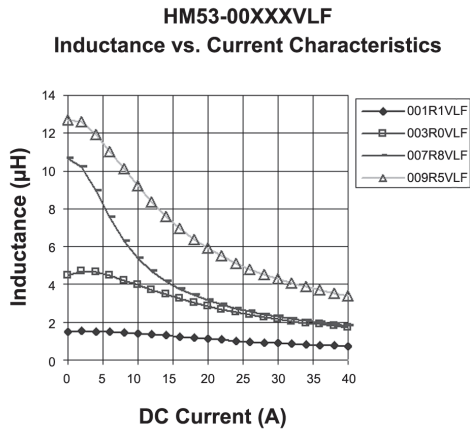


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Model HM53

Electrical Characteristics @ 25°C (Cont'd)

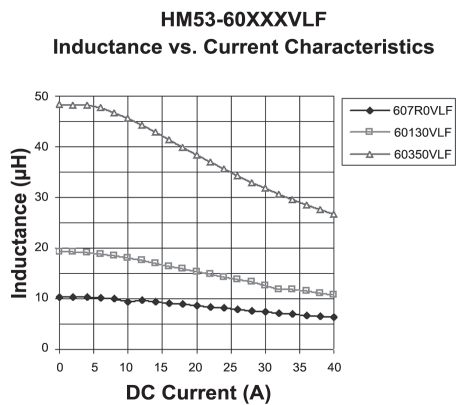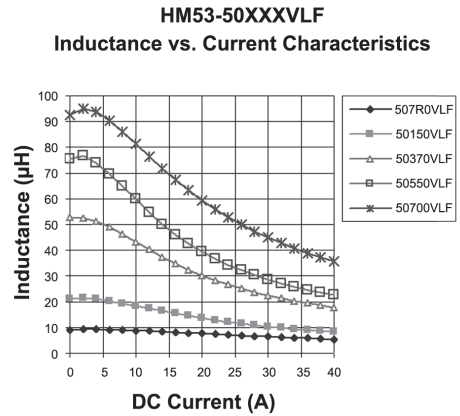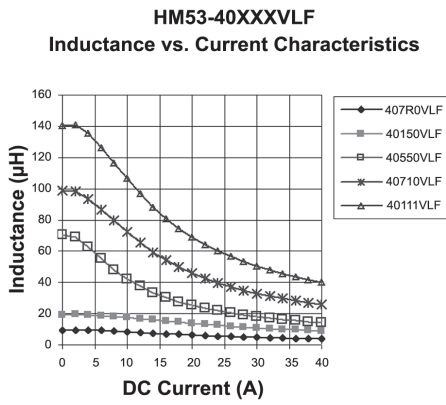

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.