





Leiterplatte
pcb

ohne / without

Mutter / nut
max. Einschraubtiefe 3.7 mm
thread depth max. 3.7 mm

Bolzen / bolt
max. Einschraubtiefe 5.5 mm
thread depth max. 5.5 mm




M 1:1

Anschlussbereich verzinkt
terminal area tin plating

Anforderungsstufe: 2
class: 2

194428	X			
194429			#4-40	
194430			M3	
194431		#4-40		
194432		M3		
Ident.-Nr. part-no.	ohne without	Mutter thread	Bolzen bolt	Bemerkung remark


Verpackt in Tray
Verpackungseinheit 30 St.
tray packaging
packaging unit 30 pcs

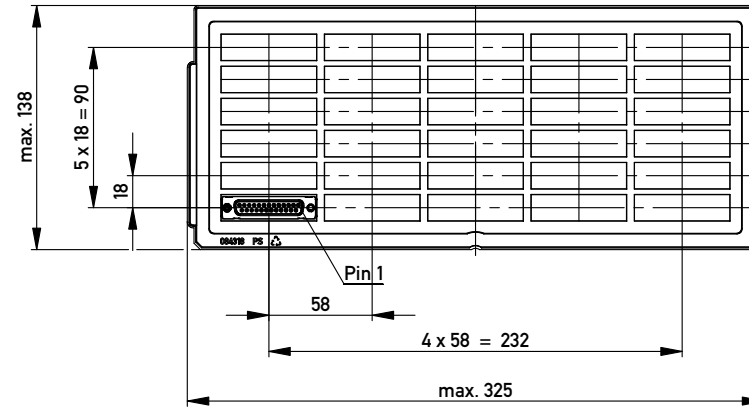

Sonstige Angaben siehe Zeichnung 204628 / Additional indications according to drawing 204628

Layoutvorschlag

recommended
layout:

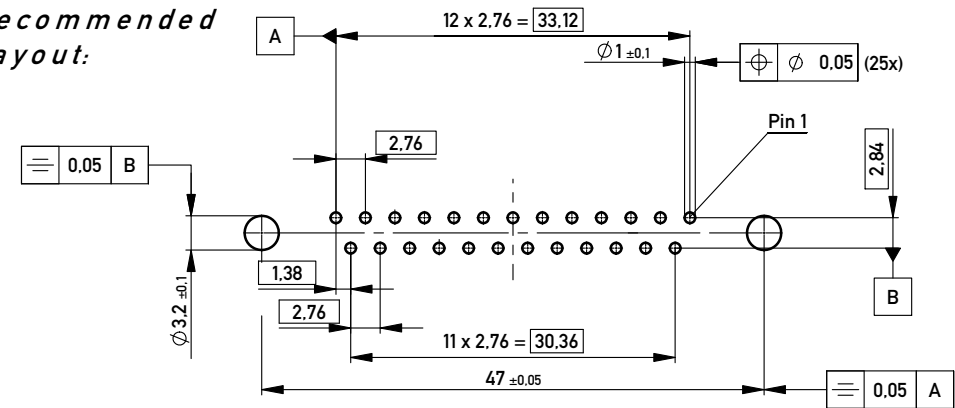

Fehlende Masse und Angaben siehe DIN 41652 / Missing information and dimensions according to DIN 41652
Sonstige Angaben siehe Fertigungsunterlagen / Additional indications according to the production documentation

Information: All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances	 All Dimensions in mm	Scale	2:1
	Subject to modification without prior notice. Drawing will not be updated.		Designation	
www.ERNI.com	TMC-S 25-TL-5.3-6.3-BA8 TMC-S 25-TL-5.3-6.3-type 8		144925	
	a Index	12.07.2012 Date	Class TMCS	I A3

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.