



SEMICONDUCTOR

DATA SHEET

UF1600FCT~UF1608FCT

ISOLATION UL TRAFAST RECOVERY RECTIFIERS

50 to 800 Volts 16 Amperes CURRENT

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- Ultra fast recovery times, high voltage.
- High temperature soldering : 260 °C/ 10 seconds at terminals
- Pb free product at available : 99% Sn above meet RoHS environment substance directive request

MECHANICAL DATA

- Case: ITO-220AB full molded plastic package
- Terminals: Lead solderable per MIL-STD-202, Method 208
- Polarity: As marked.
- Standard packaging: Any
- Weight: 0.08 ounces, 2.26grams.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

RETEMARAP	SYMBOL	UF1600FCT	UF1601FCT	UF1602FCT	UF1603FCT	UF1604FCT	UF1606FCT	UF1608FCT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	600	800	V
Maximum RMS Voltage	VRMS	35	70	140	210	280	420	560	V
Maximum DC Blocking Voltage	VDC	50	100	200	300	400	600	800	V
Maximum Average Forward Current .375"(9.5mm)	I _{AV}	16							A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	125							A
Maximum Forward Voltage at 8.0A	V _F	1.0		1.30		1.70		V	
Maximum DC Reverse current T _A =25°C at Rated DC Blocking Voltage T _A =125°C	I _R	10							μA
		500							
Typical Junction Capacitance (Note 1)	C _J	170				130			pF
Maximum Reverse Recovery Time (Note 2)	T _{RR}	50				75			ns
Typical Thermal Resistance (Note 3)	R _{JC}	2							°C/W
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-55 to +150							°C

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
2. Reverse Recovery Test Conditions: I_F=.5A, I_R=1A, I_{rr}=.25A.
3. Thermal resistance from Junction to ambient and from junction to lead 0.375" (9.5mm) P.C.B mounted.

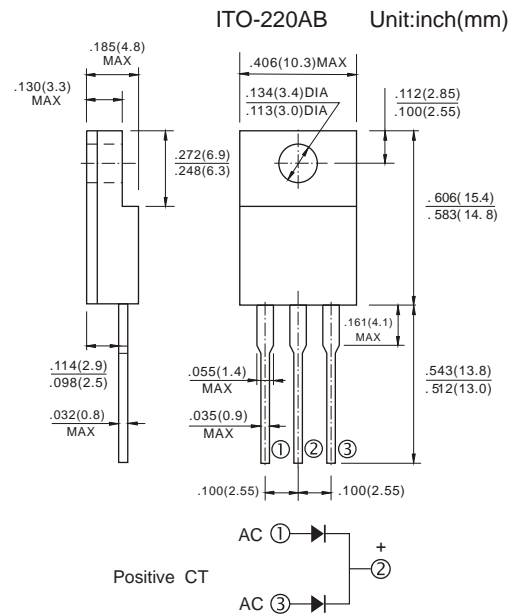

RATING AND CHARACTERISTIC CURVES

UF1600FCT~UF1608FCT

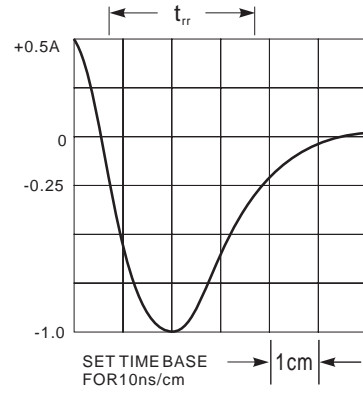
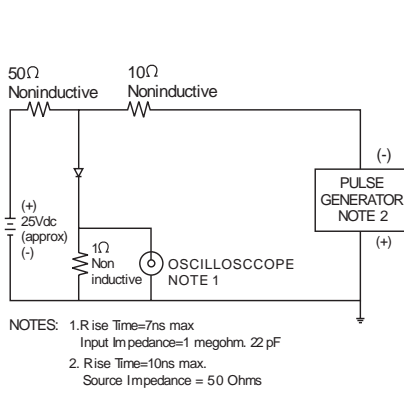


Fig.1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

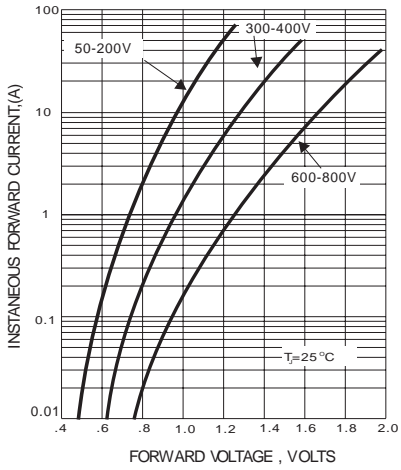


Fig.2- FORWARD CHARACTERISTICS

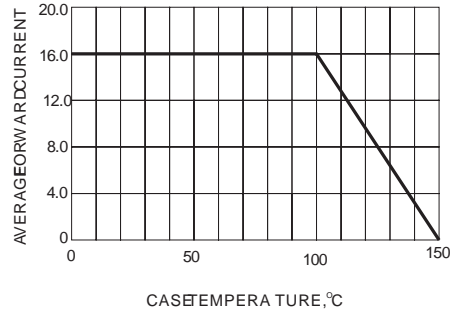


Fig.3-FORWARD CURRENT DERATING CURVE

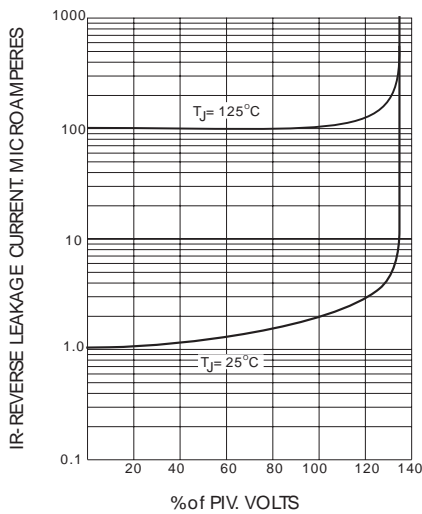


Fig.5- TYPICAL REVERSE CHARACTERISTICS

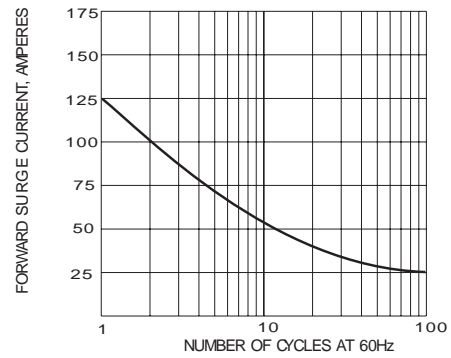


Fig.4-PEAK FORWARD SURGE CURRENT

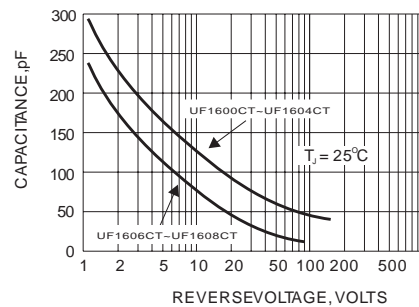


Fig.6-TYPICAL JUNCTION CAPACITANCE