



Series 830

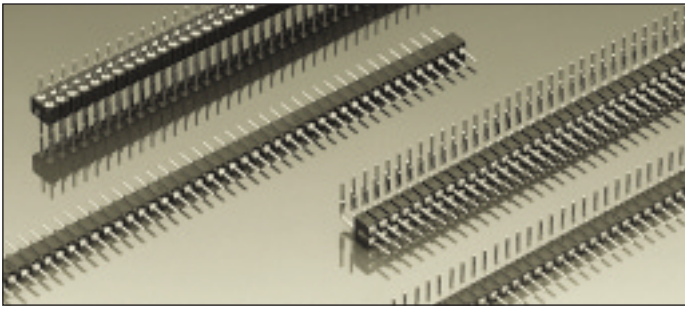


PCB connectors 2.0 mm
Single row / double row
Solder tail



"Hard metric"
PCB pin connectors, solder tail
Grid spacing 2.0x2.0 mm
Screw-machined pins
Ø 0.46-0.47 mm




For corresponding receptacles see pages 18, 20 and 21

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb


Ordering information

Replace **xxx** with the number of poles, e.g. 832-10-**xxx**-20-001 for a double row version with 8 pins per row becomes:
832-10-**016**-20-001

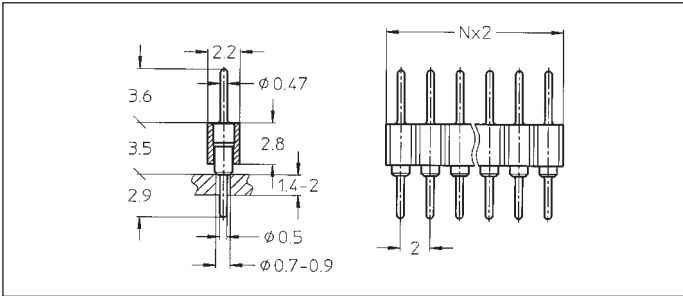


830-10-xxx-10-001
830-90-xxx-10-001

Straight pin connector: solder tail, single row
Availability from: 1 to 50 contacts
Standard number of contacts 50

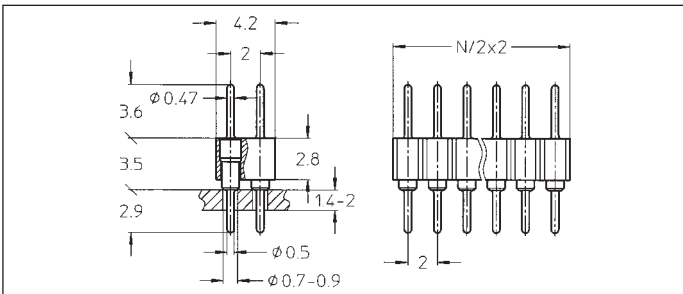


832-10-xxx-10-001
832-90-xxx-10-001

Straight pin connector: solder tail, double row
Availability from: 4 to 100 contacts
Standard number of contacts 100

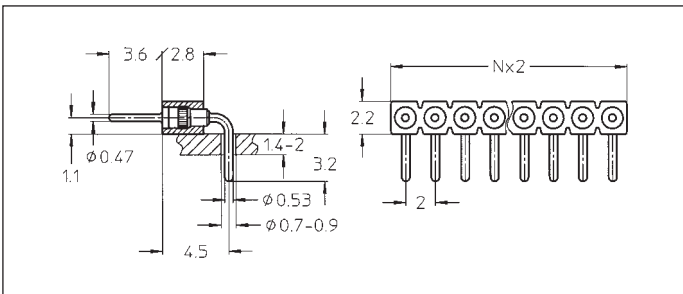

830-10-xxx-20-001
830-90-xxx-20-001

Right angle pin connector: solder tail, single row
Availability from: 1 to 50 contacts
Standard number of contacts 50

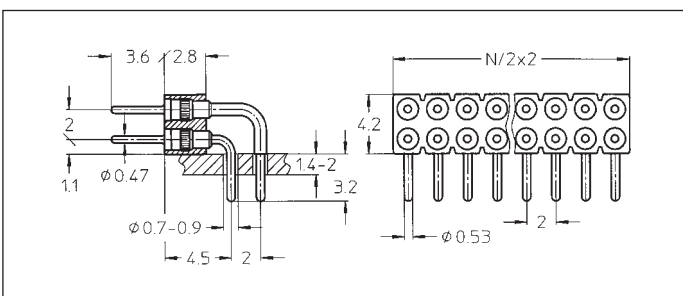

832-10-xxx-20-001
832-90-xxx-20-001

Right angle pin connector: solder tail, double row
Availability from: 4 to 100 contacts
Standard number of contacts 100