



# DSR0.5A THRU DSR0.5M

## Surface Mount Standard Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 0.5 A

### FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Ideal for automated placement
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

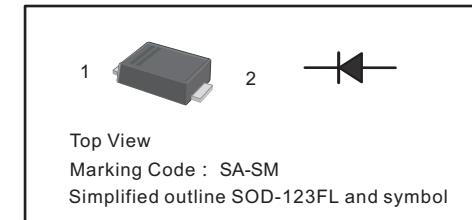

Top View

Marking Code : SA-SM

Simplified outline SOD-123FL and symbol

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	DSR0.5A	DSR0.5B	DSR0.5D	DSR0.5G	DSR0.5J	DSR0.5K	DSR0.5M	Units
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Ta = 65 °C	I <sub>F(AV)</sub>					0.5			A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>					20			A
Maximum Instantaneous Forward Voltage at 0.5A	V <sub>F</sub>				1.1				V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 125 °C	I <sub>R</sub>				5	50			µA
Typical Junction Capacitance <sup>1)</sup>	C <sub>j</sub>				30				pF
Typical Thermal Resistance <sup>2)</sup>	R <sub>θJA</sub>				80				°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>				-55 ~ +150				°C

1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

2 ) P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas.



## DSR0.5A THRU DSR0.5M

### Surface Mount Standard Rectifiers

#### Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

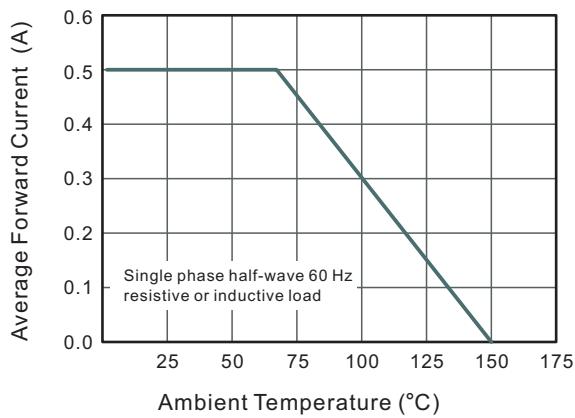


Fig.2 Typical Instantaneous Reverse Characteristics

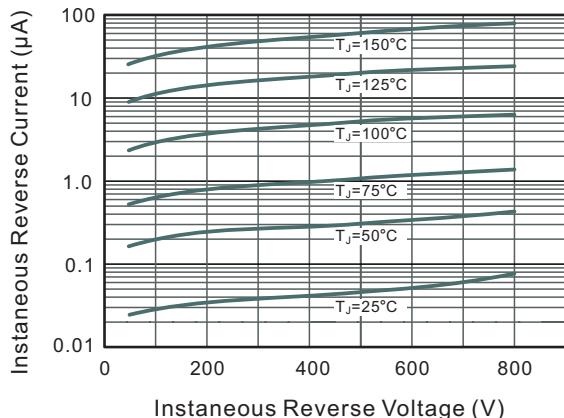


Fig.3 Typical Forward Characteristic


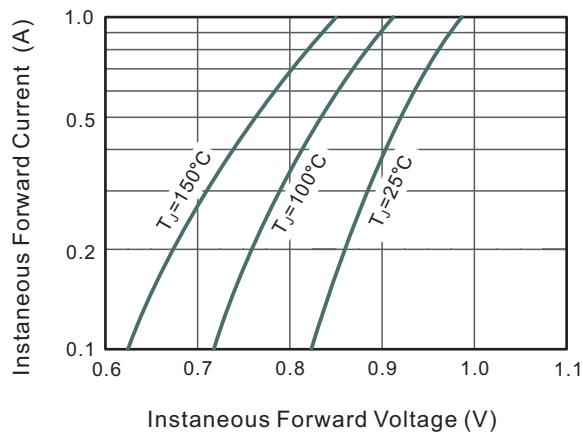


Fig.4 Typical Junction Capacitance



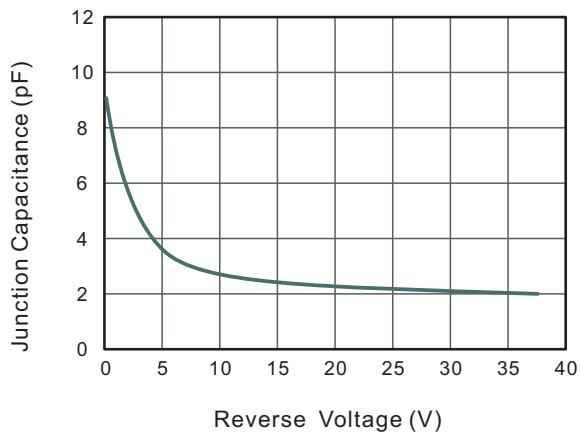


# DSR0.5A THRU DSR0.5M

## Surface Mount Standard Rectifiers


### PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123FL

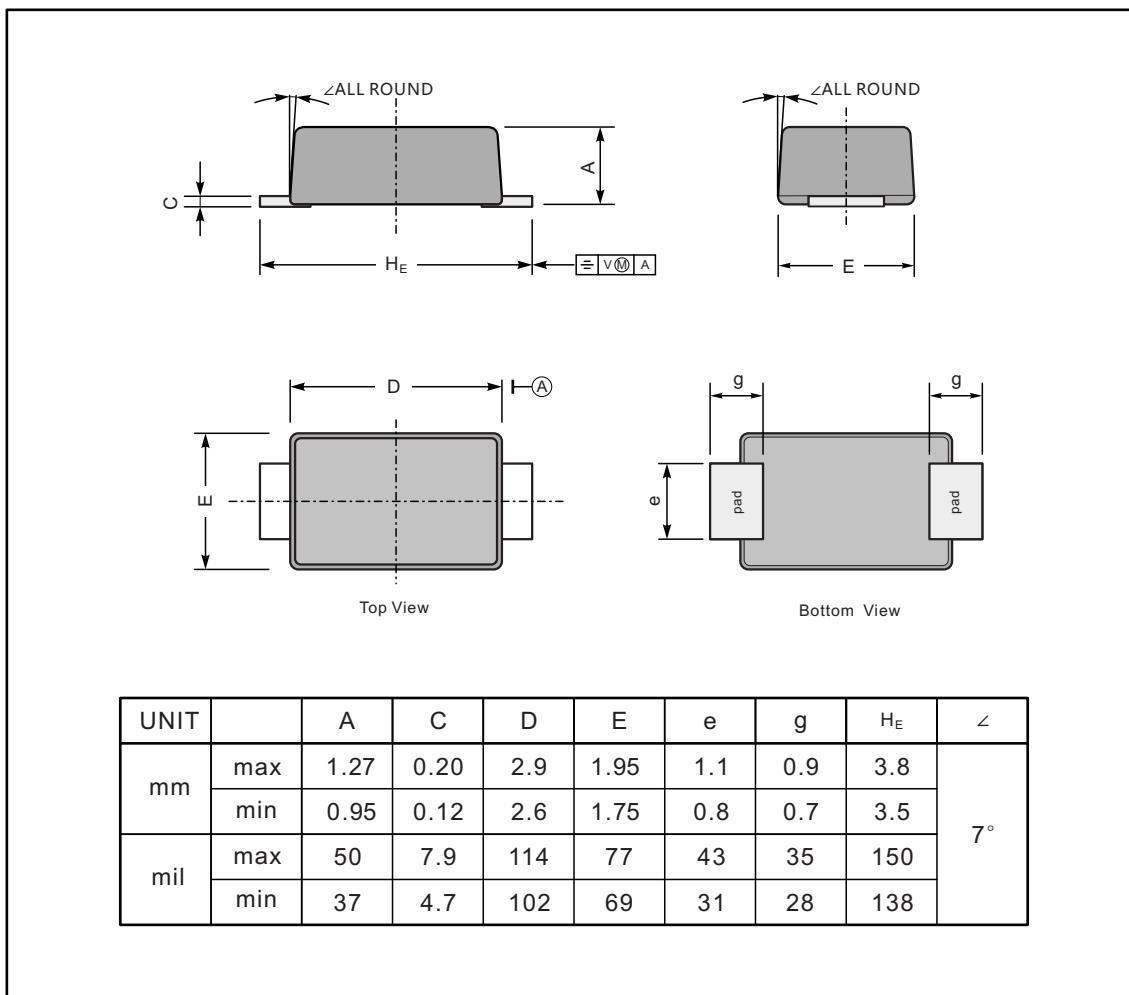

### The recommended mounting pad size

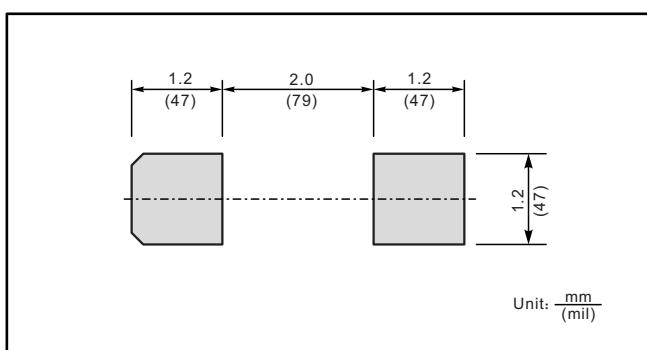

### Marking

Type number	Marking code
DSR0.5A	SA
DSR0.5B	SB
DSR0.5D	SD
DSR0.5G	SG
DSR0.5J	SJ
DSR0.5K	SK
DSR0.5M	SM