
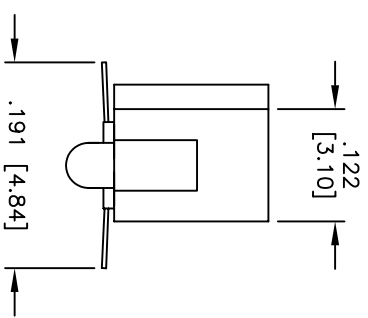
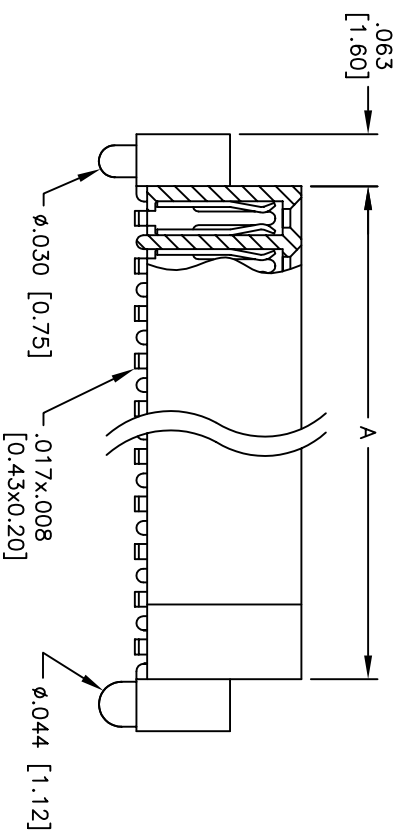
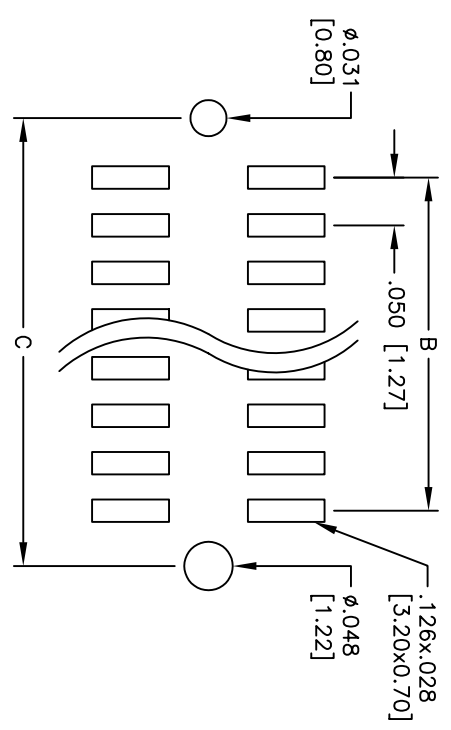


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/05	

APPROVED: _____
 DATE: _____ TITLE: _____

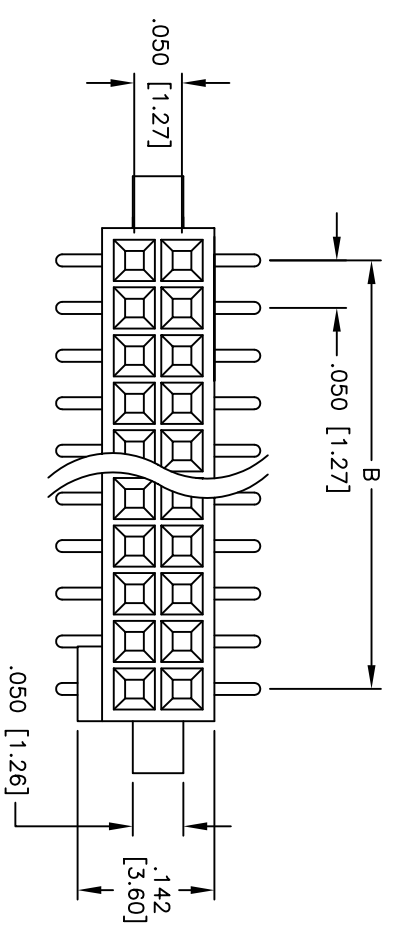

SPECIFICATIONS:

Material: Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall
 Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 10 thru 100
 A = .050 [1.27] x No. of Spaces + .815 [1.63]
 B = .050 [1.27] x No. of Spaces
 C = .050 [1.27] x No. of Spaces + .125 [3.18]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

0.050 [1.27] FEMALE HEADER, SMT WITH PEG OPTION

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	10/18/05	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	HHH-XX-T-SMT-P		
REF:	SCALE: NTS	SHEET 1 OF 1	