

1.6×1.2mm for Consumer Products



RoHS Compliant

Features

- Crystal unit for Consumer Products
- Ultra-miniature and low profile
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products
- 1seg. tuner

How to Order

CX1612DB 36000 □□ G E J CC
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Frequency
- ③ Load Capacitance
- ④ Frequency Tolerance
- ⑤ Operating Temp. Range
- ⑥ Frequency Temp. Stability
- ⑦ Individual Specification (STD specification is "CC")

B0	6 pF	G	±15×10 ⁻⁶
D0	8 pF		
EJ	-10 to +70°C		±15×10 ⁻⁶

Packaging (Tape & Reel 3000/ 20000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	26000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	
Frequency Tolerance	f _{tol}	±15	×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-10 to +70	°C	
Storage Temp. Range	T _{stg}	-40 to +85	°C	
Frequency Temp. Characteristics	f _{tem}	±15	×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
26000 ≤ f _{nom} < 37400 kHz	150Ω max.
37400 ≤ f _{nom} < 50000 kHz	80Ω max.
50000 ≤ f _{nom} ≤ 60000 kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
26000 ≤ f _{nom} ≤ 60000 kHz	10μW (100μW max.)

Dimensions

(Unit: mm)

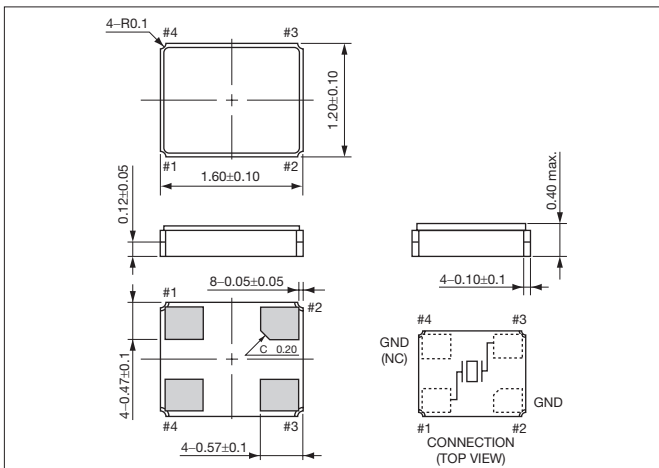

Recommended Land Pattern

(Unit: mm)

