


# MPA300L Series

## Low Profile 300W Single Output Power Factor Corrected AC/DC Power Supplies

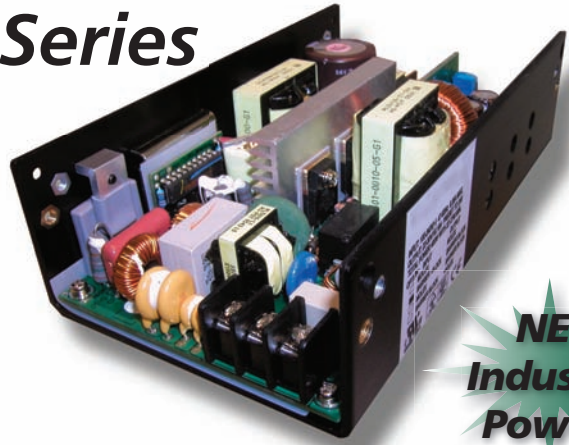

**NEW  
Industrial  
Power!!**

### Key Features:

- 300W Output Power
- Universal 90-264V AC Input
- PFC to EN61000-3-2 "D"
- UL, cUL, TUV Approvals
- CE Certified
- FCC Class B Emissions
- 12V to 55V Outputs
- Remote Sense /Remote On/Off
- Three Mechanical Options

### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Universal	90		264	VAC
Input Frequency		47		63	Hz
Input Current, Full Load	90 - 264 VAC		8		A
Inrush Current, Cold Start	110 VAC			17.5	A
	220 VAC			35	A
Leakage Current (Note 1)	240 VAC		1.5		mA
Power Factor Correction	Active, Meets EN61000-3-2 Class D				
Input Protection	T8A/250V Fuse				

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Adjustment	By Trim Pot		±5.0		%
Output Regulation (Note 2)			±1.0		%
Hold Time	80% Load		20		mSec
Ripple & Noise (20 MHz) (Note 3)	See Model Selection Guide				
Overload Protection	Hiccup Mode	110		140	%
Over Voltage Protection	>130% of Rated Output Voltage. Recycle AC Input.				
Over Temperature Protection	>+85°C Ambient with Autorecovery				
Temperature Coefficient			±0.04		%/°C
Transient Recovery Time (Note 4)	50% Load Change		2.5		mS
Transient Response Deviation			5		%
Overshoot/Undershoot	At Turn On/Off			5.0	%
Turn On Delay	120 VAC			1	S
Output Short Circuit	Continuous With Autorecovery				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input - Output	3,000			VAC
	Input - FG (Frame Ground)	1,500			
	Primary - Core	1,500			
Switching Frequency	Fixed		23		kHz

#### Interface Signals

Power Supply On	Bi-Color LED on the PCB, Green for power ON, Orange when protection is enabled or the the unit is inhibited (see remote On/Off)
Power Good Signal	PG on CN3. Goes TTL high 100 to 500 mS after regulation. Goes low at least 1 mS before the loss of regulation. Will sink 100 mA.
Remote Sense	V1S + and V1S- on CN3. Compensates for up to a 0.5V line drop. (not on models with current share option)
Remote On/Off	INH on CN3. A TTL low signal inhibits the output

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	0	+25	+50	°C
Output Derating	2.5%/ °C from +50 °C to +70 °C				
Storage Temperature Range		-20		+85	°C
Cooling	See Model Selection Guide				
Operating Humidity	RH, Non-condensing			90	%
Vibration, 5 ~ 50 Hz	Acceleration of ±7.35 m/(S x S) on X, Y and Z axis				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 30°C, Gnd Benign	100			kHours
Safety Standards	UL 60950; CSA C22.2 No. 60950; TUV EN60950; CB Report (IEC 60950)				
EMI Compliance	Compliance to EN55022 (CISPR22) Class B; EN61000-3-2,3				
EMS Immunity Compliance	EN61000-4-2,3,4,5,6,8,11; EN55024; CE Marked (LVD)				



**CB**

**RoHS**

**PFC  
ACTIVE**

### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



## Model Selection Guide

Model Number	Output Voltage		Output Current (Notes 6, 7, 8)			Ripple & Noise	Efficiency (Note 7)
	Factory PreSet	Range (Note 5)	("U" units) Max. with 22 CFM	Min	"E" Units Int. Fan		
MPA300Lx-12zz	12 VDC	12.0 - 15.0 VDC	25.00A	0.0A	25.00A	1% p-p	80%
MPA300Lx-18zz	18 VDC	16.0 - 21.0 VDC	18.75A	0.0A	18.75A	1% p-p	80%
MPA300Lx-24zz	24 VDC	22.0 - 30.0 VDC	13.64A	0.0A	13.64A	1% p-p	80%
MPA300Lx-36zz	36 VDC	31.0 - 41.0 VDC	9.68A	0.0A	9.68A	1% p-p	80%
MPA300Lx-48zz	48 VDC	42.0 - 55.0 VDC	7.15A	0.0A	7.15A	1% p-p	80%

### Notes:

- Models are available with leakage current specified as low as 750  $\mu$ A. Contact the factory for details.
  - Output regulation includes line & load.
  - Ripple & noise is measured from 10 Hz to 20 MHz. Measurement connection to the unit is made with a 0.1  $\mu$ F ceramic capacitor & a 22  $\mu$ F electrolytic capacitor connected in parallel.
  - Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- The full output range (see table above) is covered in the safety agency certification. Standard models are factory set to the "Preset" voltage. This may be set to other levels within the range without affecting the agency certification. Contact the factory for details.
  - A minimum 1% load is required to maintain load regulation and ripple specifications.
  - Output current is given for the factory preset voltage. For more information, contact the factory.
  - Units will provide peak power of 900W for 500  $\mu$ s. For units capable of longer durations, contact the factory.

### Input Connector CN1:

#### U-Chassis (U,A)

Howder Terminal Block No. HI-201-39 (3-pin), 9.5 mm center or Mating Molex Part No. 09-91-0500 (5 pin, 3 used) or equivalent.

#### Enclosed with Fan (E)

Dinkle Terminal Block No. DT-35-A02W-3 (3-pin).

### Output Connector CN2:

Howder Terminal Block No. HD-121-6P (6-pin) or Mating Molex Part No. 09-91-2000 (14 pin) or equivalent.

### Output Pin Assignment:

Howder	Molex
Pins 1 ~ 3: V+	Pins 1 ~ 7: V+
Pins 4 ~ 6: V-	Pins 8 ~ 14: V-


### Logic Signal Connector CN3:

Mating JST XHP-5 or equivalent (CHYAO SHI-UNN JS-2001-05).

### Fan driver connector (FAN):

12 VDC / 400 mA is available to drive an external fan. Mating JST XHP-2 or equivalent (CHYAO SHIUNN JS-2001-02).

## Mechanical Dimensions: U-Chassis (U Suffix)

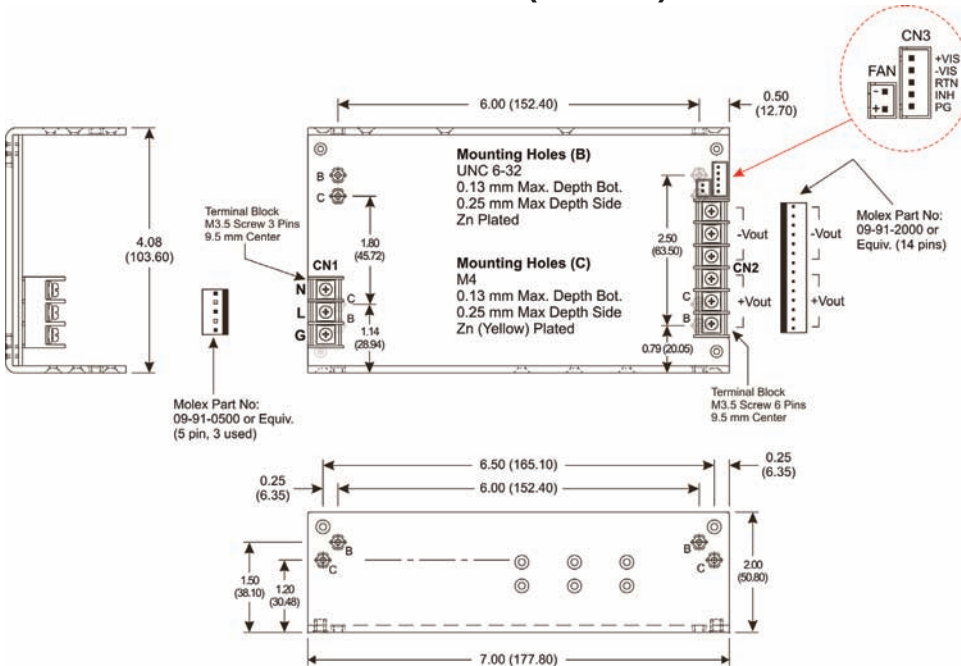

## MPA300LX-YYZZ

### Mechanical Configuration


U = U-Chassis  
C = U-Chassis with Cover  
E = Enclosed with End Fan

Output Voltage Selection  
(i.e. 12 = 12 VDC, 24 = 24 VDC, etc)


Input/Output Connector Type  
T = Terminal Block  
M = Molex (No Input Molex On "E" Unit)

Conformal Coating  
Blank = No Coating  
S = Conformal Coating

## Enclosure With Fan (E Suffix)

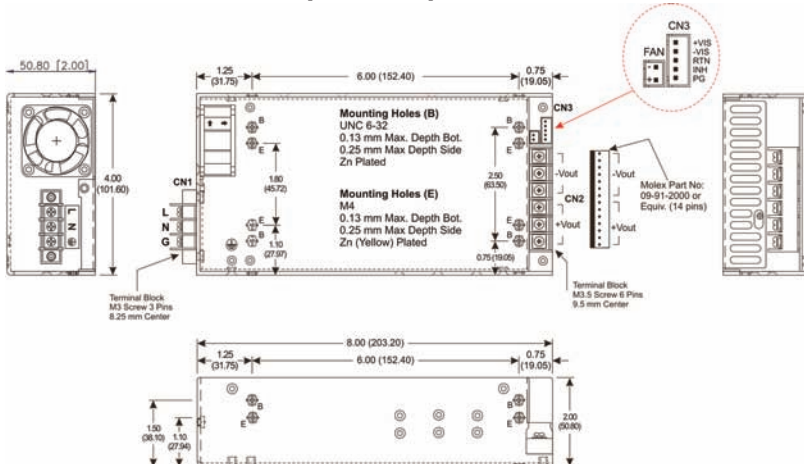

## U-Chassis Cover (C Suffix)

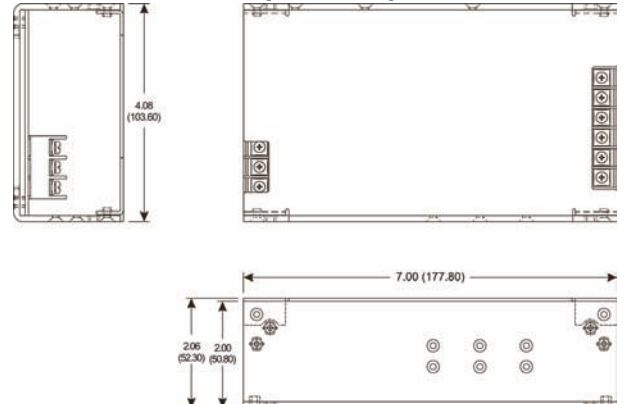

**MicroPower Direct**  
www.micropowerelectronics.com